



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO





INTER 120
SLIDING SYSTEM



Certified sliding system, allows to manufacture doors in different configurations.

	AVERAGE PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	STD ASTRAGAL AND INTERLOCKS	HD ASTRAGAL REINF. INTERLOCKS	LOAD CAPACITY
SMALL MISSILE IMPACT					
MIN	30"	82"	9/16" OVERALL LAMINATED GLASS	9/16" OVERALL LAMINATED GLASS	80.0 PSF
			1-5/16" OVERALL INSUL. LAM. GLASS	1-5/6" OVERALL INSUL. LAM. GLASS	
MAX	48"	120"	N/A	9/16" OVERALL LAMINATED GLASS	80.0 PSF
	36"	120"	N/A	1-5/6" OVERALL INSUL. LAM. GLASS	80.0 PSF
LARGE MISSILE IMPACT					
MIN	30"	82"	9/16" OVERALL LAMINATED GLASS	9/16" OVERALL LAMINATED GLASS	80.0 PSF
MAX	48"	120"	N/A	9/16" OVERALL LAMINATED GLASS	80.0 PSF


SMI

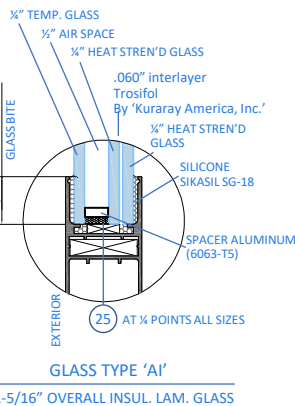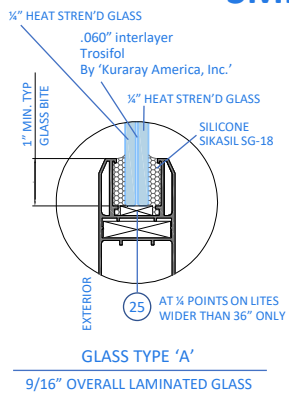

LMI

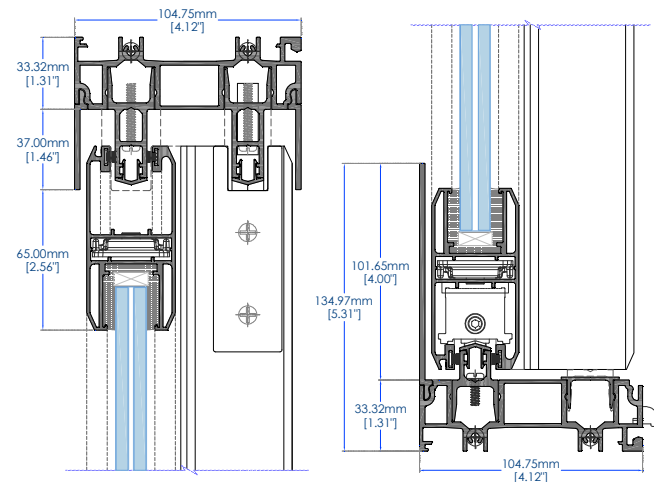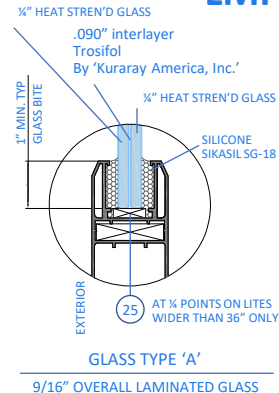

INTERLOCK AND ASTRAGAL

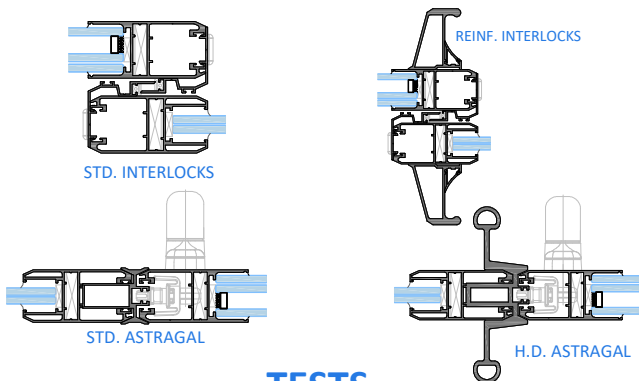

TESTS

- Approved for use in HVHZ
- Impact Resistant
- TAS-201, TAS-202, TAS-203

COLORS

In stock



White




Bronze



Black

Custom colors and finishes require a minimum order per unit.

OPENINGS

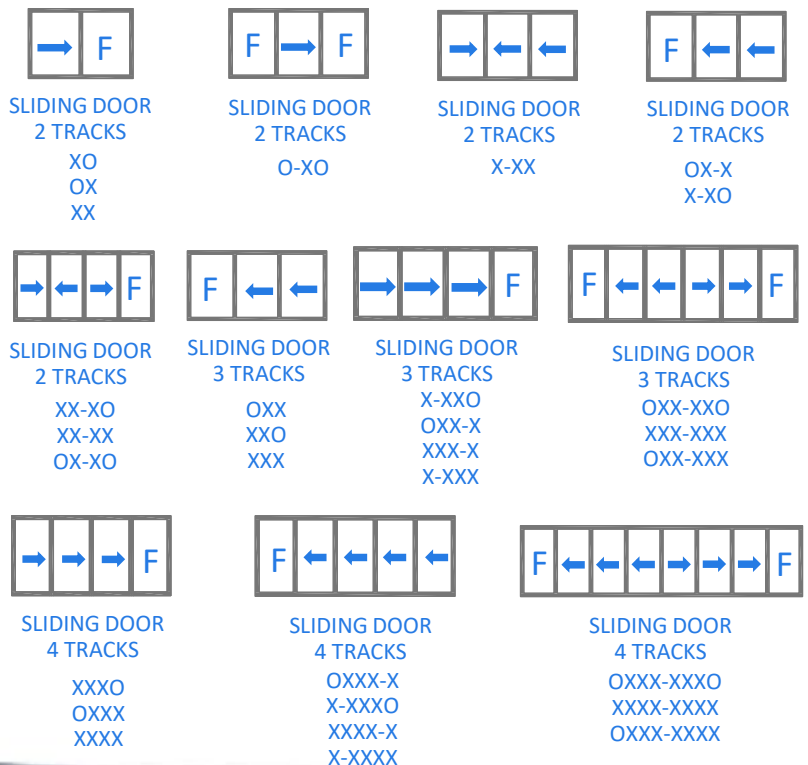



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO




INTER 120
STOREFRONT

INTER 120


Certified Storefront system, rated for small missile impact.

	WIDTH INCHES	FRAME HEIGHT INCHES	GLASS TYPE	LOAD CAPACITY
SMALL MISSILE IMPACT				
MIN	30"	96"	9/16" OVERALL LAMINATED GLASS	80.0 PSF
			1-5/16" OVERALL INSUL. LAM. GLASS	
MAX	30"	120"	9/16" OVERALL LAMINATED GLASS	80.0 PSF
			1-5/16" OVERALL INSUL. LAM. GLASS	

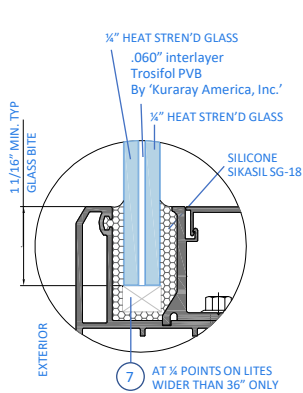


GLASS TYPE 'A'

9/16" OVERALL LAMINATED GLASS

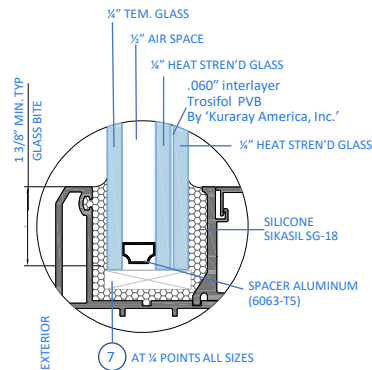



GLASS TYPE 'AI'

1-5/16" OVERALL INSUL. LAM. GLASS

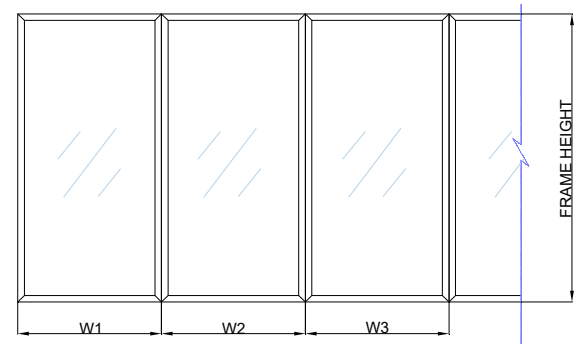

$$\text{WIDTH (W)} = \frac{W1 + W2}{2}$$

AT FRAME MULLION

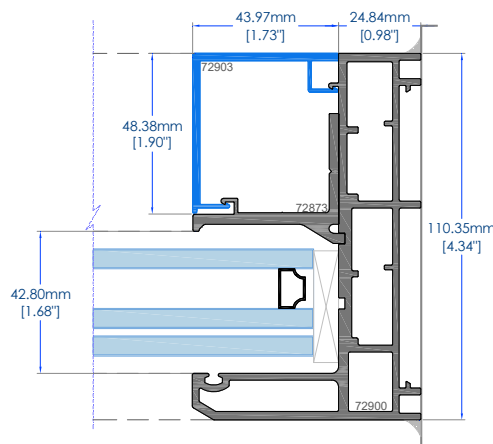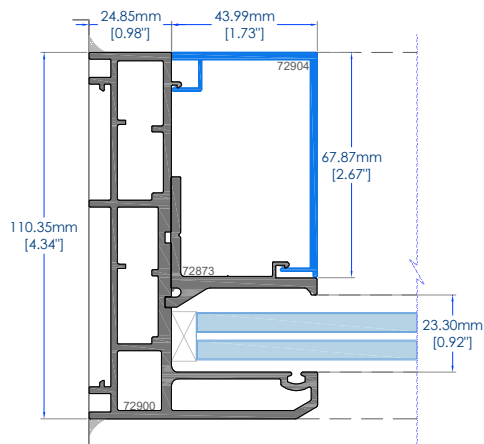

TESTS

- Approved for use in HVHZ
- Impact Resistant
- TAS-201, TAS-202, TAS-203

COLORS

In stock



White




Bronze



Black

Custom colors and finishes require a minimum order per unit.

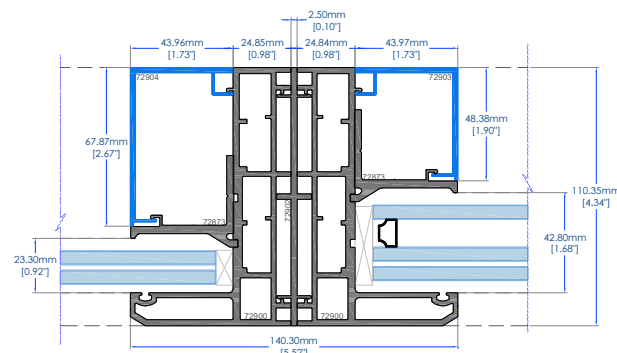

MULLION



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO





INTER 180
SLIDING SYSTEM


INTER 180

Certified sliding system, allows to manufacture doors in different configurations.


	AVERAGE PANEL WIDTH INCHES	DOOR FRMAE HEIGHT INCHES	GLASS TYPE	LOAD CAPACITY
SMALL MISSILE IMPACT				
MIN	36"	84"	9/16" OVERALL LAMINATED GLASS	140.0 PSF
			1-5/6" OVERALL INSUL. LAM. GLASS	
MAX	60"	120"	9/16" OVERALL LAMINATED GLASS	123.0 PSF
			1-5/6" OVERALL INSUL. LAM. GLASS	
LARGE MISSILE IMPACT				
MIN	36"	84"	9/16" OVERALL LAMINATED GLASS	140.0 PSF
MAX	60"	120"		123.0 PSF

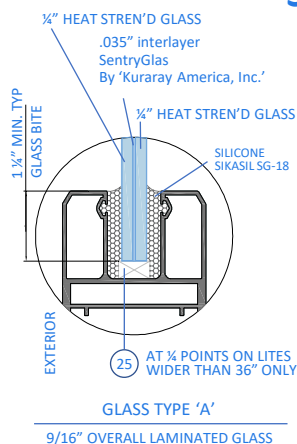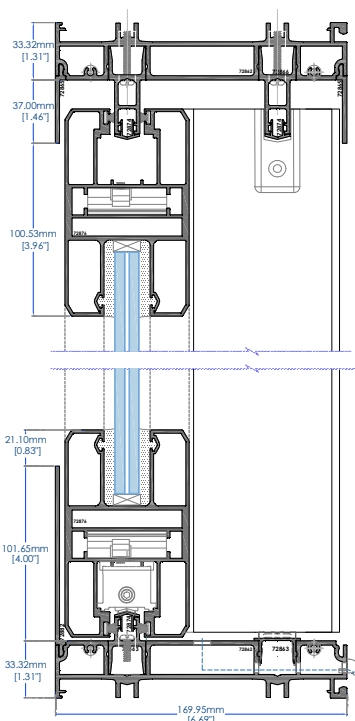

SMI

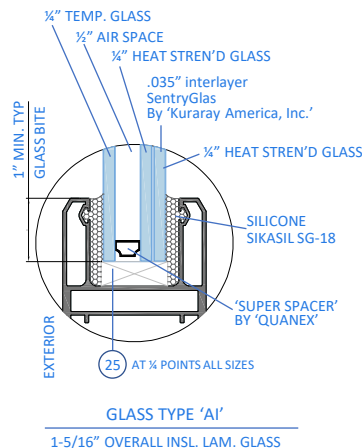


LMI

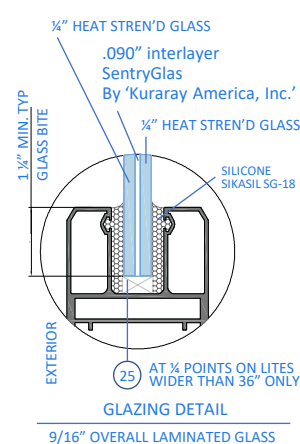

TESTS

- Approved for use in HVHZ
- Impact Resistant
- TAS-201, TAS-202, TAS-203

ADDITIONAL TRACK FRAME HEAD/SILL



COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a minimum order per unit.

OPENINGS



SLIDING DOOR
2 TRACKS

XO
OX
XX



SLIDING DOOR
2 TRACKS

O-XO
OXX




SLIDING DOOR
2 TRACKS

X-XX
X-XX



SLIDING DOOR
2 TRACKS

OX-X
X-XO




SLIDING DOOR
2 TRACKS

XX-XO
XX-XX
OX-XO



SLIDING DOOR
3 TRACKS

OXX
XXO
XXX



SLIDING DOOR
3 TRACKS

X-XXO
OXX-X
XXX-X
X-XXX




SLIDING DOOR
3 TRACKS

OXX-XXO
XXX-XXX
OXX-XXX



SLIDING DOOR
4 TRACKS

XXXO
OXXX
XXXX



SLIDING DOOR
4 TRACKS

OXXX-X
X-XXXX
XXXX-X
X-XXXX



SLIDING DOOR
4 TRACKS

OXXX-XXXO
XXXX-XXXX
OXXX-XXXX



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO




INTER 180
STOREFRONT






Certified Storefront system, rated for small and large missile impact.

	AVERAGE PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	GLASS TYPE	LOAD CAPACITY
SMALL MISSILE IMPACT				
MIN	30"	96"	9/16" OVERALL LAMINATED GLASS	140.0 PSF
			1-5/16" OVERALL INSUL. LAM. GLASS	
MAX	61 5/8"	120"	9/16" OVERALL LAMINATED GLASS	130.6 PSF
			1-5/16" ERALL INSUL. LAM. GLASS	
LARGE MISSILE IMPACT				
MIN	30"	96"	9/16" OVERALL LAMINATED GLASS	140.0 PSF
MAX	61 5/8"	120"	9/16" OVERALL LAMINATED GLASS	130.6 PSF

SMI

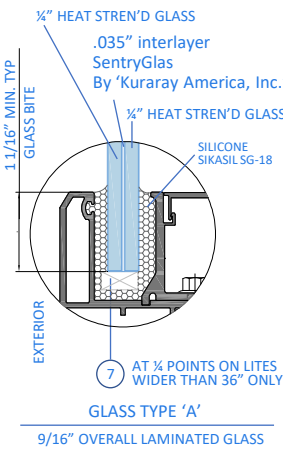

LMI

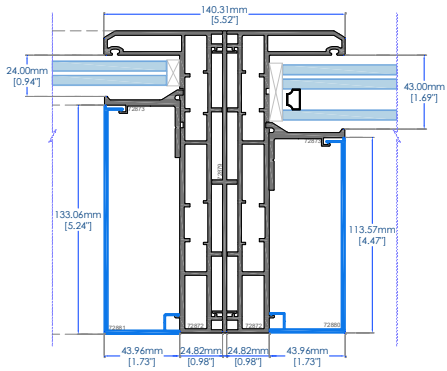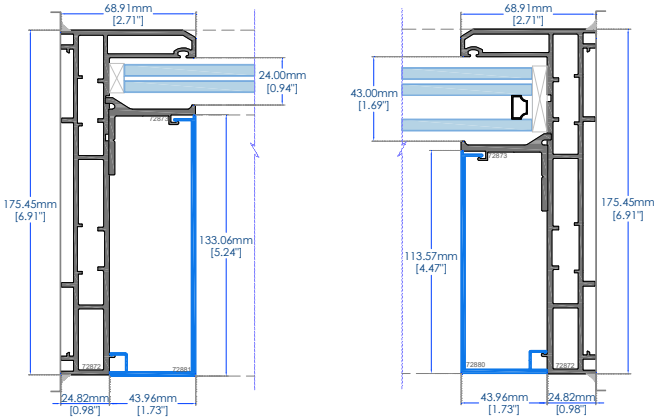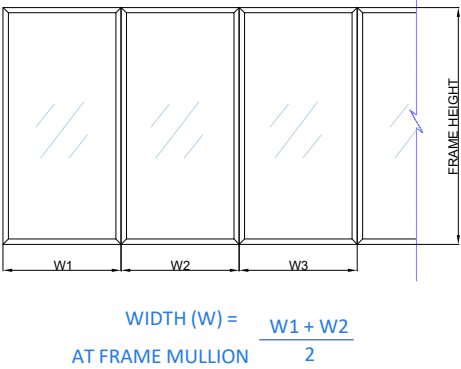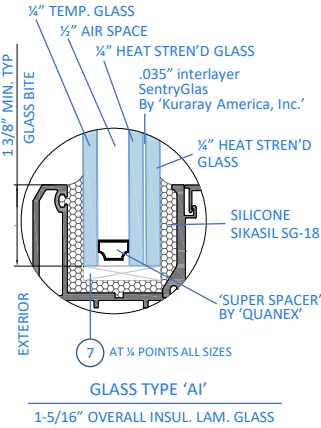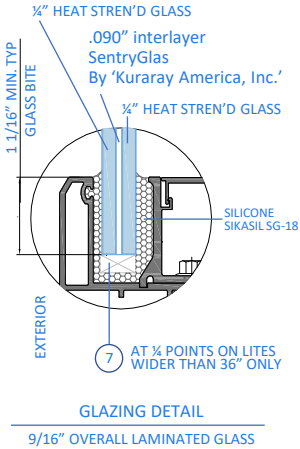

MULLION

COLORS



Custom colors and finishes require a minimum order per unit.

TESTS

- Approved for use in HVHZ
- Impact Resistant
- TAS-201, TAS-202, TAS-203