



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO



INTER RPT59i

THERMAL BREAK SERIES

INTER RPT 59i


Swing system, allows to manufacture doors and windows in different configurations.

Advantages


- Easy maintenance
- Maximun thermal and acustic isolation

Technical features


- Glass thickness fixed:
 - Min. 0.73" – Max. 1.52"
- Window and door glass thickness :
 - Min. 1.12" – Max. 1.91"

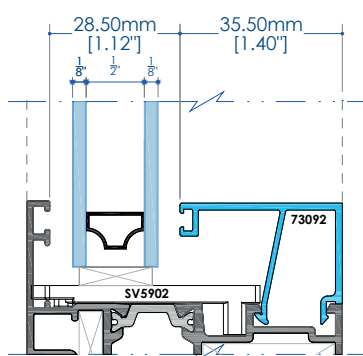


INSULATED

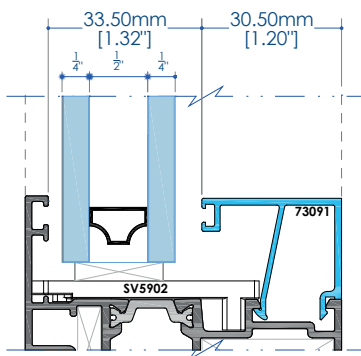


INSULATED

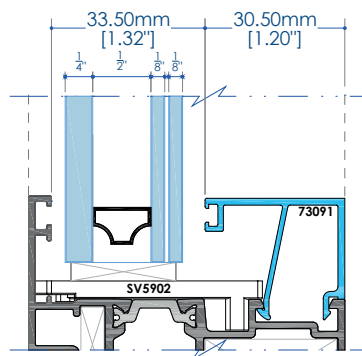



LAMINATED
INSULATED

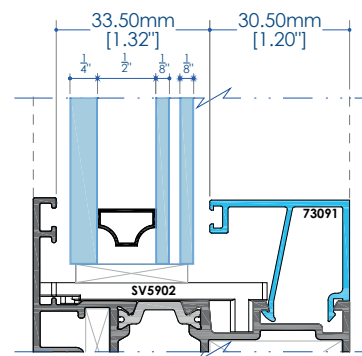


LAMINATED
INSULATED

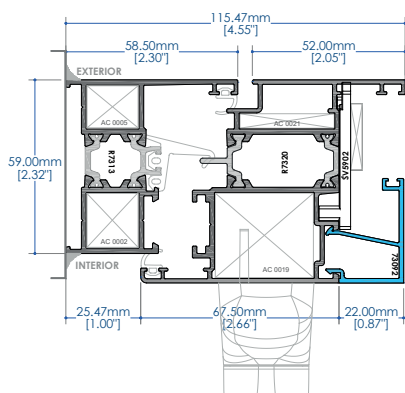


SWING IN DOOR
SYSTEM

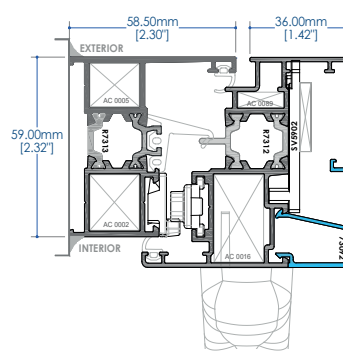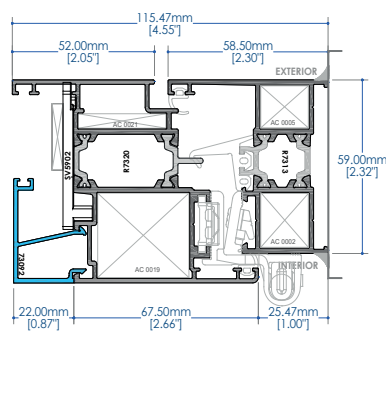


SWING IN
WINDOW SYSTEM

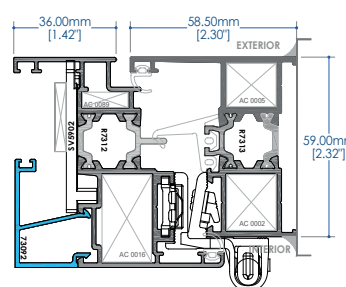


OPENING




Swing
window



Swing window
+ Fixed



Double swing
window

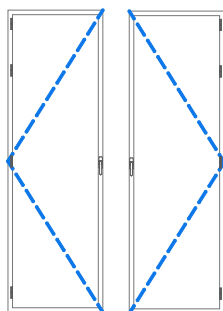

Swing Door

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.

INTER RPT 59i


Fixed system, allows to manufacture doors and windows in different configurations.

Advantages

- Easy maintenance
- Maximum thermal and acoustic isolation

Technical features

- Glass thickness fixed:
 - Min. 0.73" – Max. 1.52"
- Window and door glass thickness :
 - Min. 1.12" – Max. 1.91"

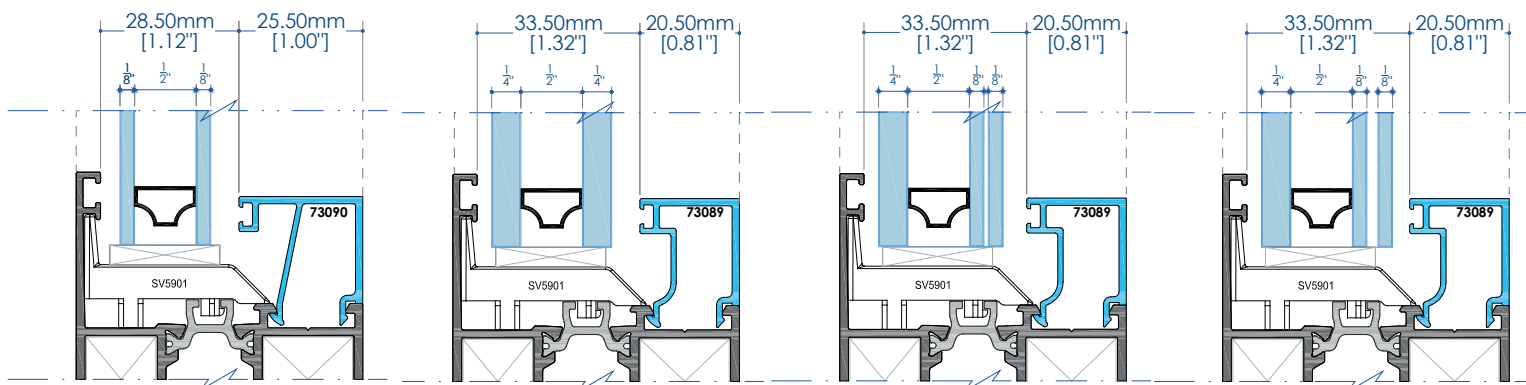


INSULATED


INSULATED

LAMINATED
INSULATED


LAMINATED
INSULATED

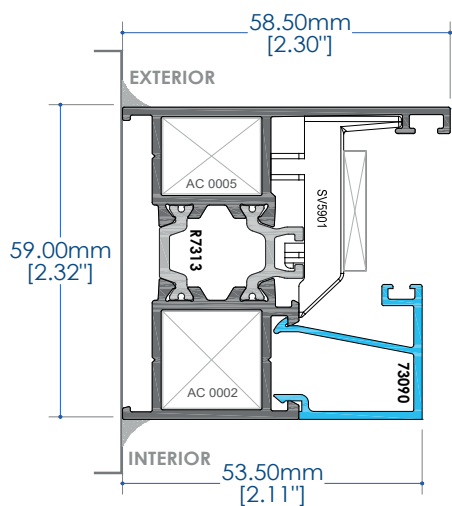

FIXED

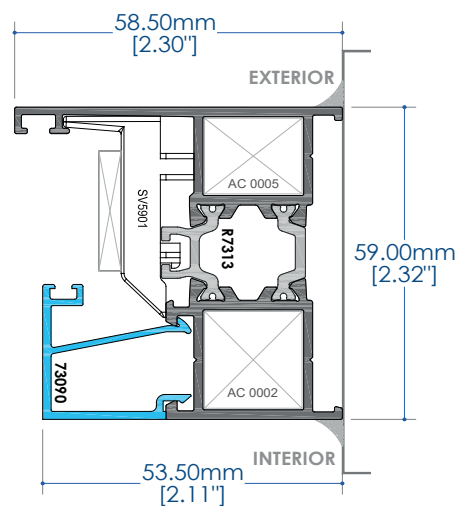

OPENING

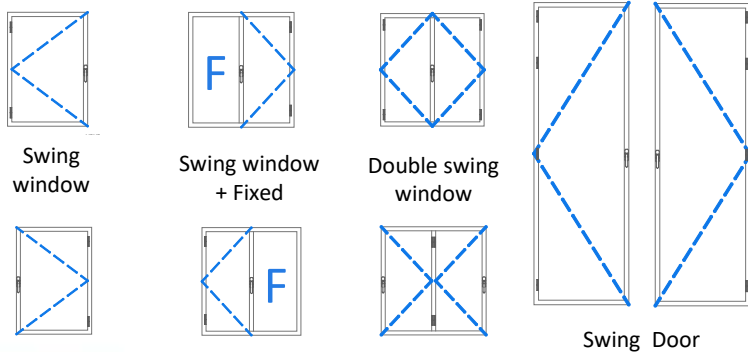

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO



INTER RPT 65i
THERMAL BREAK SERIES

INTER RPT 65i


Swing, fixed and hopper system, allows to manufacture doors and windows in different configurations.

Advantages


- Easy maintenance
- Maximum thermal and acoustic isolation

Technical features


- Glass thickness:
 - Min. 0.96" – Max. 1.75"
- Window and door glass thickness :
 - Min. 1.36" – Max. 2.15"

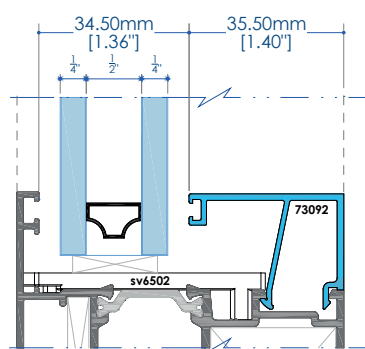


INSULATED

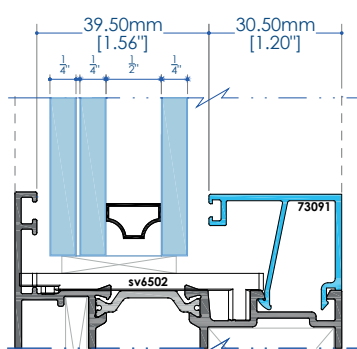


LAMINATED INSULATED

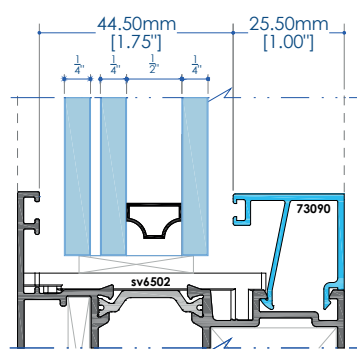



LAMINATED INSULATED

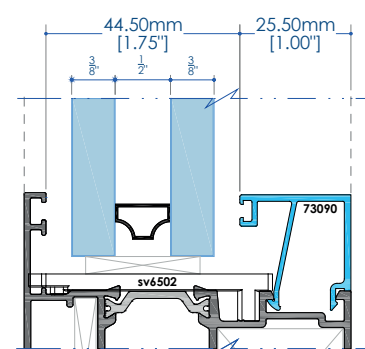


INSULATED

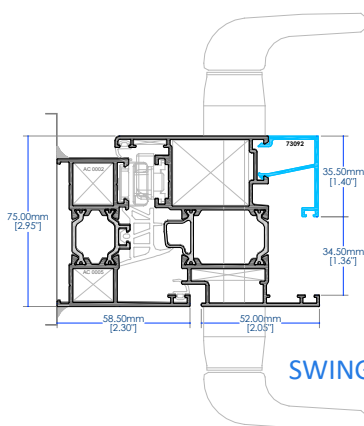


SWING IN DOOR SYSTEM

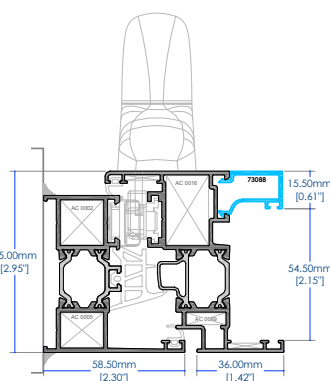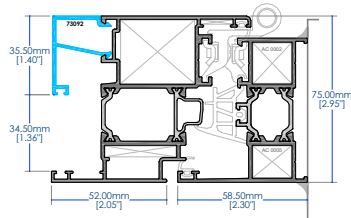

SWING IN WINDOW SYSTEM

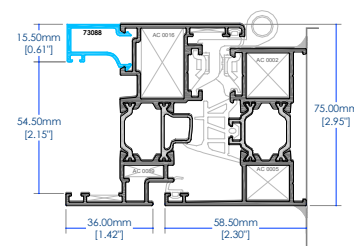

OPENING

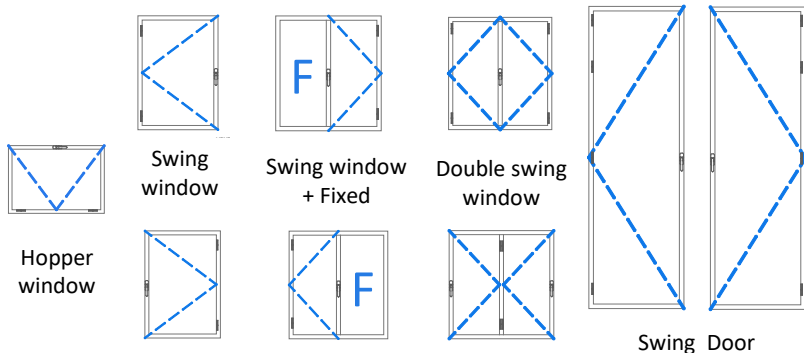

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.

INTER RPT 65i

Swing, fixed and hopper system, allows to manufacture doors and windows in different configurations.


Advantages

- Easy maintenance
- Maximum thermal and acoustic isolation


Technical features

- Glass thickness:
 - Min. 0.96" – Max. 1.75"
- Window and door glass thickness :
 - Min. 1.36" – Max. 2.15"


FIXED

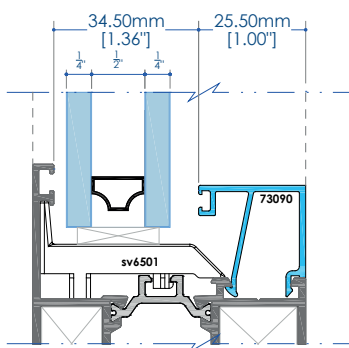


INSULATED

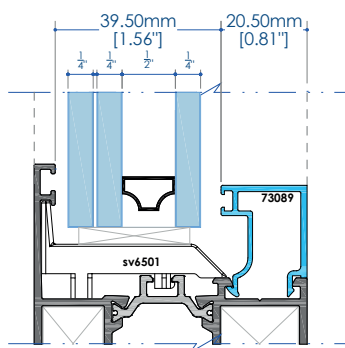


LAMINATED INSULATED

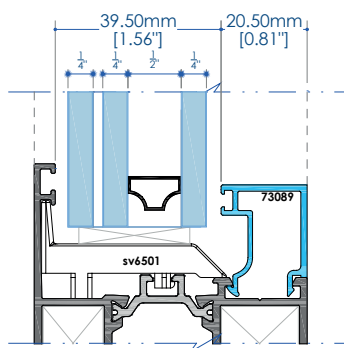


LAMINATED INSULATED

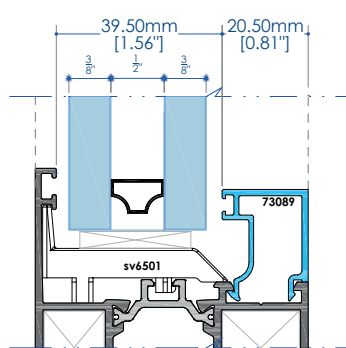


INSULATED

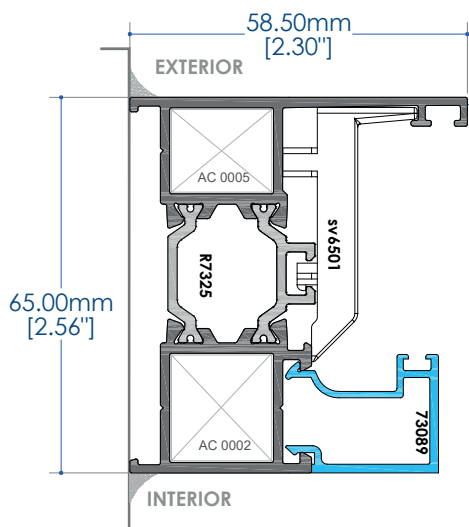

FIXED

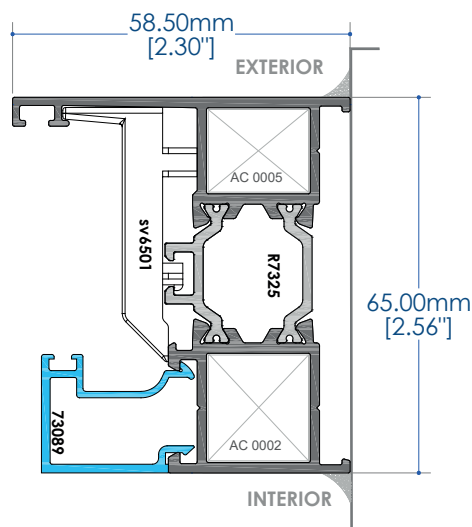

OPENING

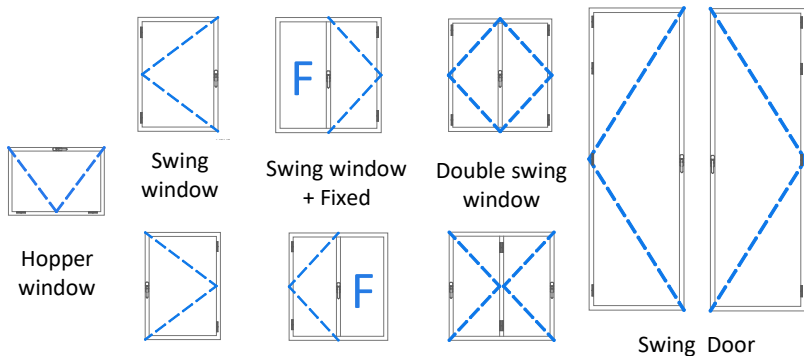

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO



INTER RPT 75i

THERMAL BREAK SERIES

INTER RPT 75i


Swing, hopper and fixed system, allows to manufacture doors and windows in different configurations.

Advantages

- Easy maintenance
- Maximun thermal and acustic isolation

Technical features

- Glass thickness:
 - Min. 1.36" – Max. 2.15"
- Window and door glass thickness :
 - Min. 1.75" – Max. 2.54"

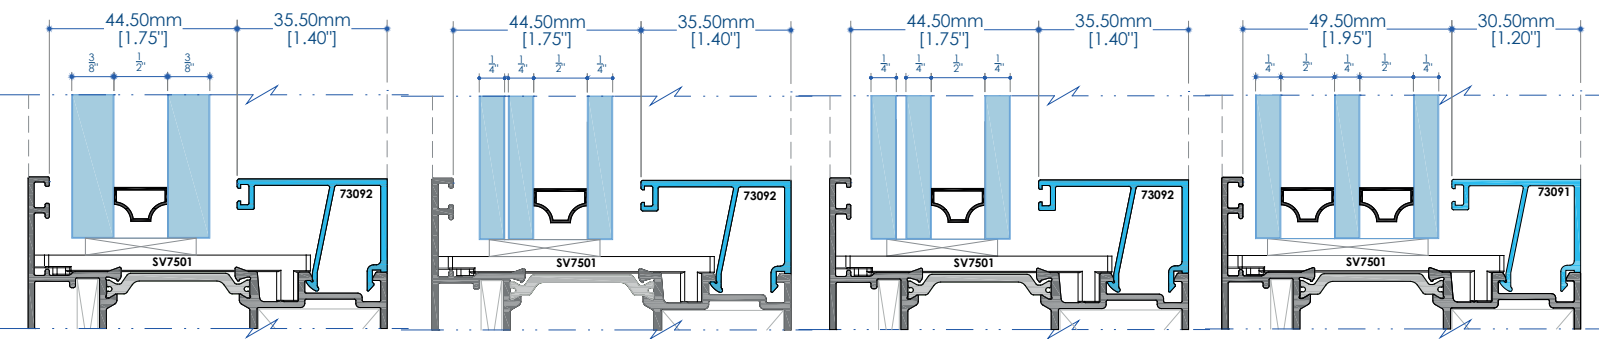


INSULATED

LAMINATED INSULATED

LAMINATED INSULATED


DOUBLE INSULATED

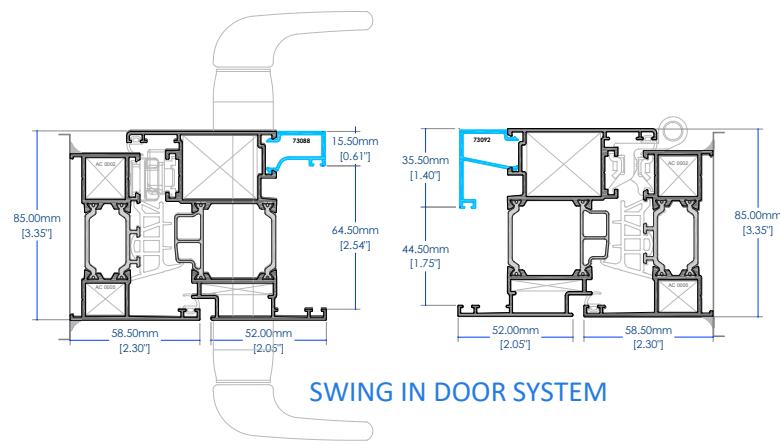

SWING IN DOOR SYSTEM

SWING IN WINDOW SYSTEM

OPENING

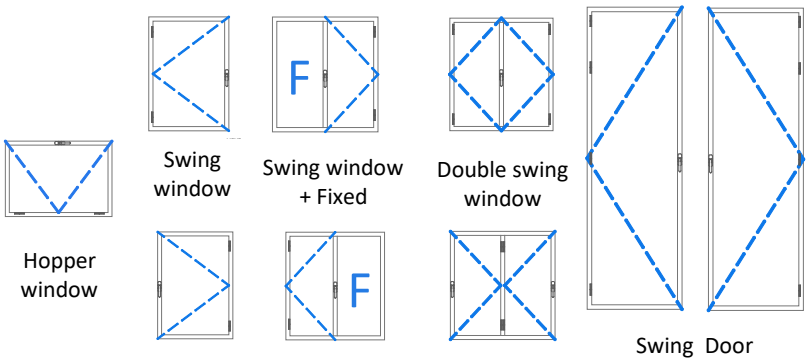

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.

INTER RPT 75i


Swing, hopper and fixed system, allows to manufacture doors and windows in different configurations.

Advantages

- Easy maintenance
- Maximun thermal and acustic isolation

Technical features

- Glass thickness:
 - Min. 1.36" – Max. 2.15"
- Window and door glass thickness :
 - Min. 1.75" – Max. 2.54"

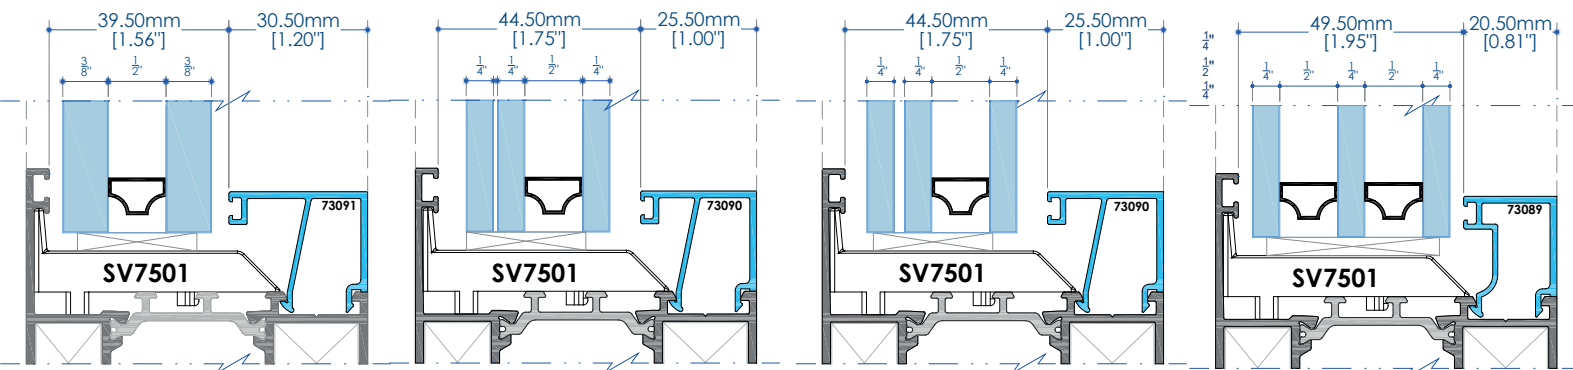


INSULATED

LAMINATED INSULATED


LAMINATED INSULATED

DOUBLE INSULATED

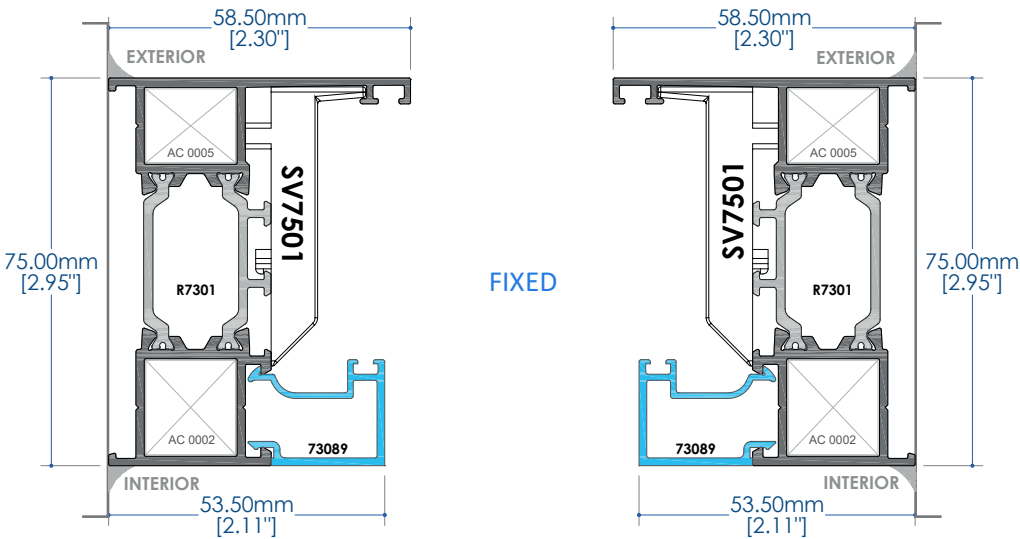

FIXED

OPENING

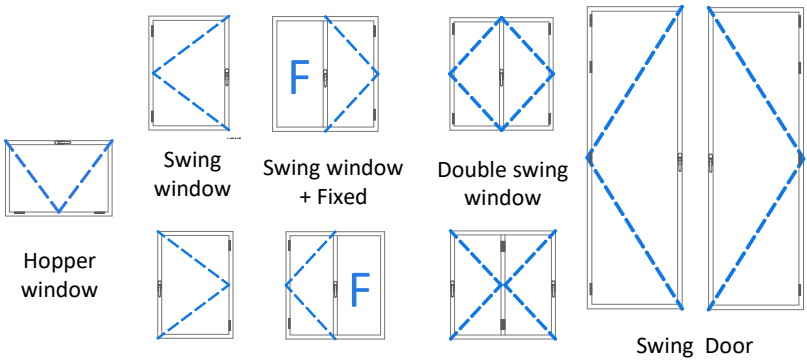

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special order per unit.



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO



INTER C95
RPT SLIDING WINDOW

INTER C95


European style sliding system, allows to manufacture windows and doors in different configurations.

Advantages


- Easy maintenance
- Maximum thermal and acoustic isolation

Technical features


- Maximum sash load 180kg
- Glass thickness:
 - Min. 0.56" – Max. 1.04"



INSULATED
LAMINATED




INSULATED




LAMINATED
* Special gaskets needed

Profiles for multitrack frames

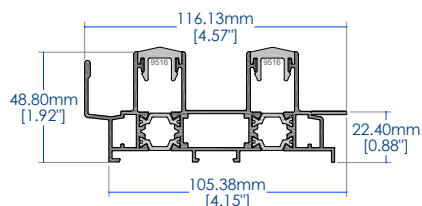


2 track frame

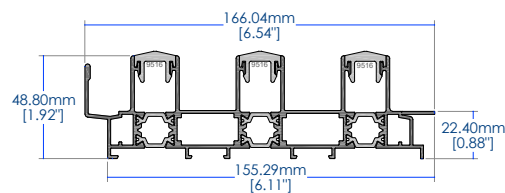


3 track frame


FRAME

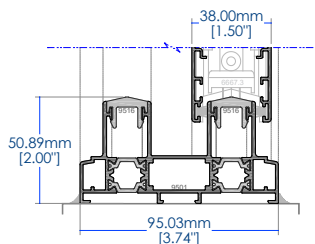


○ 2 track frame 3.74"

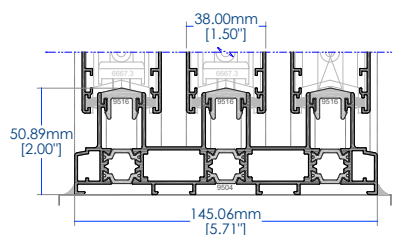

○ 3 track frame 5.71"

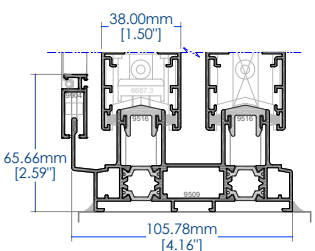

○ 2 track frame with
mosquito screen 4.16"

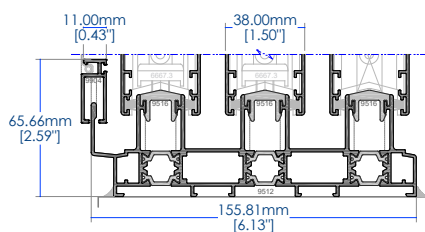

○ 3 track frame with mosquito
screen 6.13"

COLORS

In stock



White






Bronze



Black

Custom colors and finishes require a special order per unit.

OPENING

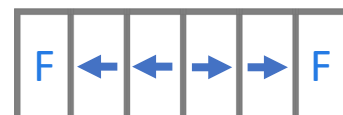



INTERALUM

SOLUCIONES INTEGRALES
DE ALUMINIO



INTER C115
RPT SLIDING DOOR

INTER C115


European style sliding system, allows to manufacture doors in different configurations.

Advantages


- Easy maintenance
- Maximum thermal and acoustic isolation

Technical features


- Maximum sash load 300kg
- Glass thickness:
 - Min. 0.97" – Max. 1.42"

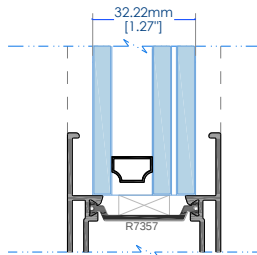

INSULATED
LAMINATED

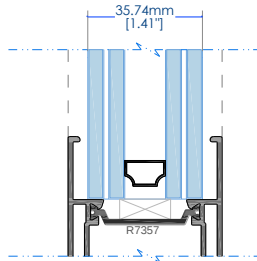


DOUBLE LAMINATED
INSULATED

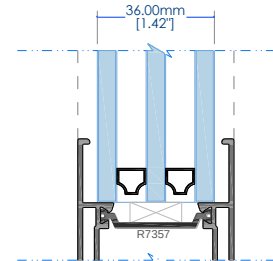


INSULATED

Profiles for
multitrack frames

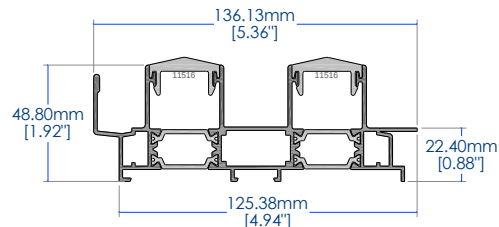


2 track frame

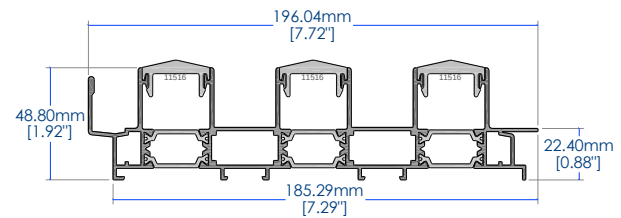


3 track frame


FRAME

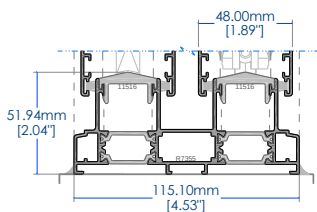


○ 2 track frame 4.53"

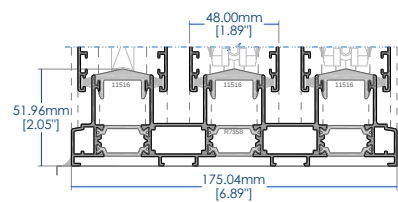

○ 3 track frame 6.89"

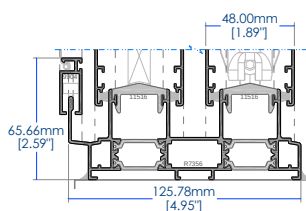


○ 2 track frame with
mosquito screen 4.95"

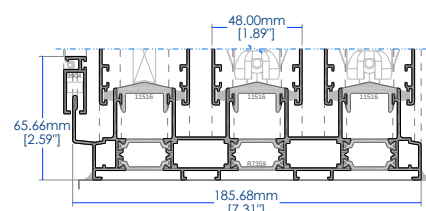

○ 3 track frame with
mosquito screen 7.31"

OPENING

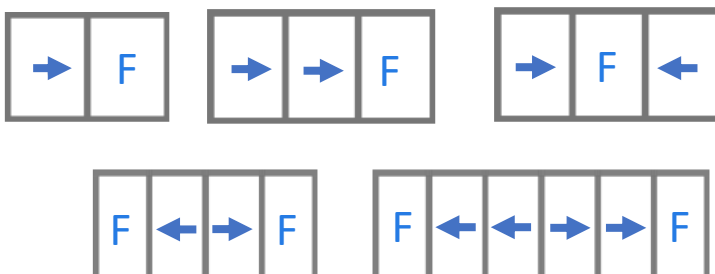

COLORS

In stock



White



Bronze



Black

Custom colors and finishes require a special
order per unit.