

2025 Products

Index

Concealed - LED Strips

LED Strip RGBTW	13
LED Strip Low Output	15
LED Strip High Efficiency	17
LED Strip Ultra High Efficiency	19
LED Strip High Efficiency IP67	21
LED Strip Full Spectrum	23
LED Strip High Output	25
LED Strip RGBW 2700K	27
LED Strip RGBW 3000K IP65	29
LED Strip Tunable White 2700-6500K	31
LED Strip COB RGB	33
LED Strip COB	35
LED Strip CSP RGBW	37
LED Strip Single Color IP68	39
LED Strip RGBW IP68	41

Concealed - DiGi LED Strips

DiGi LED Strip RGBTW	45
DiGi LED Strip RGB 16mm 24V	47
DiGi LED Strip RGB 16mm 12V	49
DiGi LED Strip RGB 24mm 12V	51
DiGi LED Strip RGB 38mm 12V	53
DiGi LED Strip RGB 83mm 24V	55
DiGi LED Strip RGBW 100mm 24V	57
DiGi LED Strip Amber Drift 16mm 12V	59
DiGi LED Strip 3000K IP68	63
DiGi LED Strip RGBW IP68	65

Concealed - Panels

DiGi FlexSheet	67
DiGi Evenlight Panel	69

Channel

Aluminum Profile High	73
Aluminum Profile Low	75
LED Profile H High	77
Aluminum Profile Half Round	79
Aluminum Profile 3535	81
Aluminum Profile Corner	83
Aluminum Profile Mini	85
Aluminum Profile Plaster	87

Direct View - DiGi Linears

DiGi Linear D-Serie	91
DiGi Linear E-Serie	93
DiGi Linear V-Serie	95

Direct View - Dots

DiGi Module XT3	99
DiGi Module XT6	101
DiGi Module E3S/E6S/E12S	103
DiGi Mesh	105

Direct View - Neonflex

Neonflex Side Bend	109
Neonflex Top Bend	111
DiGi Neonflex Side Bend	113
DiGi Neonflex Top Bend	115

Projectors & Linears - Linears

Linear Soft Line	119
Linear Window	121
Linear Flex	123
Linear G18	125
Linear G24	127
Linear G36	129
Linear G54	131
Linear G100	133
Linear Inground	135
Linear Inground Flex	137
Linear Flex Silicon	139
DiGi Linear Flex Silicon	141

Projectors & Linears - Beams

Beam F12	145
Beam F36	147
Beam F54	149
Beam F72	151
Beam F120	153
Beam F250	155

About Us

We are OneEightyOne



Nice to meet you!

OneEightyOne is a dynamic LED lighting company. We dare to say that we are one of the most creative, capable and reliable partners in the industry.

It is our mission to push the boundaries of what lighting can do. With our creative customizations, plug & play solutions and our extensive range of smart LED products, we always offer a unique light experience.

The name 'OneEightyOne' honors the elusive light colour 181 which Stefan used at parties. Ironically, this blue-purple is one of the hardest colors to create using LED light...



Stefan Verhoef

Founder, Chief of Innovation

CIO Stefan Verhoef was 11 years old when he started to boost birthday parties and school events with his 'disco set'. As a teenager, Stefan pumped up beach parties and other festivities with more advanced sound and light systems.

Around 2005, when LED light appeared on the scene, he immediately saw the infinite possibilities and opportunities. He started combining LED with the operating systems he had already developed himself, lifting LED lighting to a new level.

Stefan technically executed the light designs for the hottest clubs, like Sinners and Club Air. He took the night and light experience beyond expectations. Lighting projects for offices and retail outlets followed soon. Before he knew it, Stefan was leading his new company. A magnet for smart lighting fanatics who wanted to work in the front line of LED lighting.

OneEightyOne is based in Amsterdam, but also holds offices in Dubai and Hong Kong.



Value Added Services

Pre Order	After Confirmation	After Delivery	Project Support
✓ Renders ✓ Solution design ✓ Detailed product info	✓ Site inspection ✓ Engineering ✓ Wire plans ✓ Pre assembly ✓ System configuration ✓ Providing mockup ✓ Bi weekly update meeting ✓ Project supervision	✓ Support on site ✓ Programming ✓ Testing & commissioning ✓ Content ✓ Maintenance plans	

Facts

Markets

- ✓ Architectural
- ✓ Entertainment
- ✓ Hospitality
- ✓ Offices
- ✓ Retail

Focus

- ✓ Dynamic Lighting
- ✓ Facade Lighting
- ✓ Controls
- ✓ Custom Projects



Established

- ✓ 2005

Offices

- ✓ Amsterdam
- ✓ Dubai
- ✓ Hong Kong

Employees


- ✓ 50+ Highly passionate light minded people.
- ✓ Experienced sales engineers, developers, assembly and other staff members




Lightly obsessed
with light

Product Info

All our products come with detailed product information. Scan the QR tags on the product pages, it will direct you to the product page on our website where you find all datasheets. After login you can download further documentation like wire plans and many more!

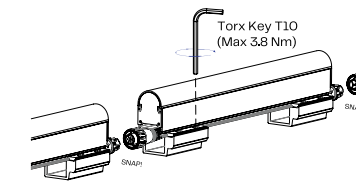


For waterproof connection make sure that the last fixture has the end-cap connector fixed to the last output connector



When the fixture is installed and cables are connected between the fixtures the cable guide can be placed to make sure the cable will not make any unnecessary movement



Minimum of 4 mm and maximum of 10 mm spacing between fixtures to allow thermal expansion

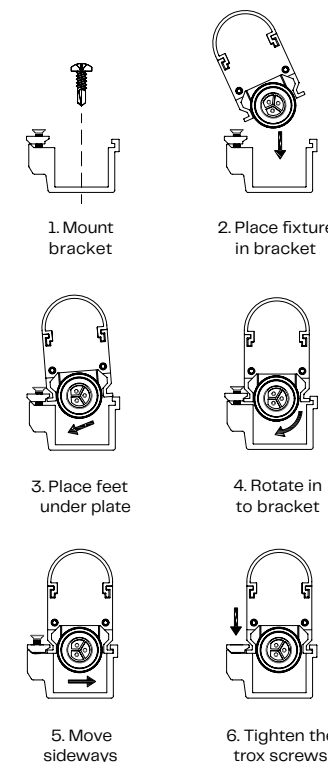


With our creative customizations, easily applicable plug & play solutions and our extensive range of selected and self-developed smart LED products, we always offer a unique light experience!

181 oneeighty
one.com

131

Concealed

10

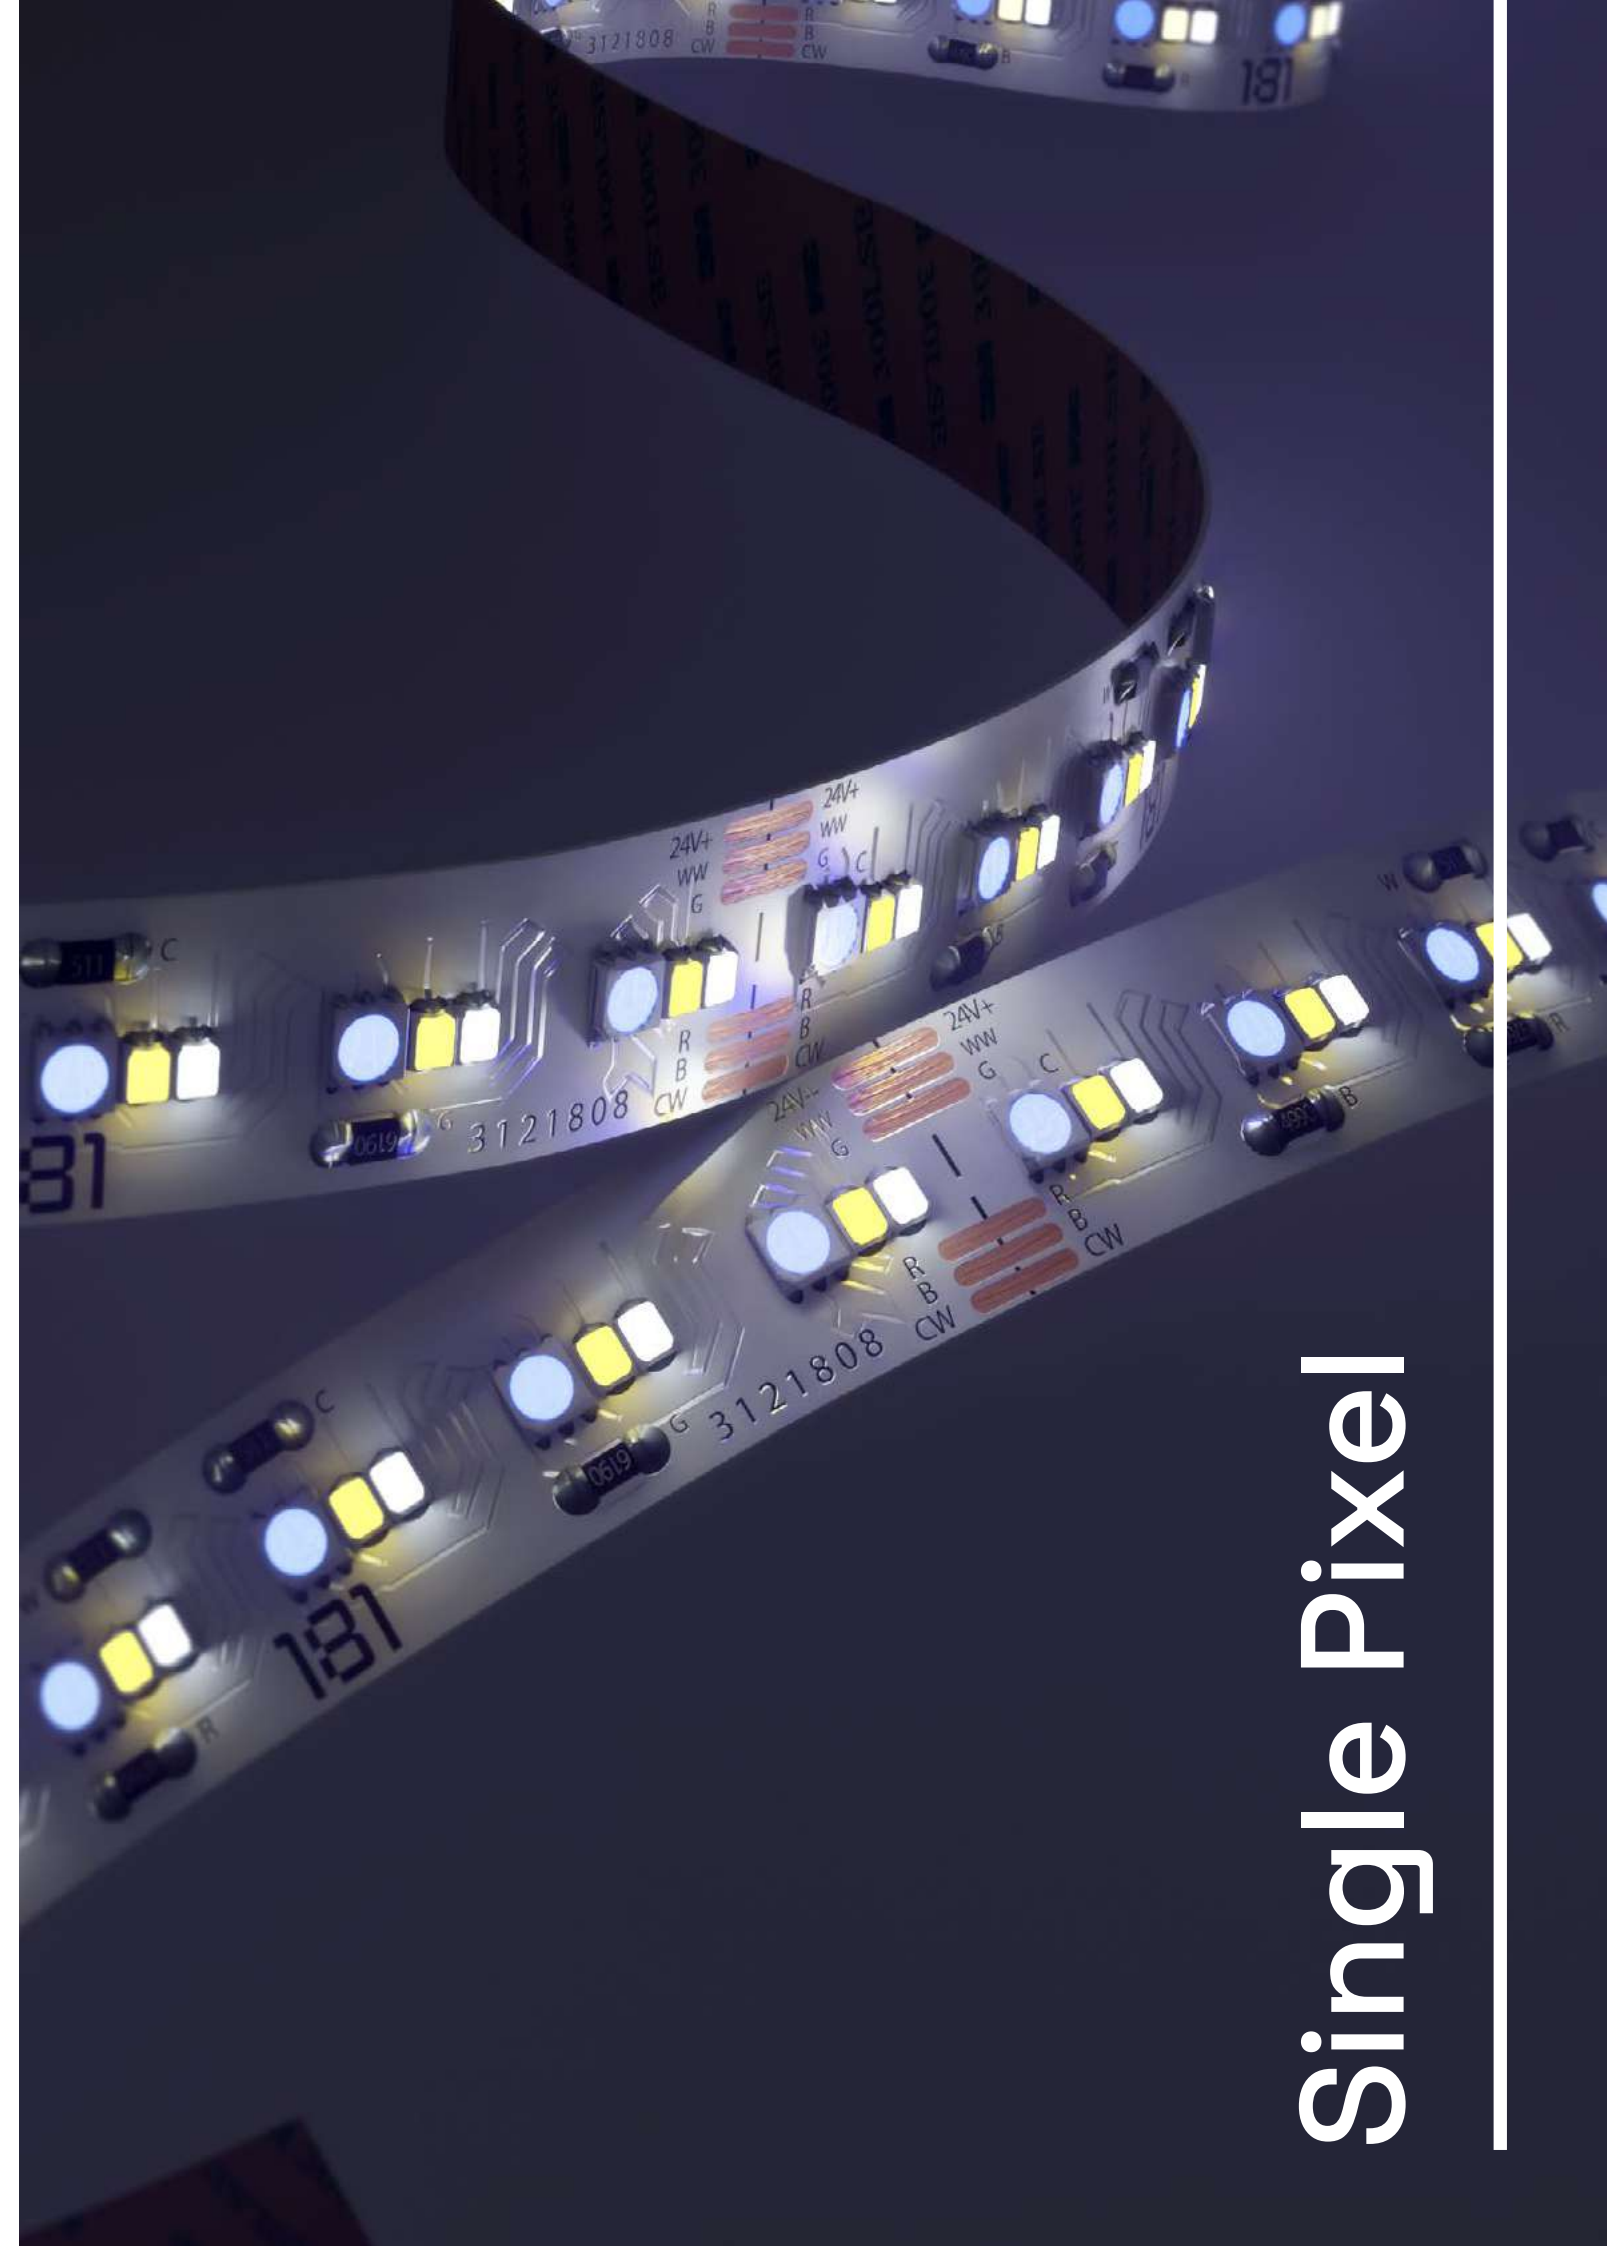

Single Pixel



181



Scan for full info

LED Strip RGBTW


Key Specs

Power Consumption (W/m)	24
LED Quantity (per meter)	96 + 192
Cutting Interval (mm)	62.5
Lumen Output (lm/m)	1.416

Color Range



Beam Angle



Specifications

PWM

IP20


24V
DC

CE


RoHS

Temp
-25 - +60°C

Dimensions (in mm)

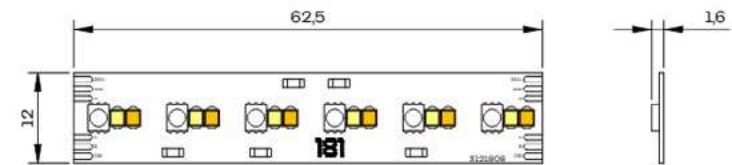

Related Items More available



Profiles

➤ Aluminum LED Profile Half Round

➤ Aluminum LED Profile High

➤ Aluminum LED Profile Low



LTECH Driver

➤ LED Driver DALI 24V

➤ LED Driver DMX 24V



Meanwell Power Supply

➤ XLG-75-24


➤ XLG-100-24

➤ HLG-150-24



Flexible Rubber LED Cable 6-cores

➤ LED Cable

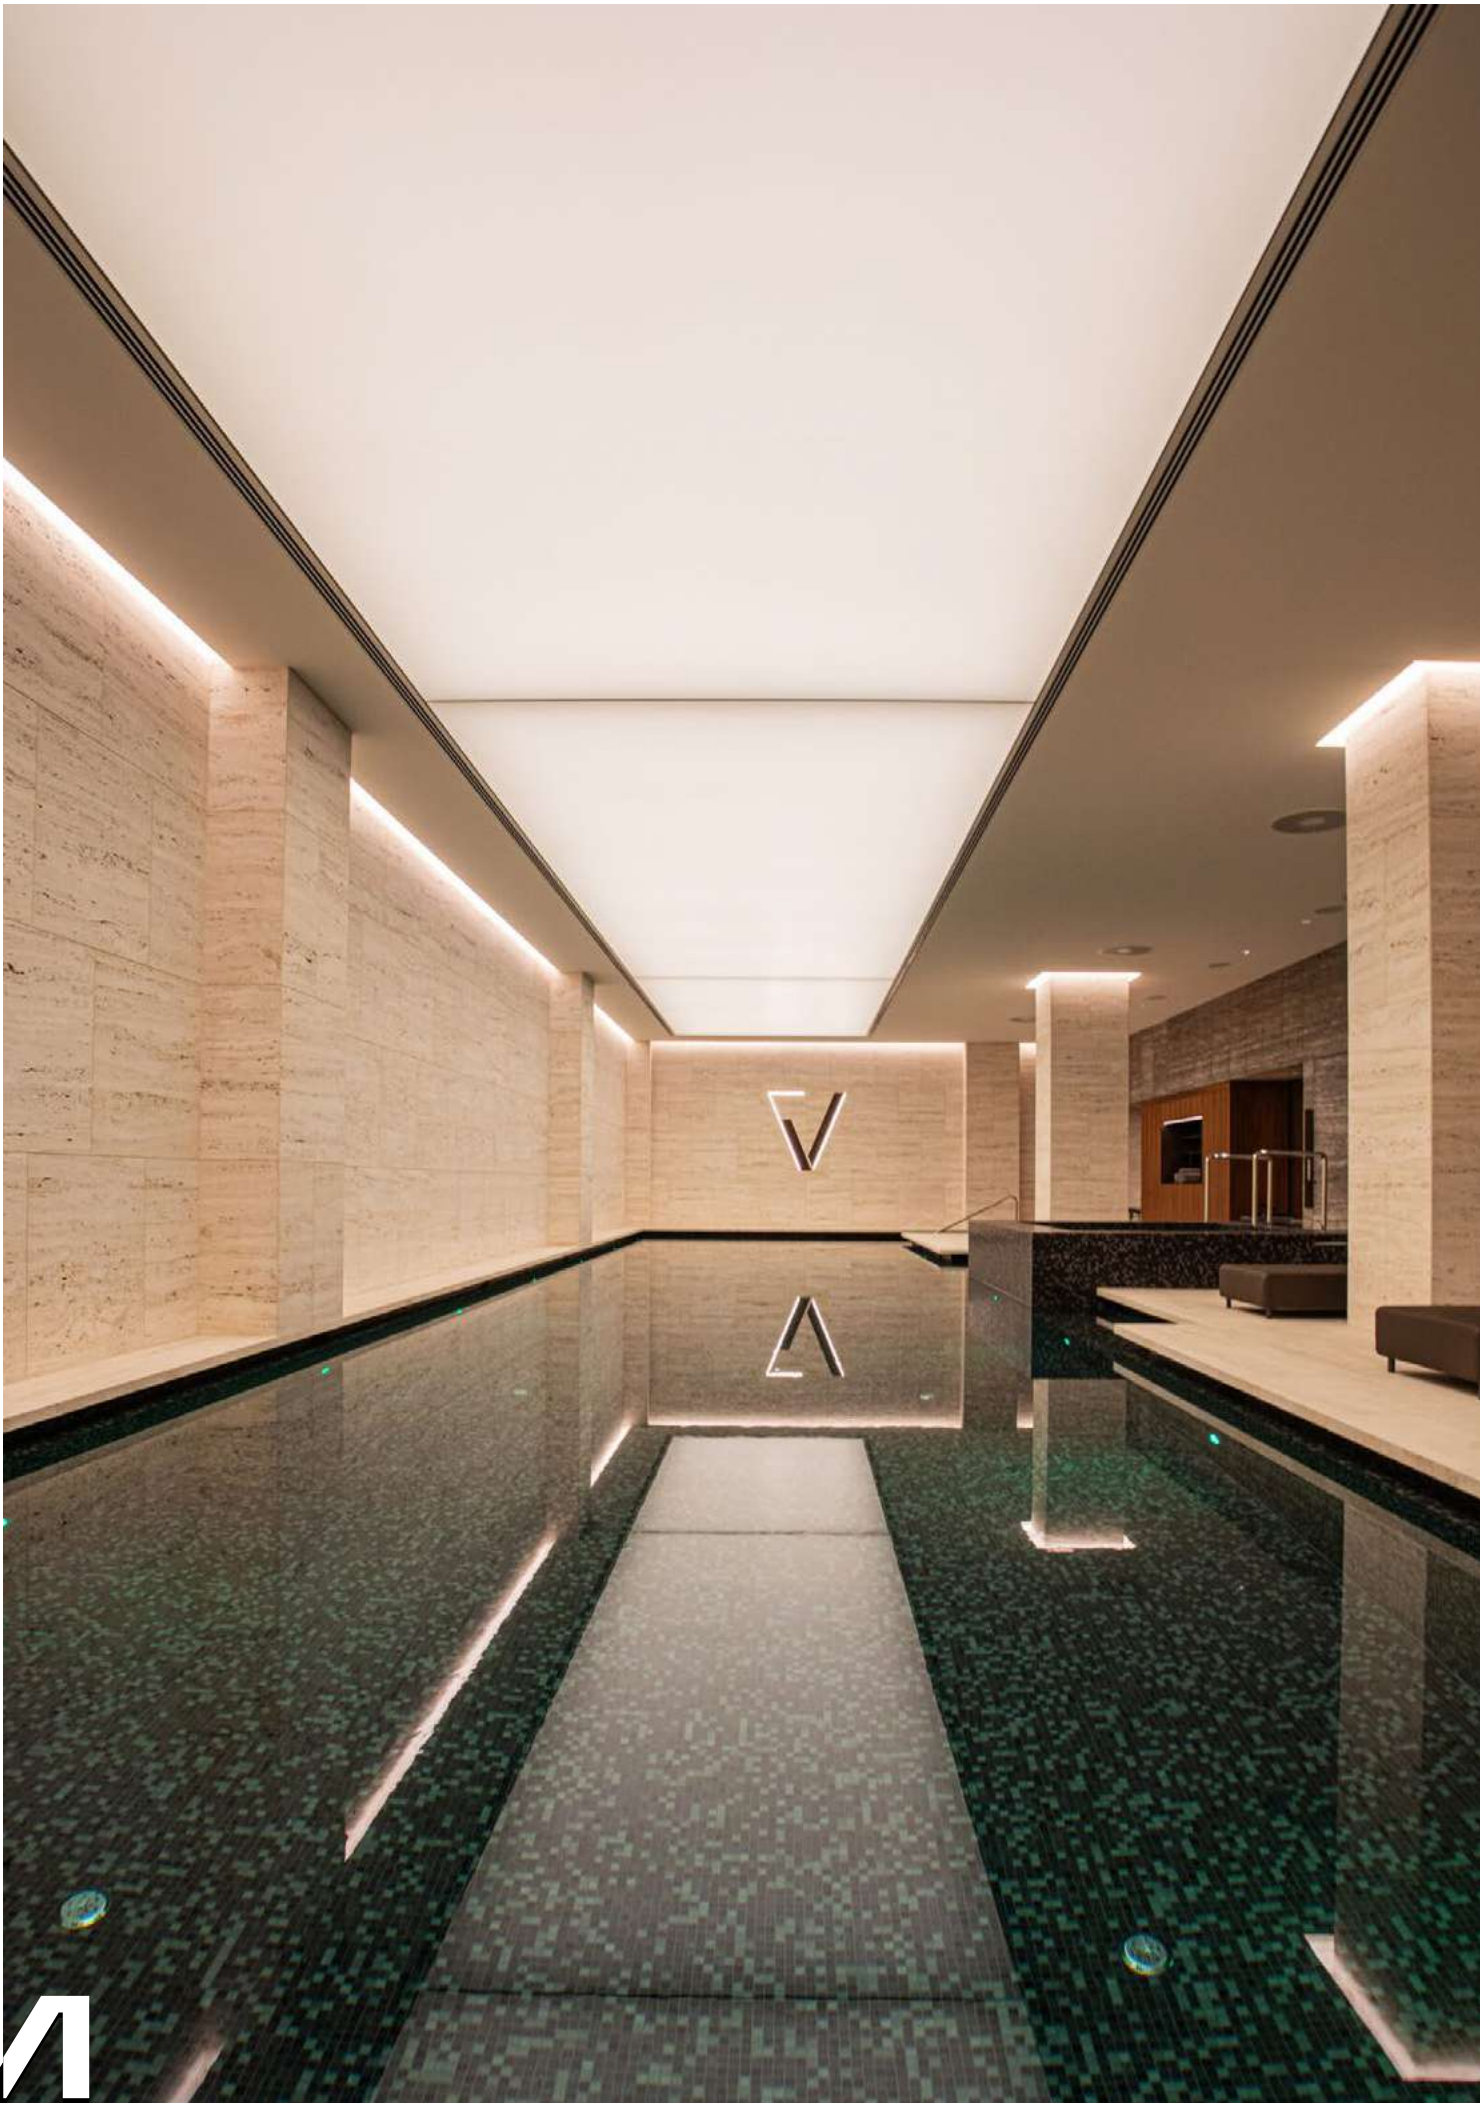


181


LED Strip Low Output

Key Specs	2700K	4000K
Power Consumption (W/m)	4,8	4,8
LED quantity (per meter)	70	70
Cutting interval (mm)	100	100
Luminous efficacy (lm/W)	100	110


Color Range




Beam Angle



Specifications



Dimensions (in mm)

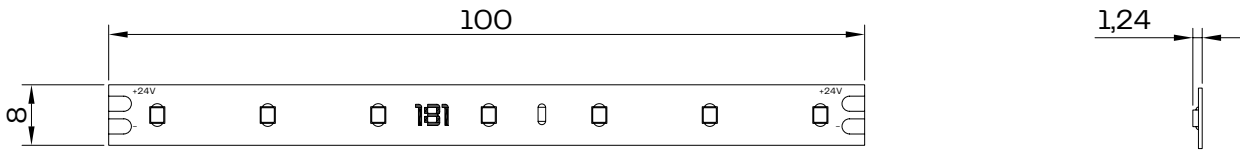

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver 0-10V
- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



181



Scan for full info

LED Strip High Efficiency


Key Specs	2700K	3000K	4000K	6500K
Power Consumption (W/m)	9,6	9,6	9,6	9,6
LED quantity (per meter)	160	160	160	160
Cutting interval (mm)	50	50	50	50
Luminous efficacy (lm/W)	150	150	160	170




Color Range




Beam Angle




Specifications



Dimensions (in mm)

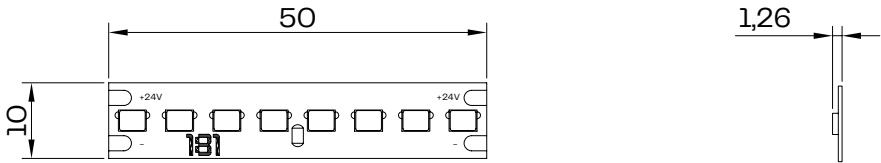

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



181




Scan for full info

LED Strip Ultra High Efficiency


Key Specs	3000K	4000K
Power Consumption (W/m)	9,6	9,6
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Luminous efficacy (lm/W)	150	160




Color Range




Beam Angle




Specifications



Dimensions (in mm)

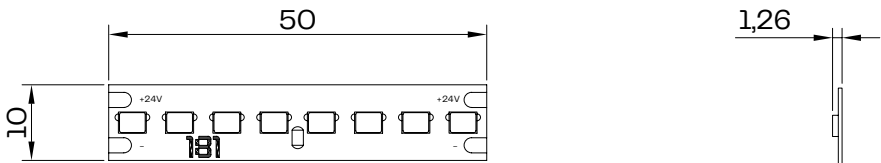

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver 0-10V
- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



181




Scan for full info

LED Strip High Efficiency IP67


Key Specs	3000K	4000K
Power Consumption (W/m)	9,6	9,6
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Luminous efficacy (lm/W)	150	160




Color Range




Beam Angle



Specifications



Dimensions (in mm)

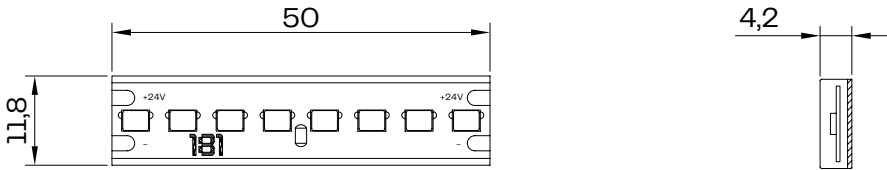

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver 0-10V
- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



181



Scan for full info

LED Strip Full Spectrum

Key Specs


Power Consumption (W/m)	9,6	19,2
LED quantity (per meter)	160	160
Cutting interval (mm)	50	50
Luminous efficacy (lm/W)	120	110
CRI	≥95	≥95



Color Range



Beam Angle



Specifications

PWM

IP20


24V
DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

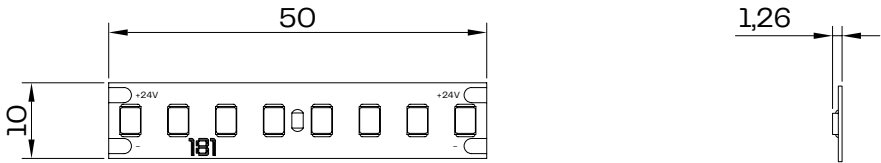

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver 0-10V
- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



181


LED Strip High Output
Key Specs

Power Consumption (W/m)	14,4
LED quantity (per meter)	160
Cutting interval (mm)	50
Luminous efficacy (lm/W)	138

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

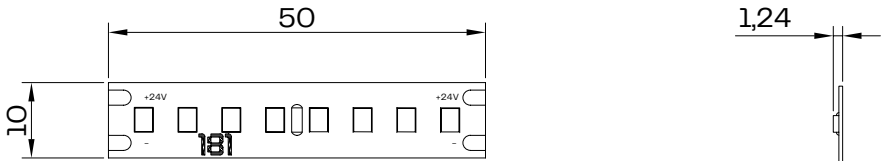

Related Items More available

Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low

LTECH Driver

- LED Driver 0-10V
- LED Driver DALI 24V
- LED Driver DMX 24V

Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24


Flexible Rubber LED Cable 2-cores

- LED Cable 2x0.5mm2



Scan for full info



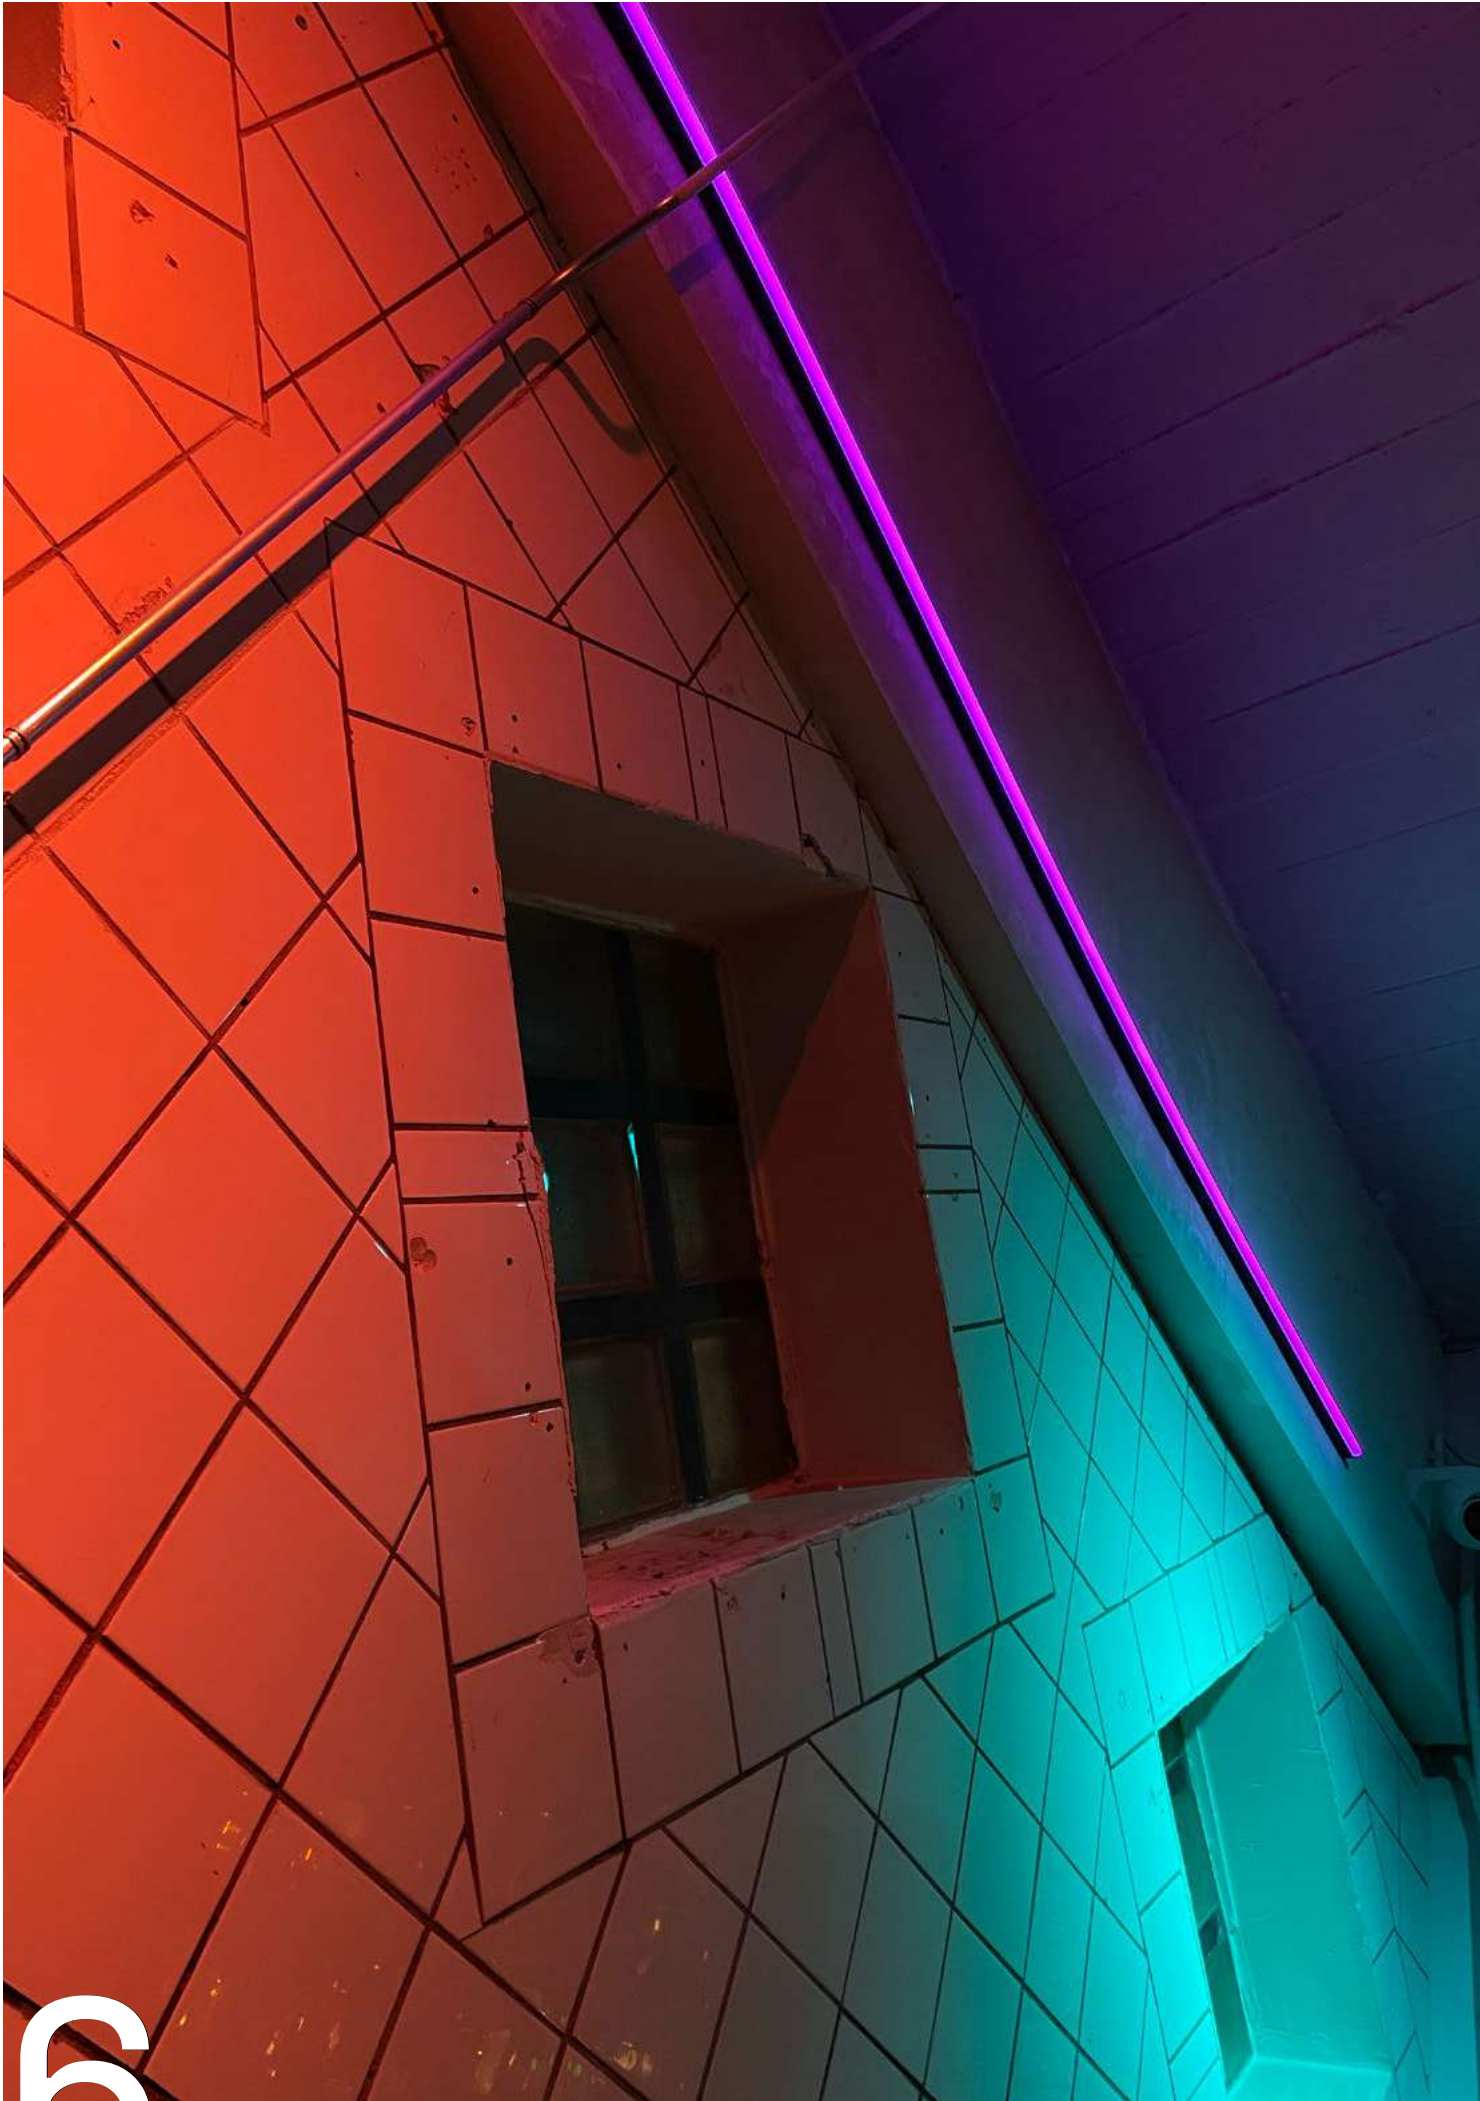

181



Scan for full info

LED Strip RGBW 2700K

Key Specs


Power Consumption (W/m)	19,2
LED quantity (per meter)	70
Cutting interval (mm)	100
Luminous efficacy (lm/W)	62



Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE


RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

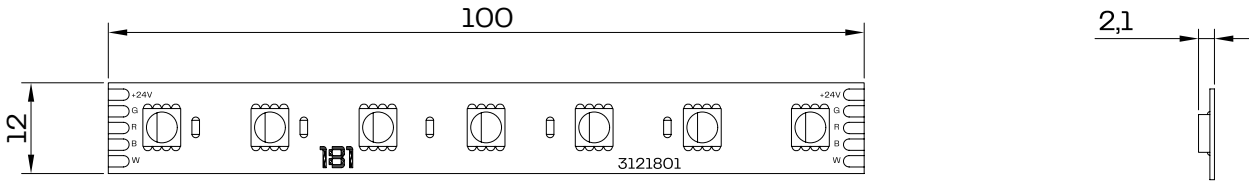

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181



Scan for full info

LED Strip RGBW 3000K IP67


Key Specs

Power Consumption (W/m)	19,2
LED quantity (per meter)	70
Cutting interval (mm)	100
Luminous efficacy (lm/W)	60

Color Range



Beam Angle



Specifications

PWM

IP65


24V DC

CE


RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

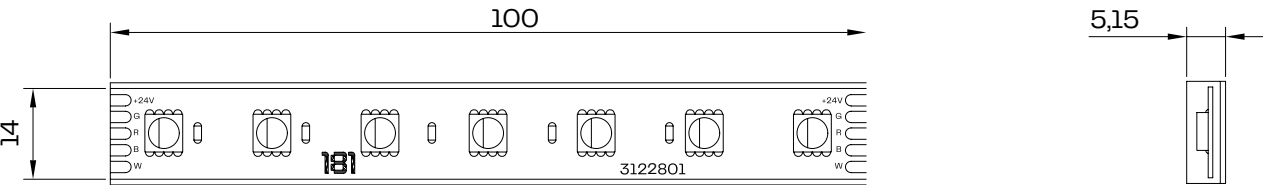

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



LTECH Driver

- LED Driver DALI 24V
- LED Driver DMX 24V



Meanwell Power Supply

- XLG-75-24
- XLG-100-24
- HLG-150-24



SpagLEDti

- LED Cable Beige
- LED Cable Black



181

LED Strip Tunable White


Key Specs

Power Consumption (W/m)	19,2
LED quantity (per meter)	240
Cutting interval (mm)	100
Luminous efficacy (lm/W)	84

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

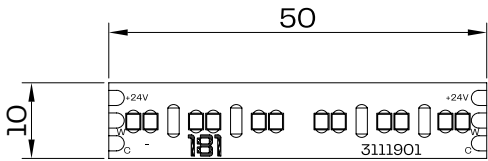

Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



Drivers

- LM 100 24 G2M2
- LM 100 24 G2D2
- LM 100 24 G2A2



Meanwell Power Supply

- HLG 240 24
- HLG 320 24
- RSP 200 24



Controller

- EX2 DMX/RF CT Controller





181

LED Strip COB RGB


Key Specs

Power Consumption (W/m)	15
LED quantity (per meter)	1134
Cutting interval (mm)	55,4

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 ~ +55°C

Dimensions (in mm)

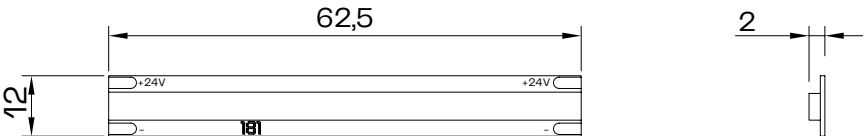

Related Items More available

Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low

DMX Controller

- DIN 4x4 DIN DMX 4CH

Driver

- Waterproof High Voltage LED Decoder DMX/RDM 3x1.2A


Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



Scan for full info



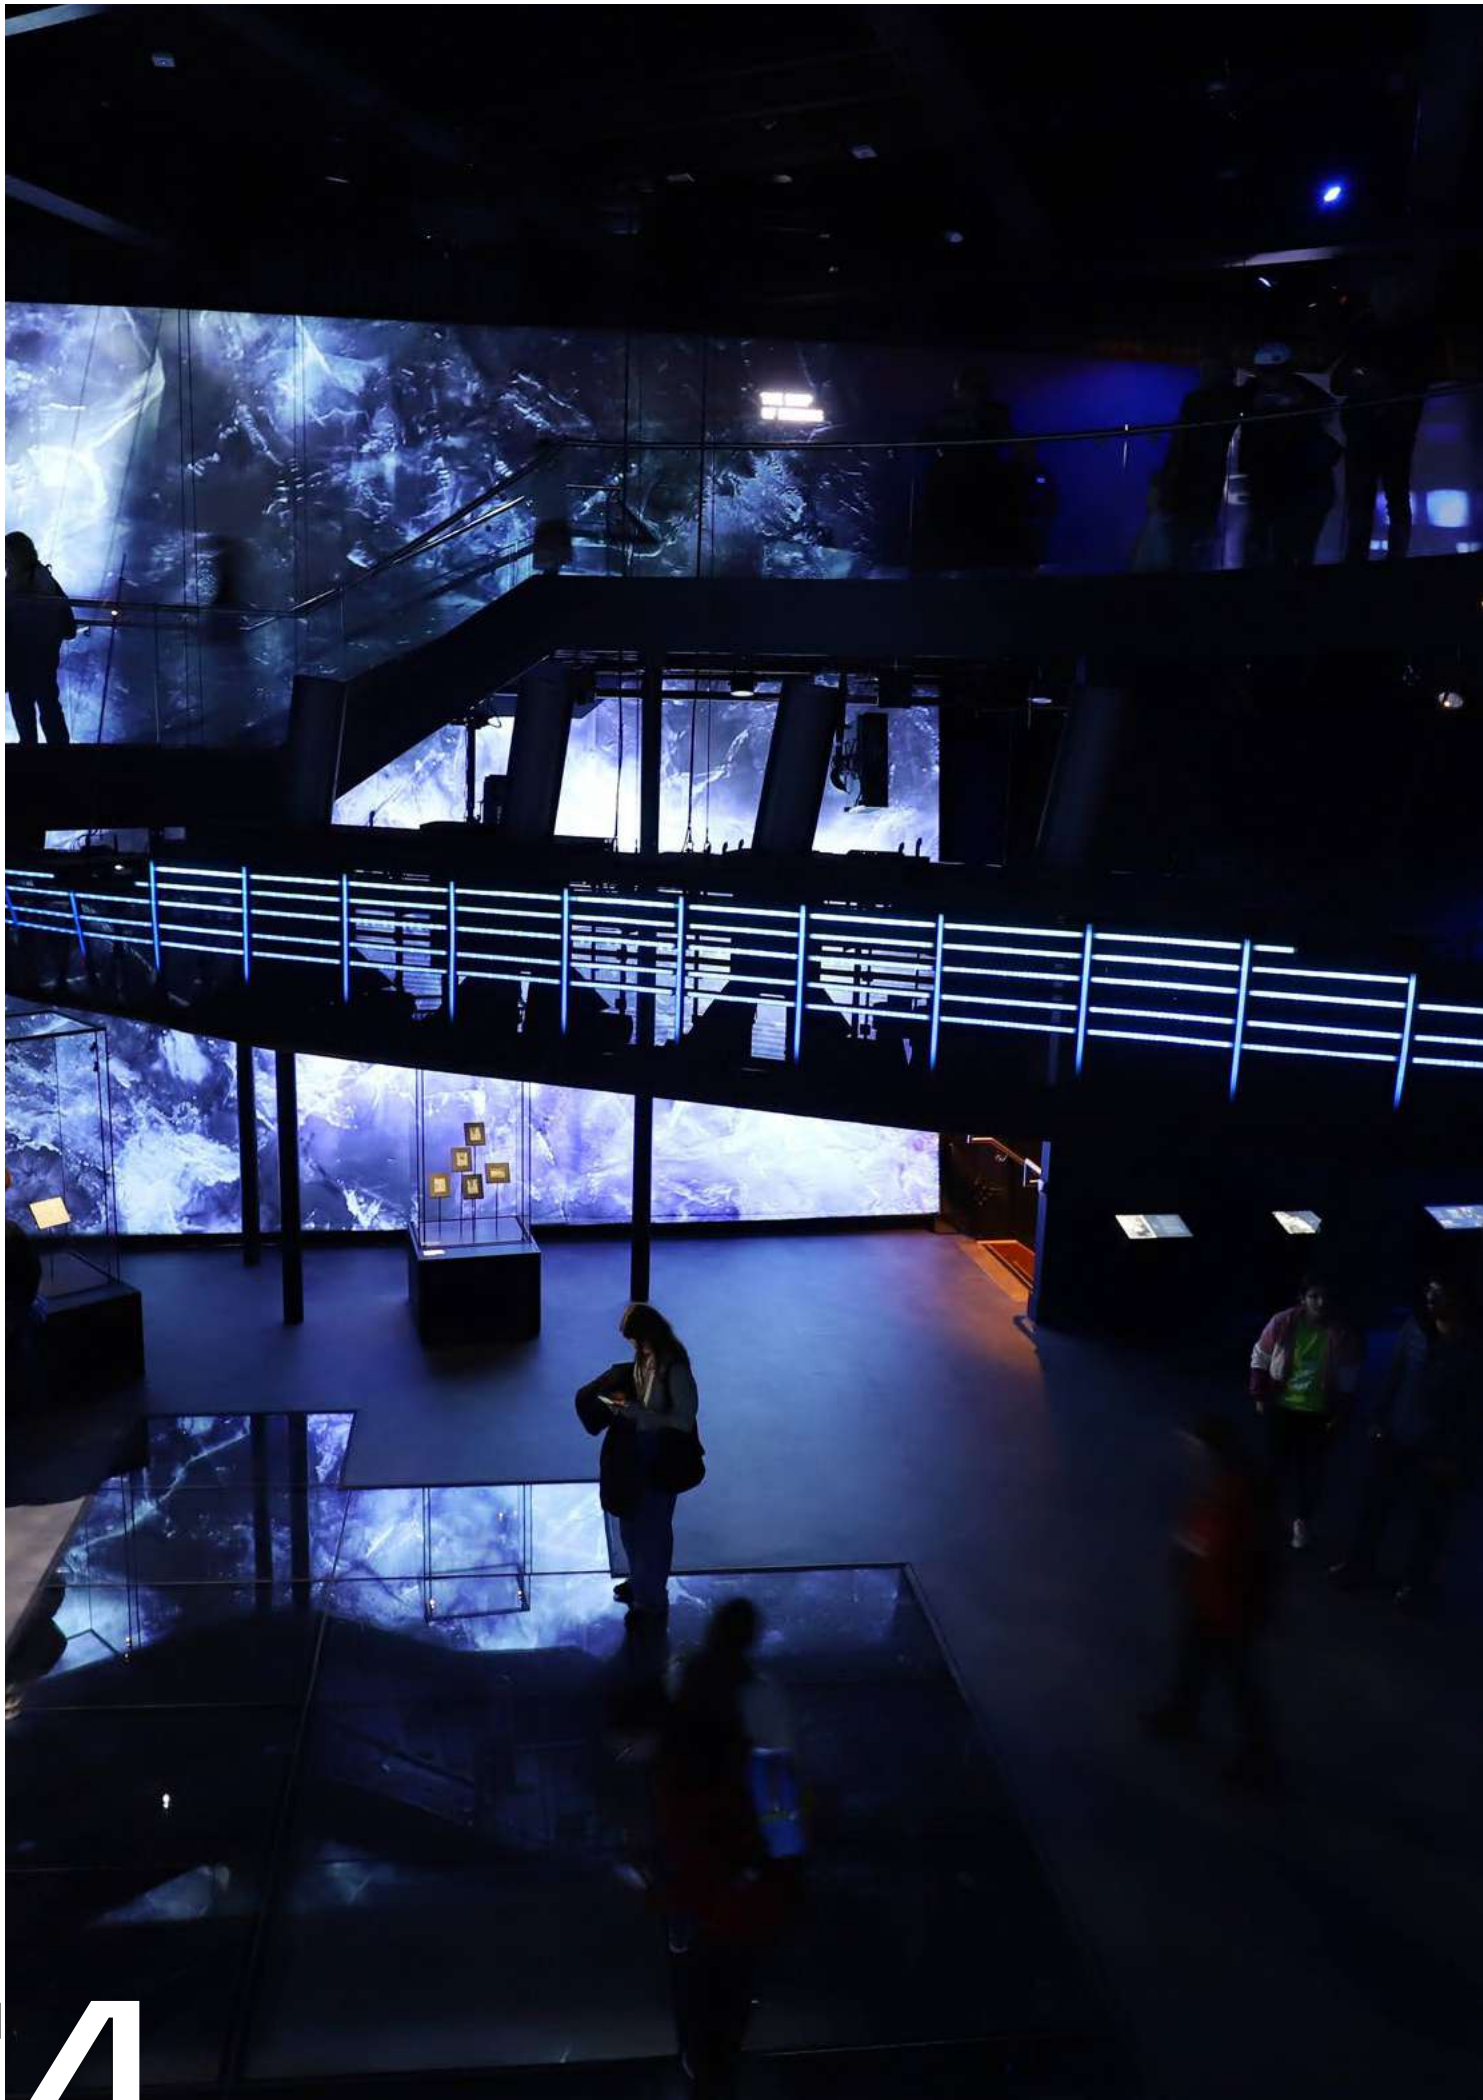

181



Scan for full info


LED Strip COB

Key Specs	3000K	4000K	6500K
Power Consumption (W/m)	11	11	11
LED quantity (per meter)	512	512	512
Cutting interval (mm)	62,5	62,5	62,5
Luminous efficacy (lm/W)	85	95	95
Output efficacy	950		


Color Range



Beam Angle



Specifications



Dimensions (In mm)



Related Items More available



Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low



COB Connector

- Input
- Extension



Driver

- LM 75 24 G1T2



Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip CSP RGBW


Key Specs

Power Consumption (W/m)	20
LED quantity (per meter)	840
Cutting interval (mm)	33.3
Luminous efficacy (lm/W)	43

Color Range



Beam Angle



Specifications

PWM

IP20


24V DC

CE

RoHS

Temp
-5 - +55°C

Dimensions (in mm)

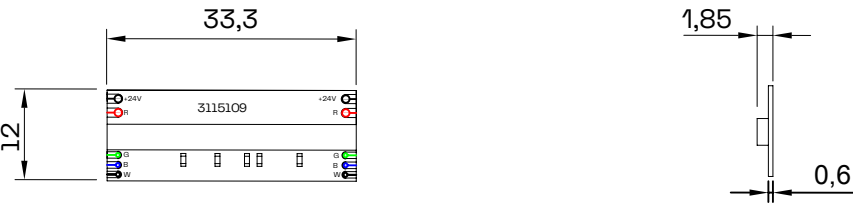

Related Items More available

Profiles

- Aluminum LED Profile Half Round
- Aluminum LED Profile High
- Aluminum LED Profile Low

DMX Controller

- LT-820-5A

Driver

- Dali 4x5A

Power Supplies

- Meanwell HLG 240 24
- Meanwell HLG 320 24
- Meanwell RSP 200 24



181



Scan for full info

LED Strip Single Color IP68

Key Specs


Power Consumption (W/m)	10
LED quantity (per meter)	120
Cutting interval (mm)	100




Color Range




Specifications

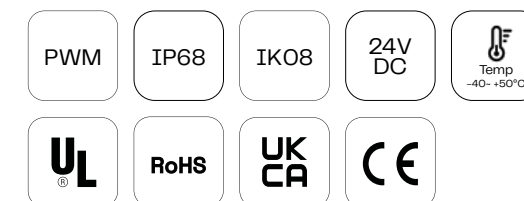


Beam Angle



Dimensions (in mm)



Related Items More available




Mounting

- Profile Straight
- Profile Curve
- Mounting clip




Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 36 24 G1A2
- LM 36 12 G1D2
- LM 36 24 F1P1



Profile Cover

- 3535



181



Scan for full info

LED Strip RGBW IP68

Key Specs


Power Consumption (W/m)	17
LED quantity (per meter)	60
Cutting interval (mm)	90
Output of efficacy	758lm/m - rgbw3000K



Color Range




Beam Angle




Specifications



Dimensions (In mm)



Related Items More available




Mounting

- Profile Straight
- Profile Curve
- Mounting clip



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- Waterproof LED Decoder DMX/RDM 4x5A



Profile Cover

- 3535


131

Concealed

42



Multi Pixel

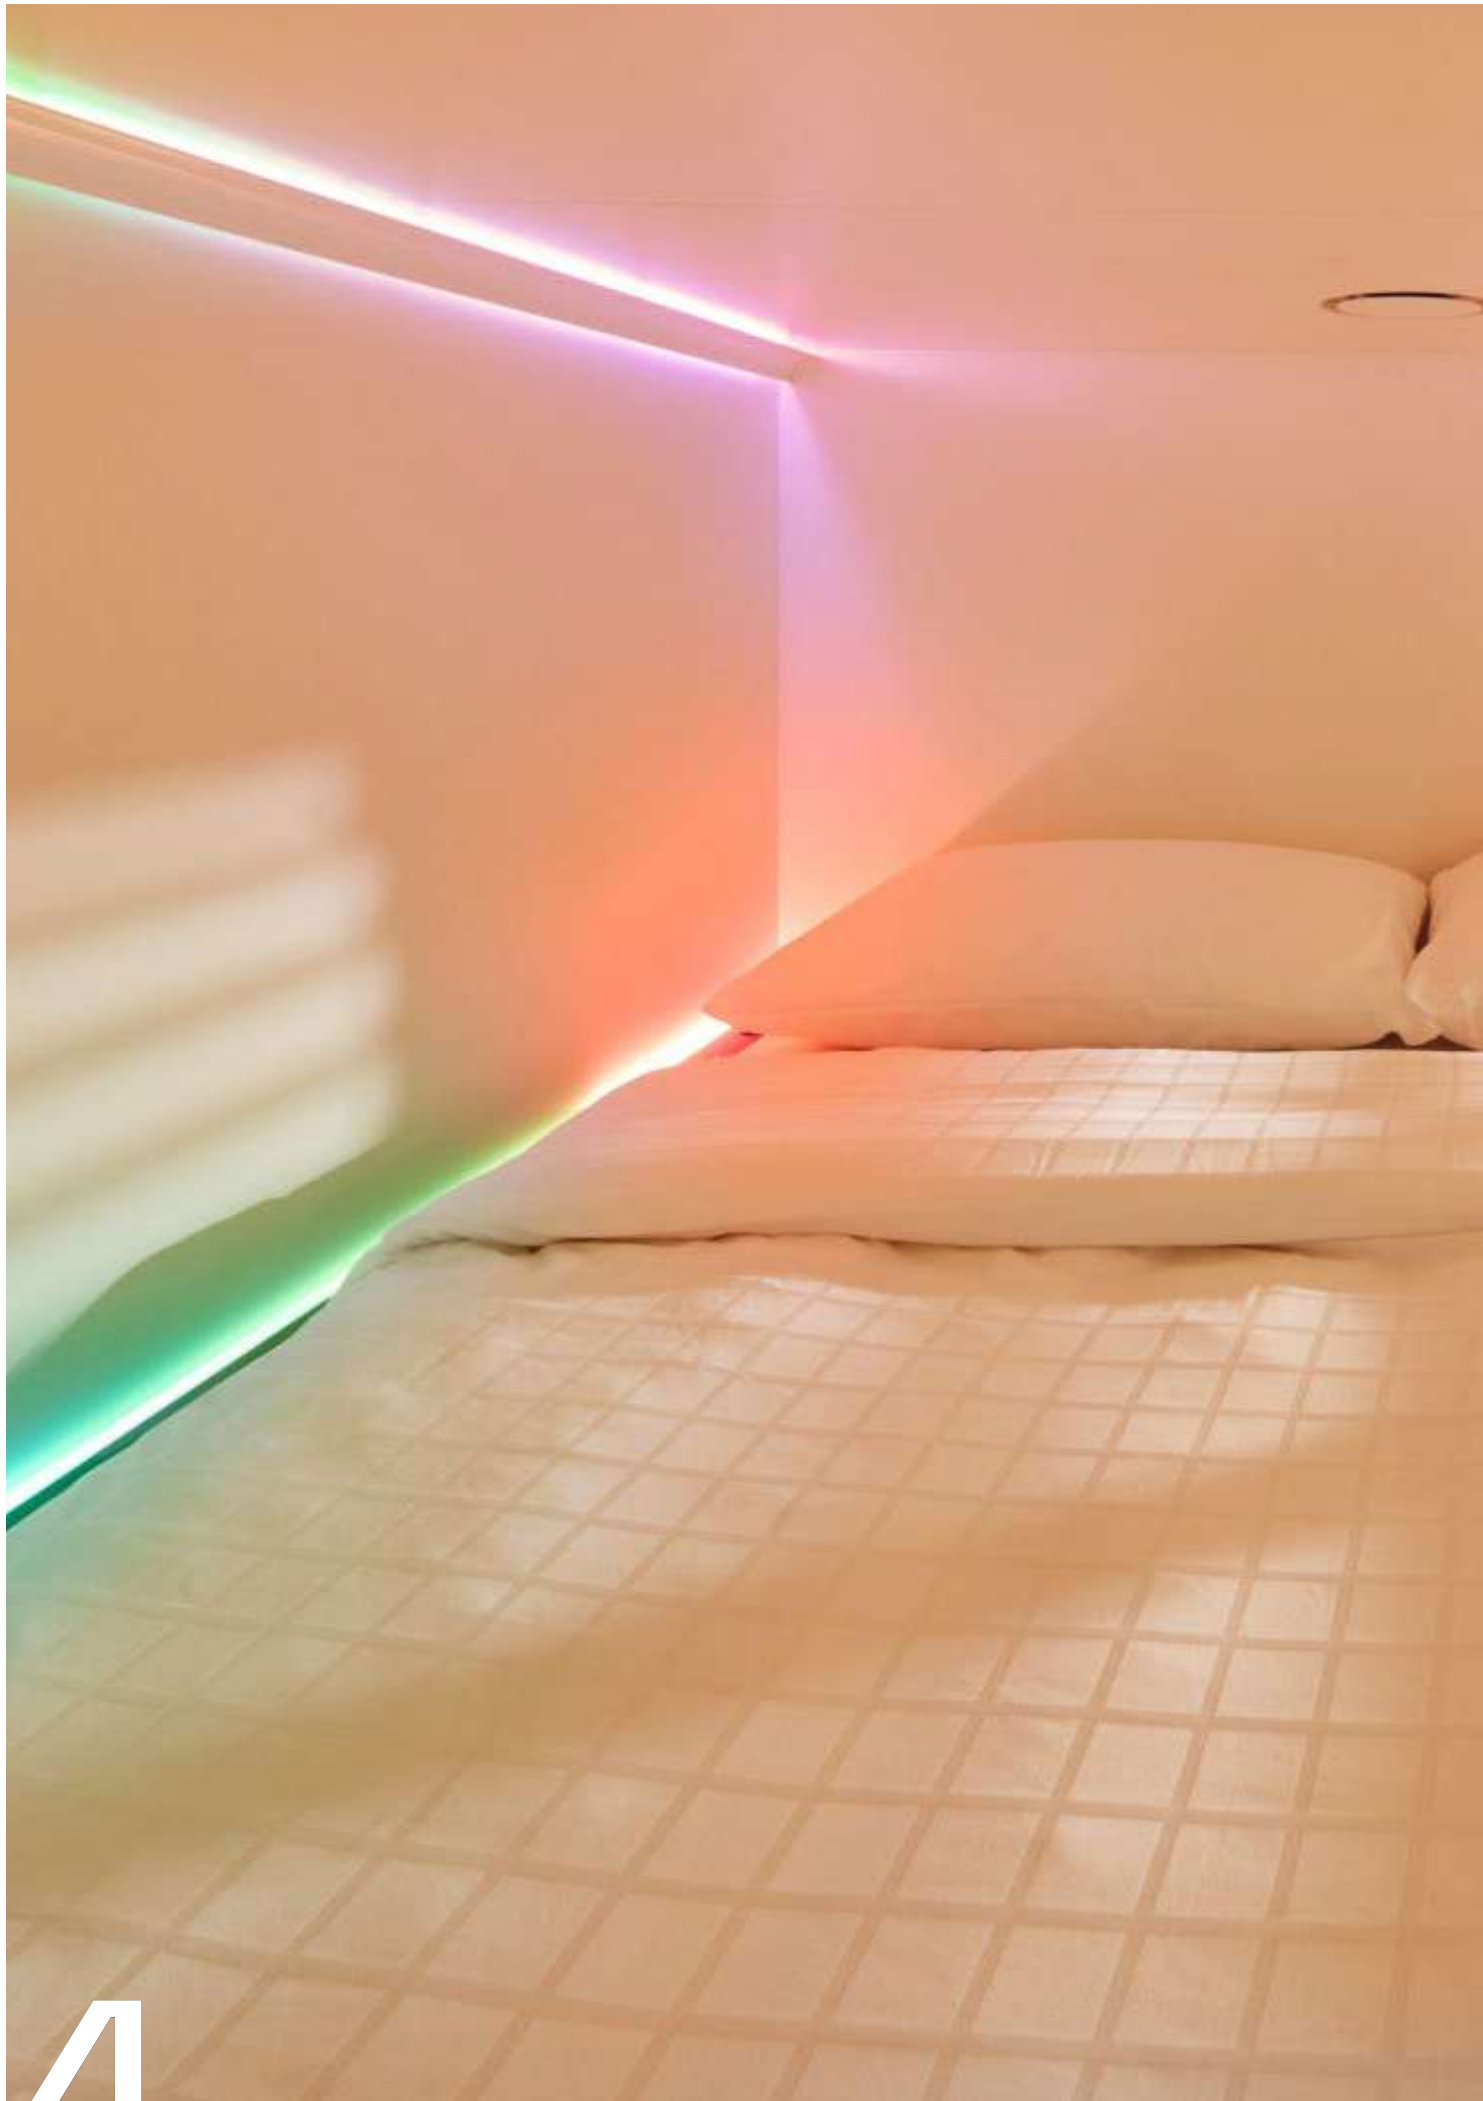

181



Scan for full info

DiGi LED Strip RGBTW


Key Specs

Power Consumption (W/m)	20
Pixel pitch (mm)	100
LED quantity (per meter)	60
Lumen Output (lm/m)	1196
Cutting interval (mm)	100

Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE


RoHS

Temp
-25 ~ +60°C

Dimensions (In mm)



Related Items More available



Mounting

- Profile Straight
- Profile Curve
- Mounting clip



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24



DiGi LED Cable

- Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 16mm 24V


Key Specs

Power Consumption (W/m)	17
Pixel pitch (mm)	16,66
LED quantity (per meter)	60
Luminous Flux (lm)	450
Cutting interval (mm)	100

Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (in mm)



Related Items More available



Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile



DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit



Power Supply

➤ Meanwell HLG 320 24

➤ Meanwell HLG 480 24



DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 16mm 12V


Key Specs

Power Consumption (W/m)	14,4
Pixel pitch (mm)	16,67
LED quantity (per meter)	60
Luminous Flux (lm)	450
Cutting interval (mm)	16,67

Color Range



Beam Angle



Specifications

SPI

IP20


12V
DC

CE

RoHS

Temp
-30 ~ +55°C

Dimensions (in mm)

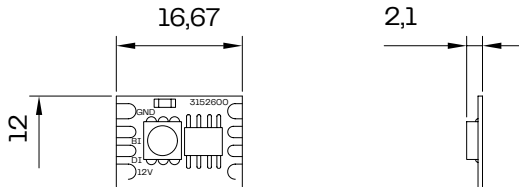

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 12

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0,14





181



Scan for full info

DiGi LED Strip RGB 24mm 12V


Key Specs

Power Consumption (W/m)	10
Pixel pitch (mm)	24
LED quantity (per meter)	42
Luminous Flux (lm)	315
Cutting interval (mm)	24

Color Range



Beam Angle



Specifications

SPI

IP20


12V
DC

CE

RoHS

Temp
-30 ~ +55°C

Dimensions (In mm)

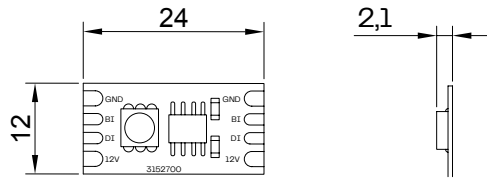

Related Items More available

Profiles

➤ Aluminum Profile High

➤ Aluminum 3535 Profile

➤ Aluminum Plaster Profile

DiGidot C4

➤ Live

➤ Extended

➤ PxLNet Transceiver kit

Power Supply

➤ Meanwell HLG 320 12

DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 38mm 12V


Key Specs

Power Consumption (W/m)	6,5
Pixel pitch (mm)	38,46
LED quantity (per meter)	26
Luminous Flux (lm)	170
Cutting interval (mm)	38,46

Color Range



Beam Angle



Specifications

SPI

IP20


12V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (in mm)

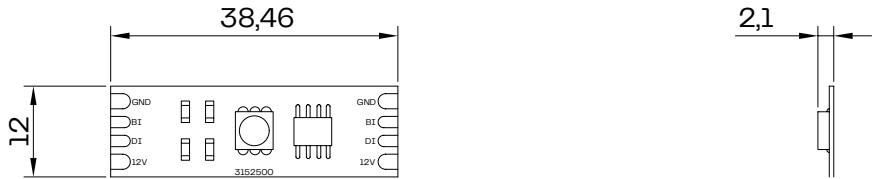

Related Items More available



Profiles

▾ 3535



DiGidot C4

▾ Live
▾ Extended
▾ PxLNet Transceiver kit



Power Supply

▾ Meanwell HLG 320 12



DiGi LED Cable

▾ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGB 83mm 24V


Key Specs

Power Consumption (W/m)	16,8
Pixel pitch (mm)	83,33
LED quantity (per meter)	26
Luminous Flux (lm)	570
Cutting interval (mm)	83,33

Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (in mm)

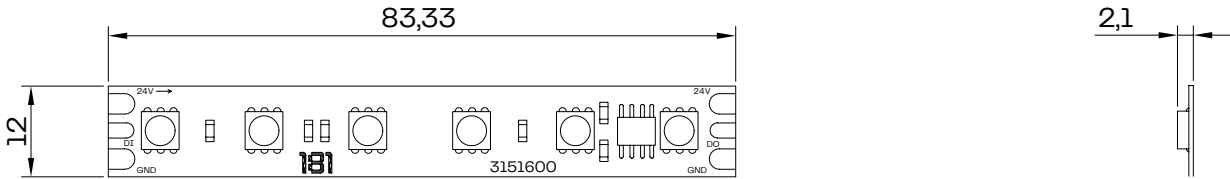

Related Items More available



Profiles

▾ 3535



DiGidot C4

▾ Live
▾ Extended
▾ PxLNet Transceiver kit



Power Supply

▾ Meanwell HLG 320 24



DiGi LED Cable

▾ Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGBW 100mm 24V


Key Specs

Power Consumption (W/m)	19,2
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (lm)	920
Cutting interval (mm)	100

Color Range



Beam Angle



Specifications

SPI

IP20


24V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (In mm)

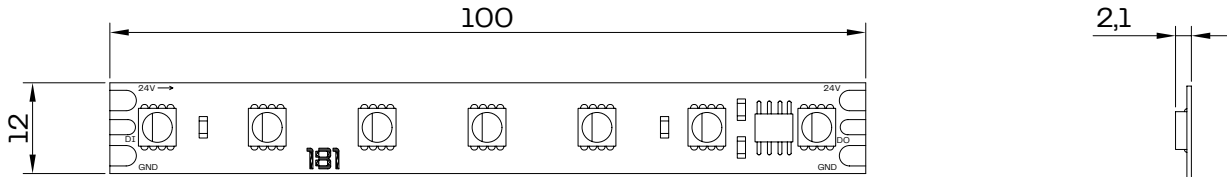

Related Items More available



Profiles

3535



DiGidot C4

Live
Extended
PxLNet Transceiver kit



Power Supply

Meanwell RSP 200 24



DiGi LED Cable

Digital LED Cable 2x1 + 2x0.14

181



Scan for full info

DiGi LED Strip Amber Drift 16mm 12V


Key Specs

Power Consumption (W/m)	14,4
Pixel pitch (mm)	16.67
LED quantity (per meter)	60
Luminous Flux (lm)	930
Cutting interval (mm)	16,67

Color Range



Beam Angle



Specifications

SPI

IP20


12V
DC

CE

RoHS

Temp
-20 ~ +60°C

Dimensions (in mm)

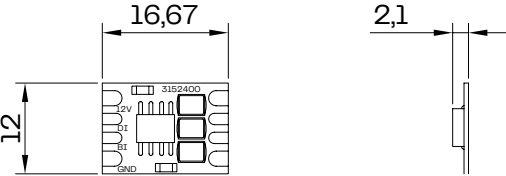

Related Items More available

Profiles

- Aluminum Profile High
- Aluminum 3535 Profile
- Aluminum Plaster Profile

DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit

Power Supply

- Meanwell RSP 200 12

DiGi LED Cable

- Digital LED Cable 2x1 + 2x0.14



181



DiGi LED Strip 3000K IP68

Key Specs


Power Consumption (W/m)	15
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (lm)	485



Color Range



Beam Angle



Specifications

SPI

IP68

IK08

24V DC

Temp
-20 - +60°C


UL

UK CA

RoHS

CE

Dimensions (in mm)



Related Items More available



Profiles

LED Profile 3535



DiGidot C4

Live
Extended
PxLNet Transceiver kit



Power Supply

Meanwell HLG 150 24
Meanwell HLG 240 24
Meanwell HLG 320 24



DiGi LED Cable

Digital LED Cable 2x1 + 2x0.14



181



Scan for full info

DiGi LED Strip RGBW IP68

Key Specs


Power Consumption (W/m)	18
Pixel pitch (mm)	100
LED quantity (per meter)	70
Luminous Flux (lm)	873



Color Range




Beam Angle



Specifications



Dimensions (in mm)



Related Items More available



Profiles

➤ Aluminum H Profile High



DiGidot C4

➤ Live
➤ Extended
➤ PxLNet Transceiver kit



Power Supply

➤ Meanwell HLG 150 24
➤ Meanwell HLG 240 24
➤ Meanwell HLG 320 24



DiGi LED Cable

➤ Digital LED Cable 2x1 + 2x0.14

131

Concealed

64

Panels





181



Scan for full info

DiGi FlexSheet

Key Specs


Pixel Pitch (mm)	40
Pixels	96
Power Consumption (W)	24
Luminous Flux (lm)	680



Color Range



Beam Angle



Specifications

SPI

Temp
-30 - +60°C


IP20

CE


RoHS

12V
DC

Dimensions (in mm)

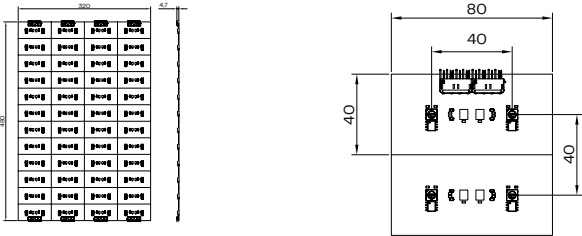

Related Items More available



Connector

▾ PCB Leader



DiGidot PxLNet Node

▾ PxLNet Node U48
▾ PxLNet Node U96
▾ PxLNet Transceiver



Input Cable

▾ Push in terminal to Female connector



Servers

▾ i5 Server
▾ i7 Server
▾ i9 Server



181



Scan for full info

DiGi Evenlight Panel

Key Specs


Color Range	RGBW
LED Type	SMD3535
Pixels	64
Luminous Flux (lm)	33



Color Range



Beam Angle



Specifications

SPI

PWM

IP20

24V DC


CE

RoHS

M16

Temp
-30 - +70°C

Dimensions (In mm)

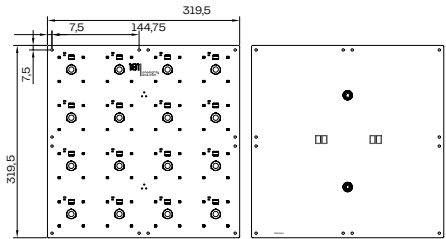

Related Items More available

Madrix

- MADRIX License
- MADRIX Key

DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver

Power Supply

- RHP-1U Rack System
- RKP-1UT Rack System

Servers


- i5 Server
- i7 Server
- i9 Server

70

Channels

181

Aluminum Profiles

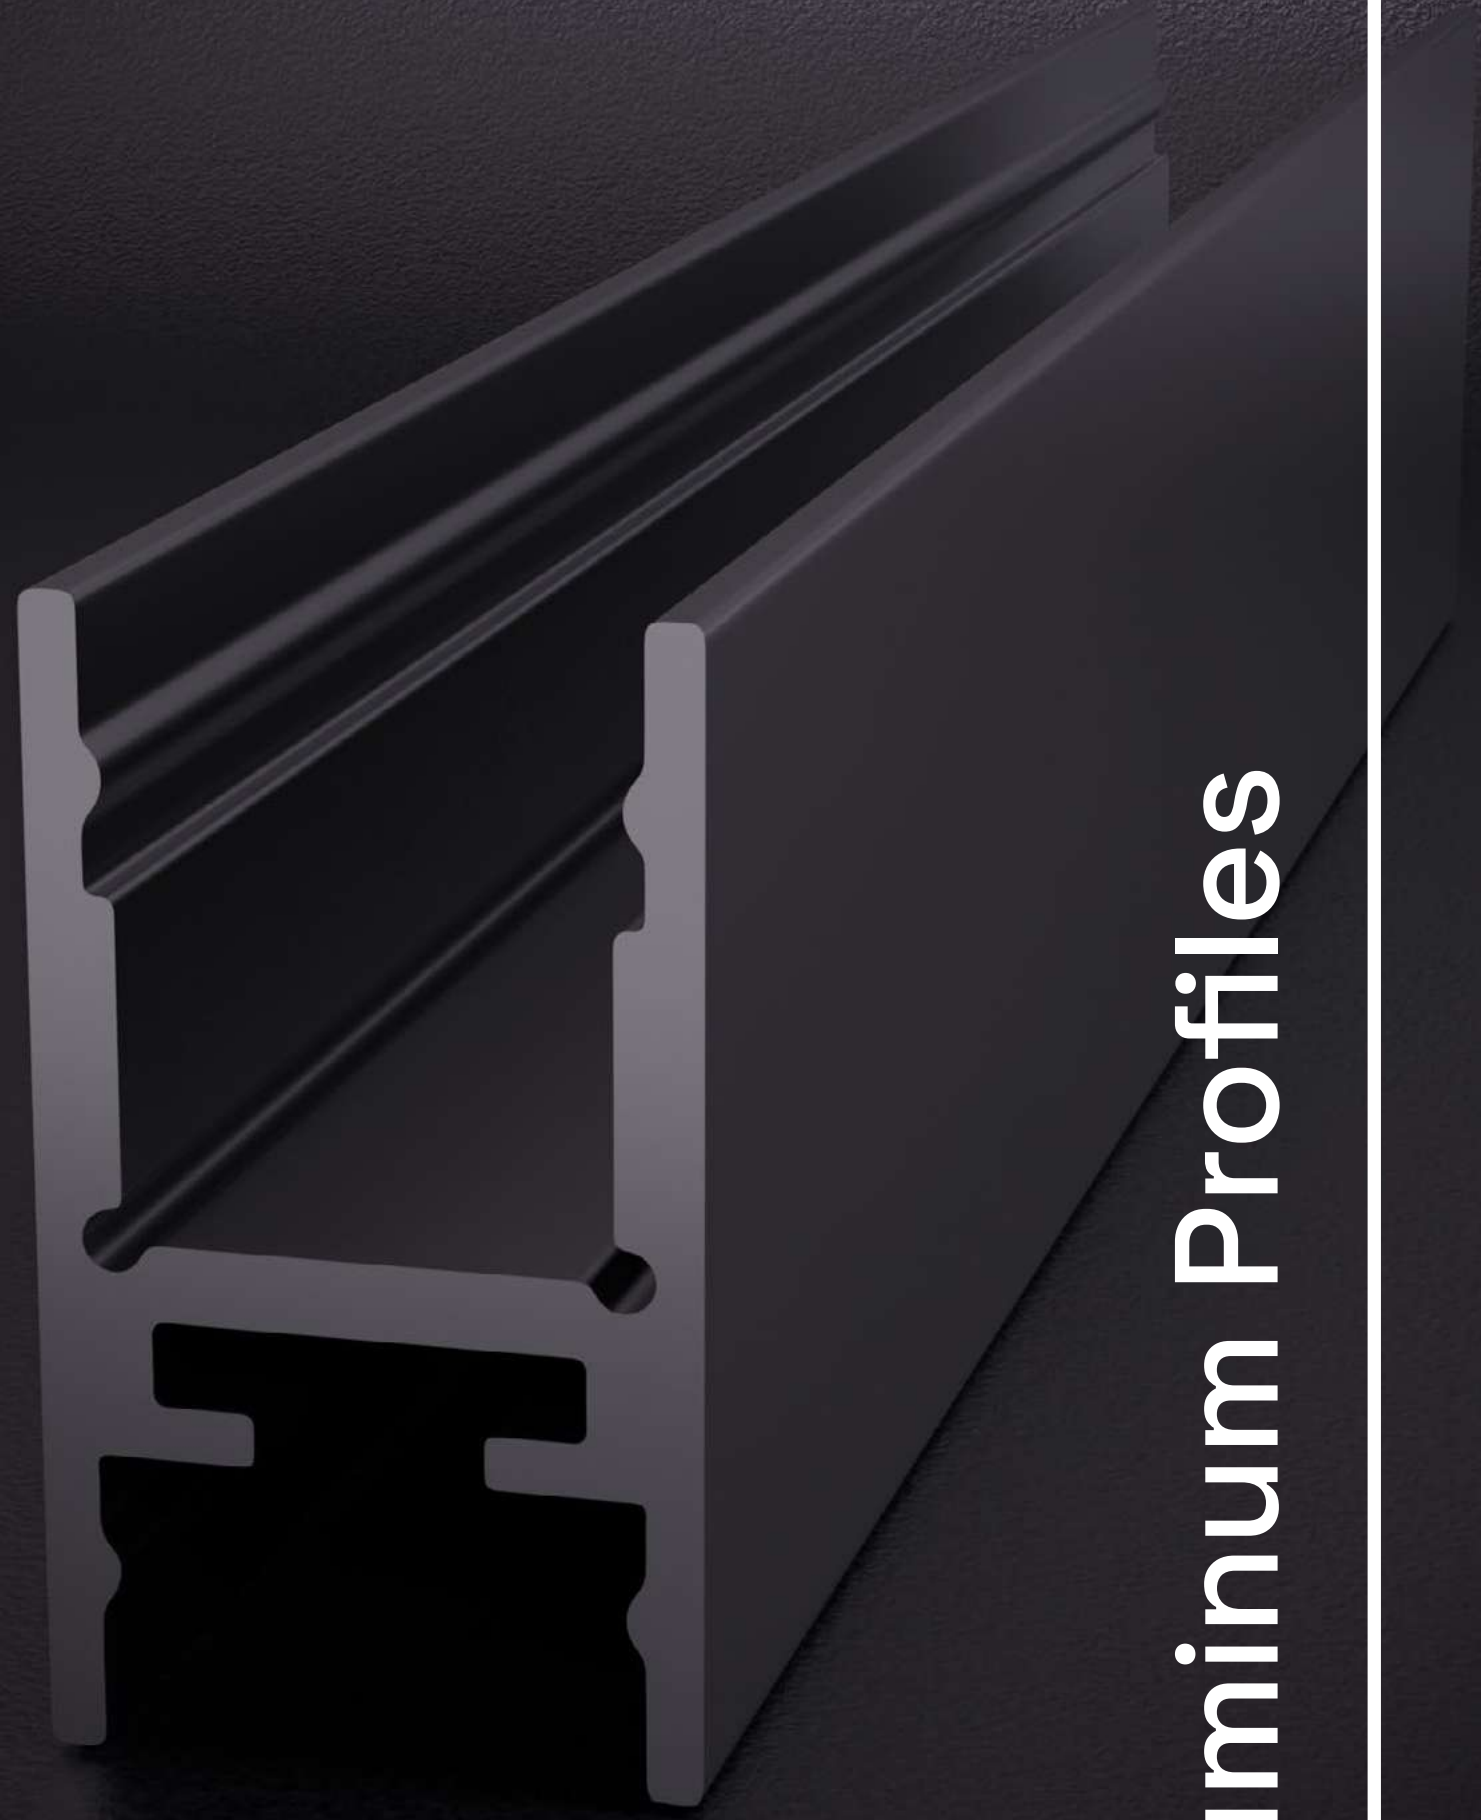



181



Scan for full info

Aluminum Profile High

Key Specs

Height (mm)	19.65
Width (mm)	18.3
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color


Grey

Black

Custom
ANY RAL COLOR



Dimensions (in mm)



Related Items More available



Profile Covers

- Flat Clear
- Flat Opal
- Flat Black (translucent)



LED Strip

- 5m SE



Profile Mounting clip

- 9112X/9111X Grey
- 9112X/9111X Black



Adjustable clip

- 9112X/9111X Silver



181



Scan for full info

Aluminum Profile Low

Key Specs


Height (mm)	13
Width (mm)	18.3
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR

Dimensions (in mm)



Related Items More available



Profile Covers

▾ Flat Clear


▾ Flat Opal

▾ Flat Black (translucent)



LED Strip

▾ 5m COB



Profile Mounting clip

▾ 9112X/9111X Grey

▾ 9112X/9111X Black



Adjustable clip

▾ 9112X/9111X Silver



181




Scan for full info

LED Profile H High

Key Specs


Height (mm)	32
Width (mm)	18.3
Length (mm)	3000
Material	Aluminum 6063-T5
Finish	Anodised

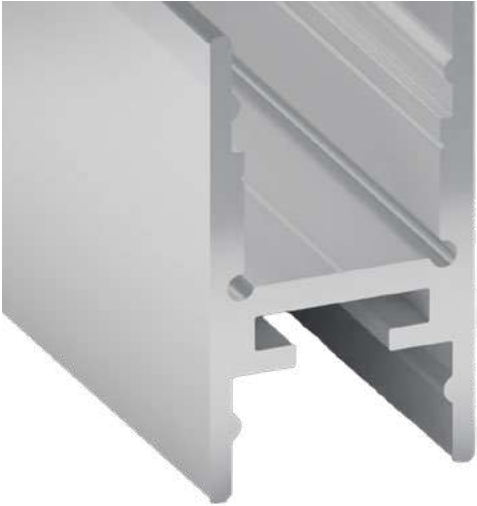

Housing Color

- Grey
- Black

Dimensions (in mm)



Related Items More available



Profile Covers

▾ Round Frost

▾ Round Clear



Profile Endcap

▾ Grey

▾ Black



Profile Mounting clip

▾ Mounting Clip Profile H High



Profile covers

▾ Profile Cover Flat



181



Scan for full info

Aluminum Profile Half Round

Key Specs


Height (mm)	9
Width (mm)	18
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR

Dimensions (in mm)



Related Items More available



Profile Covers

▾ Round Frost

▾ Round Clear



LED Strip

▾ 5m CSP RGBW



Profile Mounting clip

▾ 9112X/9111X Silver

▾ 9112X/9111X black



Profile Covers

▾ Flat Opal

▾ Flat Black (translucent)



181



Scan for full info

LED Profile 3535

Key Specs


Height (mm)	35
Width (mm)	35
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (In mm)



Related Items More available



Profile Covers

▾ Flat Opal

▾ Flat Black (translucent)



LED Strip


▾ DiGi 5m RGBW 100mm 24V



Pendant Steelwire


▾ Silver

▾ Black



Profile Mounting Clip

▾ Silver

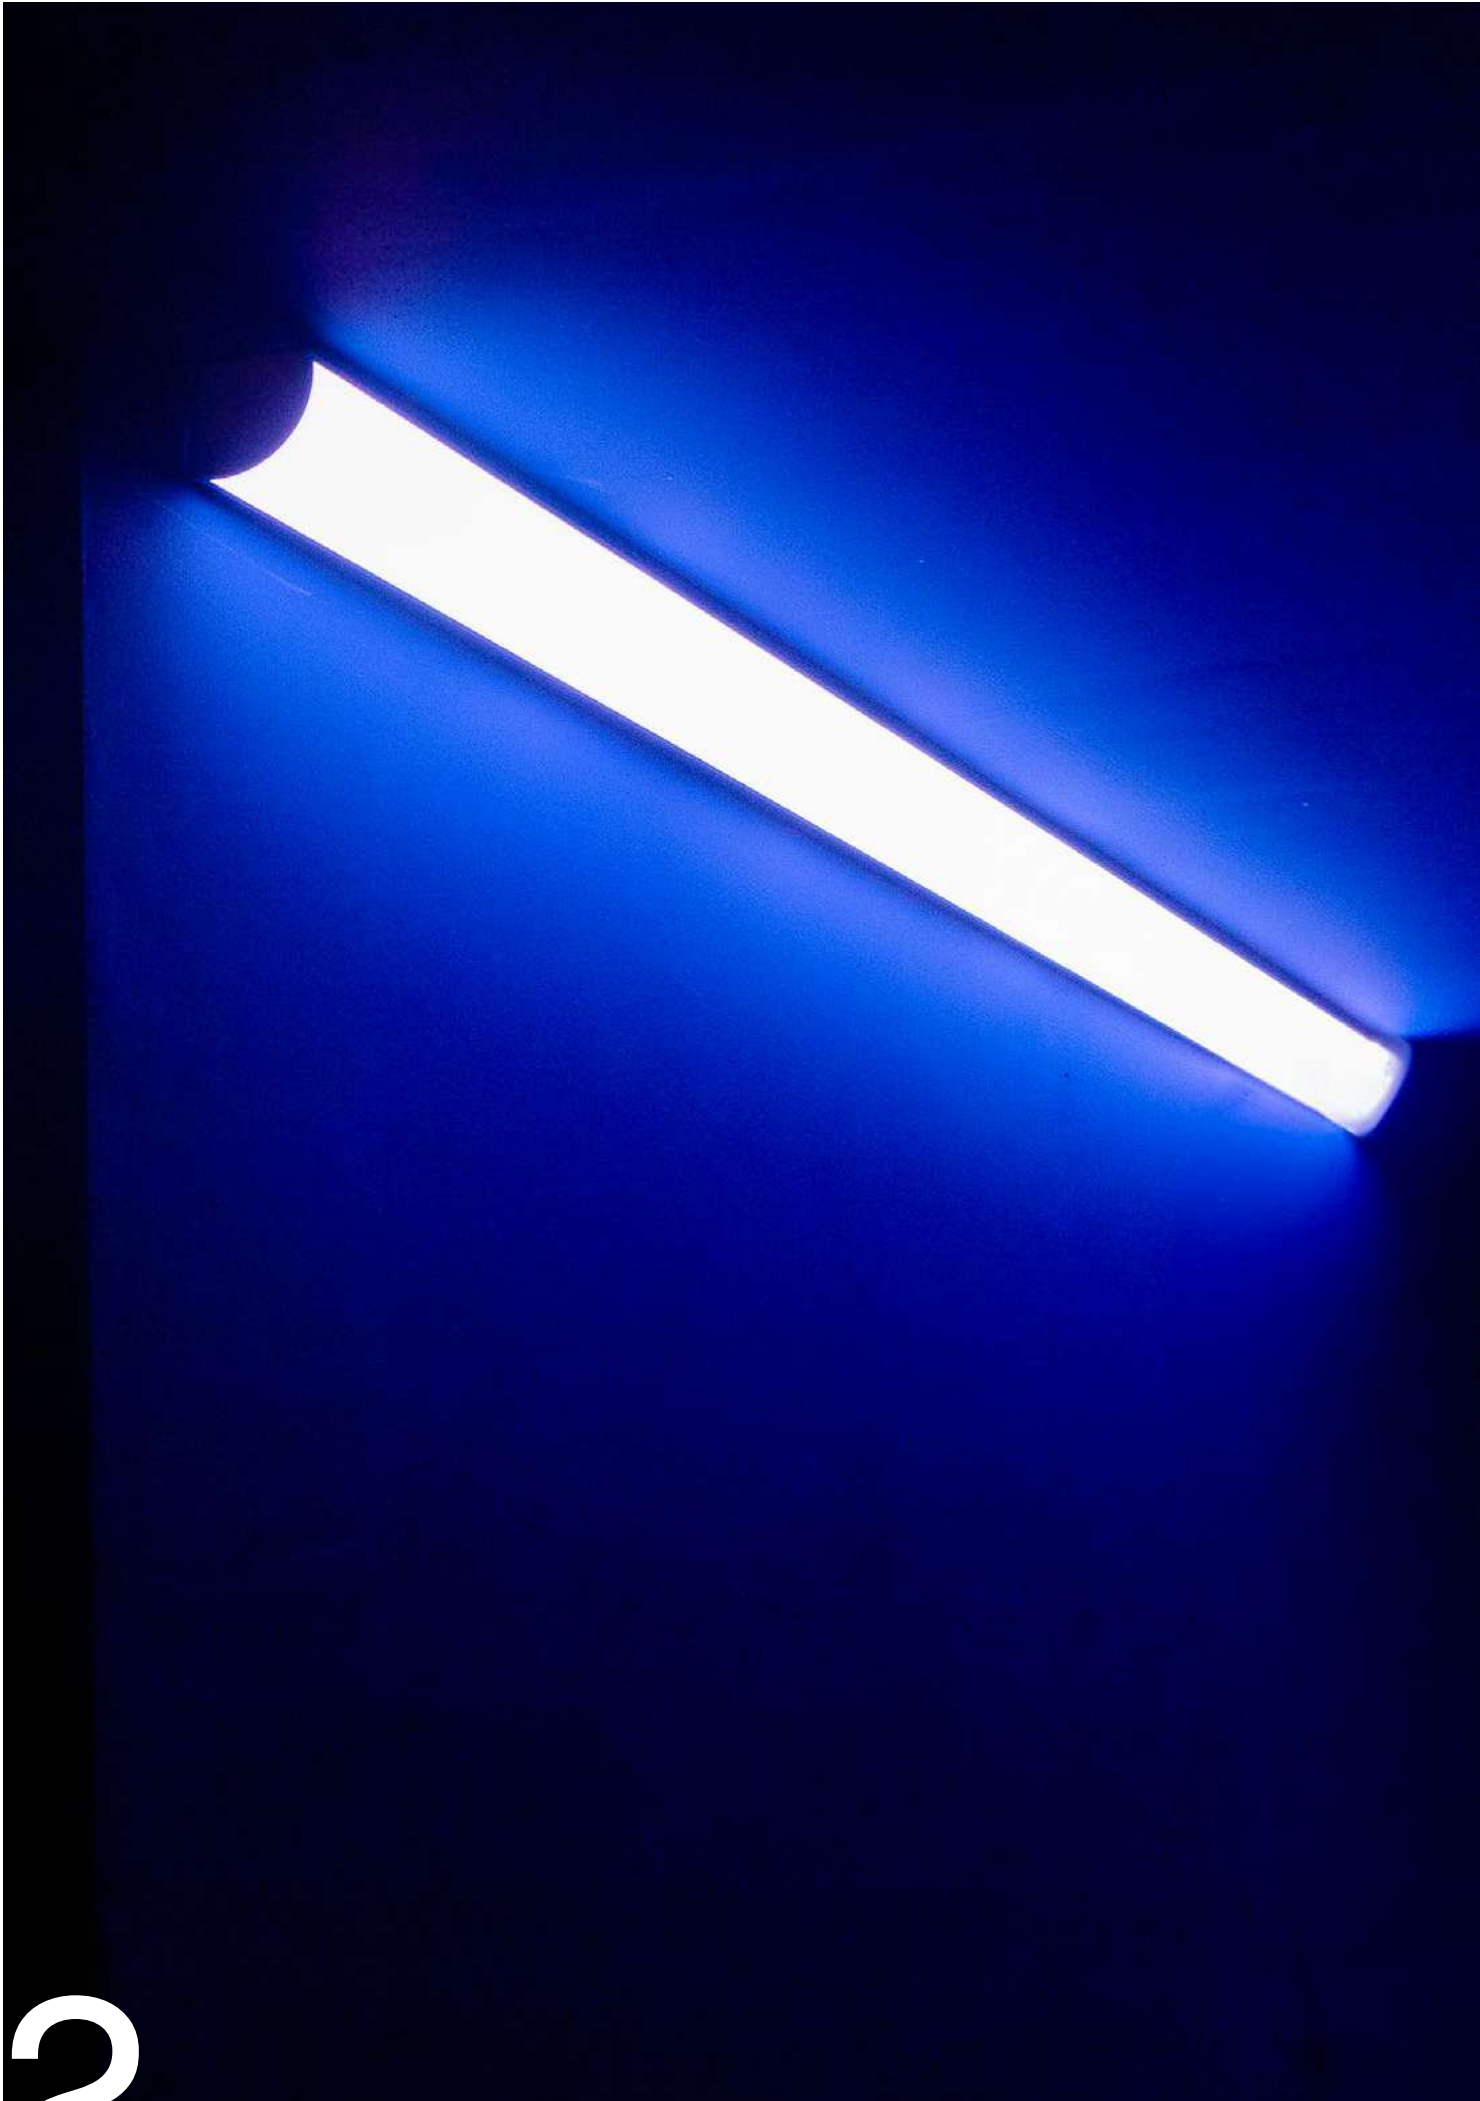

181



Scan for full info

Aluminum Profile Corner

Key Specs


Height (mm)	29.65
Width (mm)	29.65
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR

Dimensions (in mm)



Related Items More available



Profile Cover

▾ Round Opal




Profile Endcap

▾ LED Strip 5m FS




LED Strip

▾ 5m FS



Profile Mounting Clip

▾ Silver

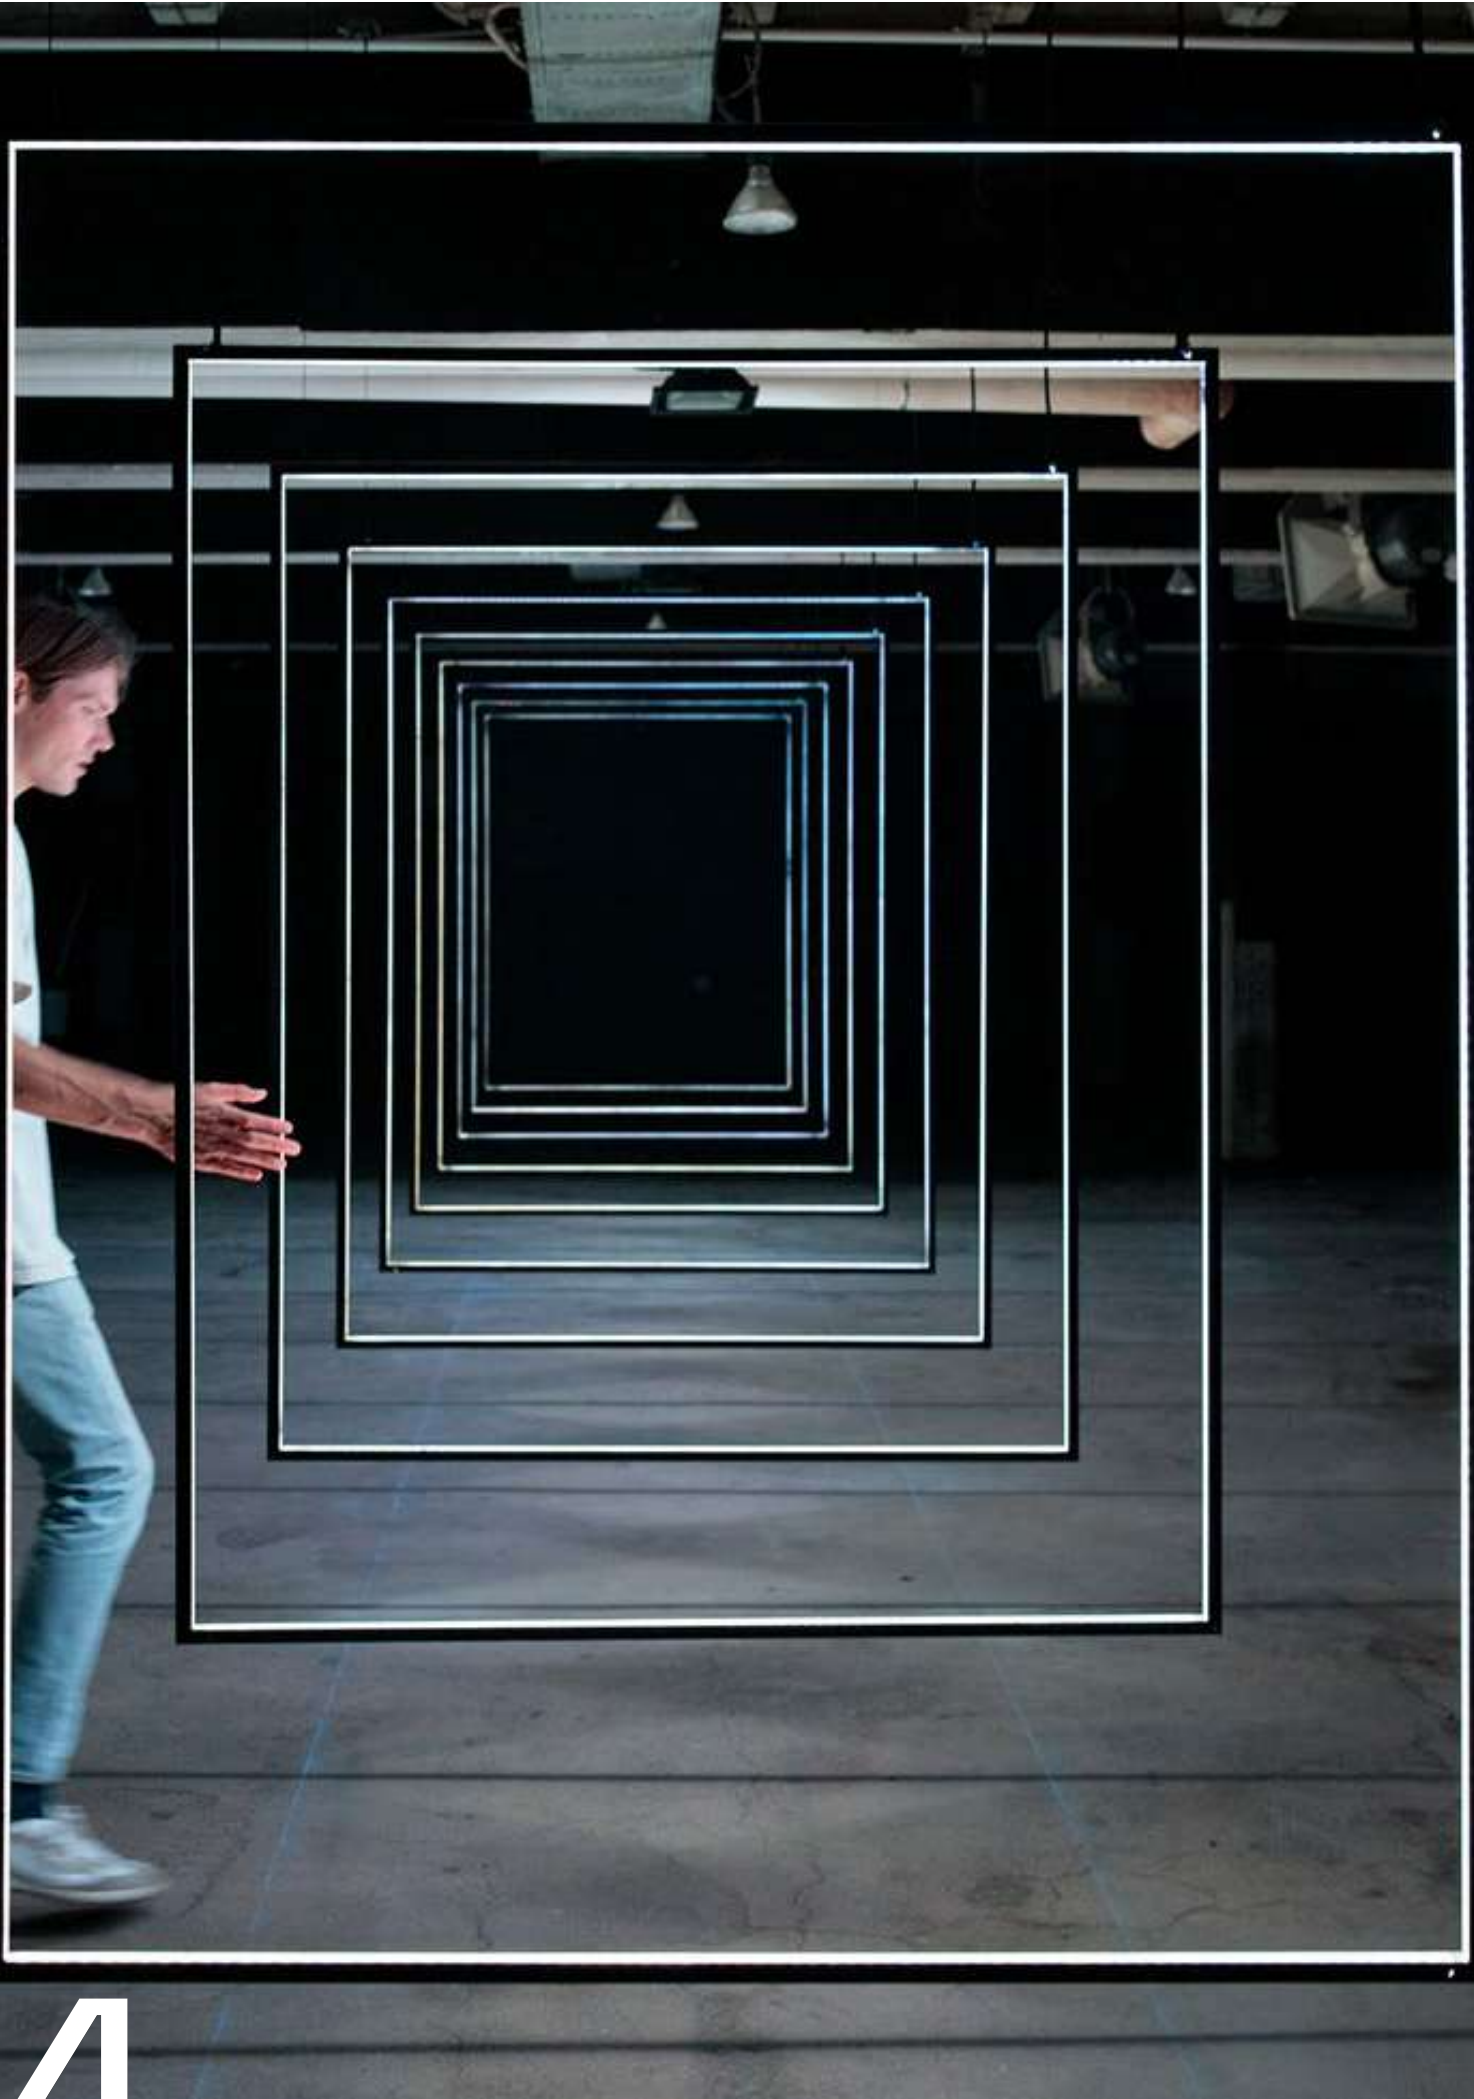

181



Scan for full info

Aluminum Profile Mini

Key Specs


Height (mm)	10.5
Width (mm)	10.5
Length (mm)	3000
Material	Aluminum
Finish	Anodised

Housing Color

- Grey
- Black
- Custom
ANY RAL COLOR



Dimensions (in mm)



Related Items More available



Profile Cover

 Cover mini



Profile Endcap mini

 Silver
 Black



LED Strip

 COB LED strip



Pendant Steelwire

 Silver
 Black



181



Scan for full info

Aluminum Plaster Profile

Key Specs


Height (mm)	19.65
Width (mm)	56
Length (mm)	3000
Material	Aluminum
Finish	Anodised



Housing Color

- Grey
- Custom
ANY RAL COLOR

Dimensions (in mm)

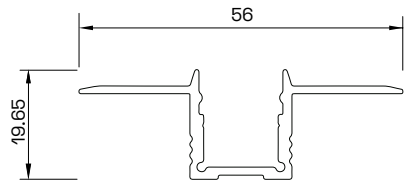


Related Items More available



Profile Covers

▾ Flat Clear

▾ Flat Opal



Profile Endcap 9111X

▾ Grey Endcap



DiGi LED Strip


▾ RGBW 100mm 24V



LED Strip

▾ High Efficiency

Direct View

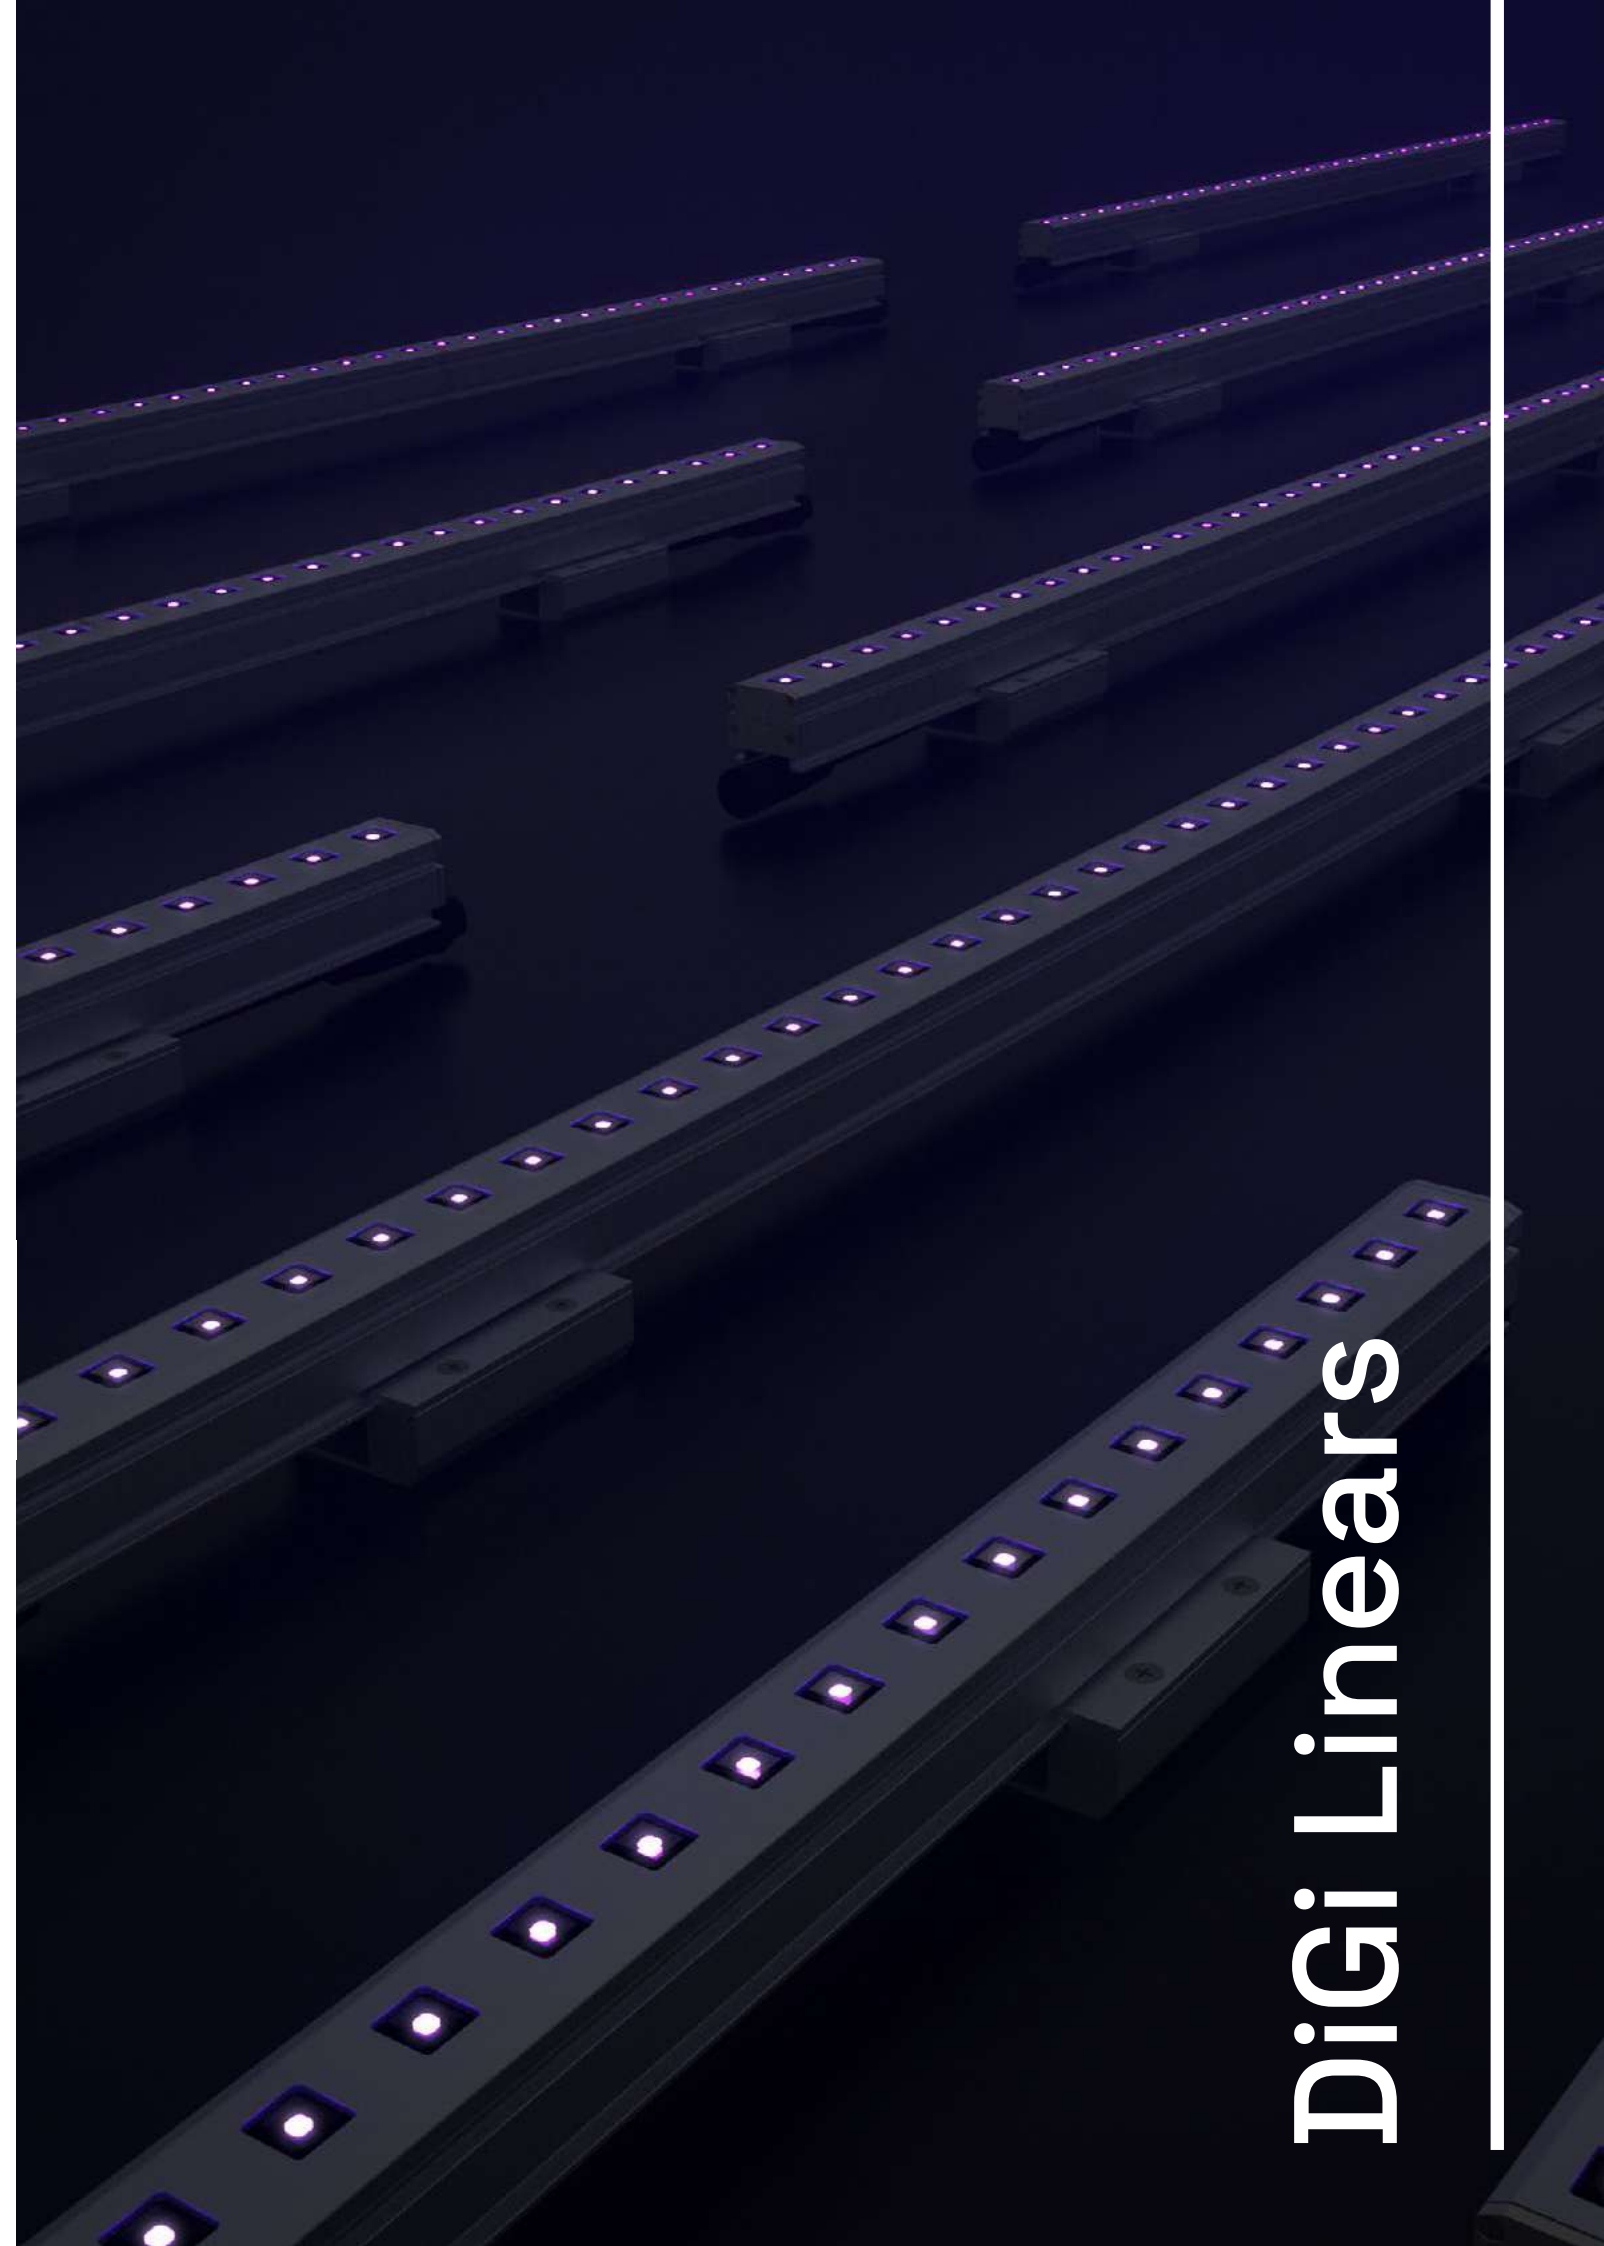

DiGi Linears



181



Scan for full info

DiGi Linear D-serie


Key Specs	RGB
Power Consumption (W/m)	10
Luminous Flux (lm)	360
Pixel pitch (mm)	25
Channels (per meter)	120
Lengths (mm)	300/600/900/1200/1500




Color Range




Beam Angle




Specifications

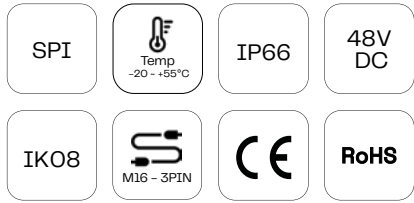

Housing Color



Dimensions (In mm)

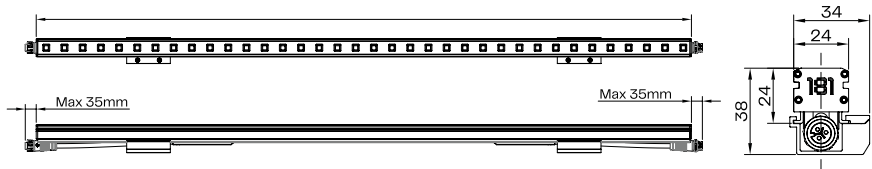

Related Items More available



M16 3-Pin Cables

- Input Cable
- Data Link Cable
- Extension Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 48
- Meanwell HLG 240 48
- Meanwell HLG 320 48



Mounting Bracket

- Mounting bracket D-Serie



181



Scan for full info

DiGi Linear E-serie


Key Specs	RGB	RGBW
Power Consumption (W/m)	12	16
Luminous Flux (lm)	195	340
Pixel pitch (mm)	75	75
Channels (per meter)	36	240
Lengths (mm)	300/600/900/1200/1500	




Color Range




Beam Angle




Specifications

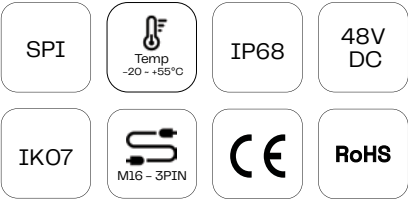

Housing Color



Dimensions (in mm)

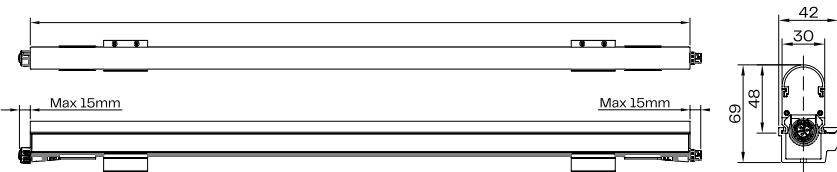

Related Items More available



M16 3-Pin Cables

- Input Cable
- Data Link Cable
- Extension Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Cable Guide

- Cable Guide E-serie



Mounting Bracket

- Mounting bracket E-serie

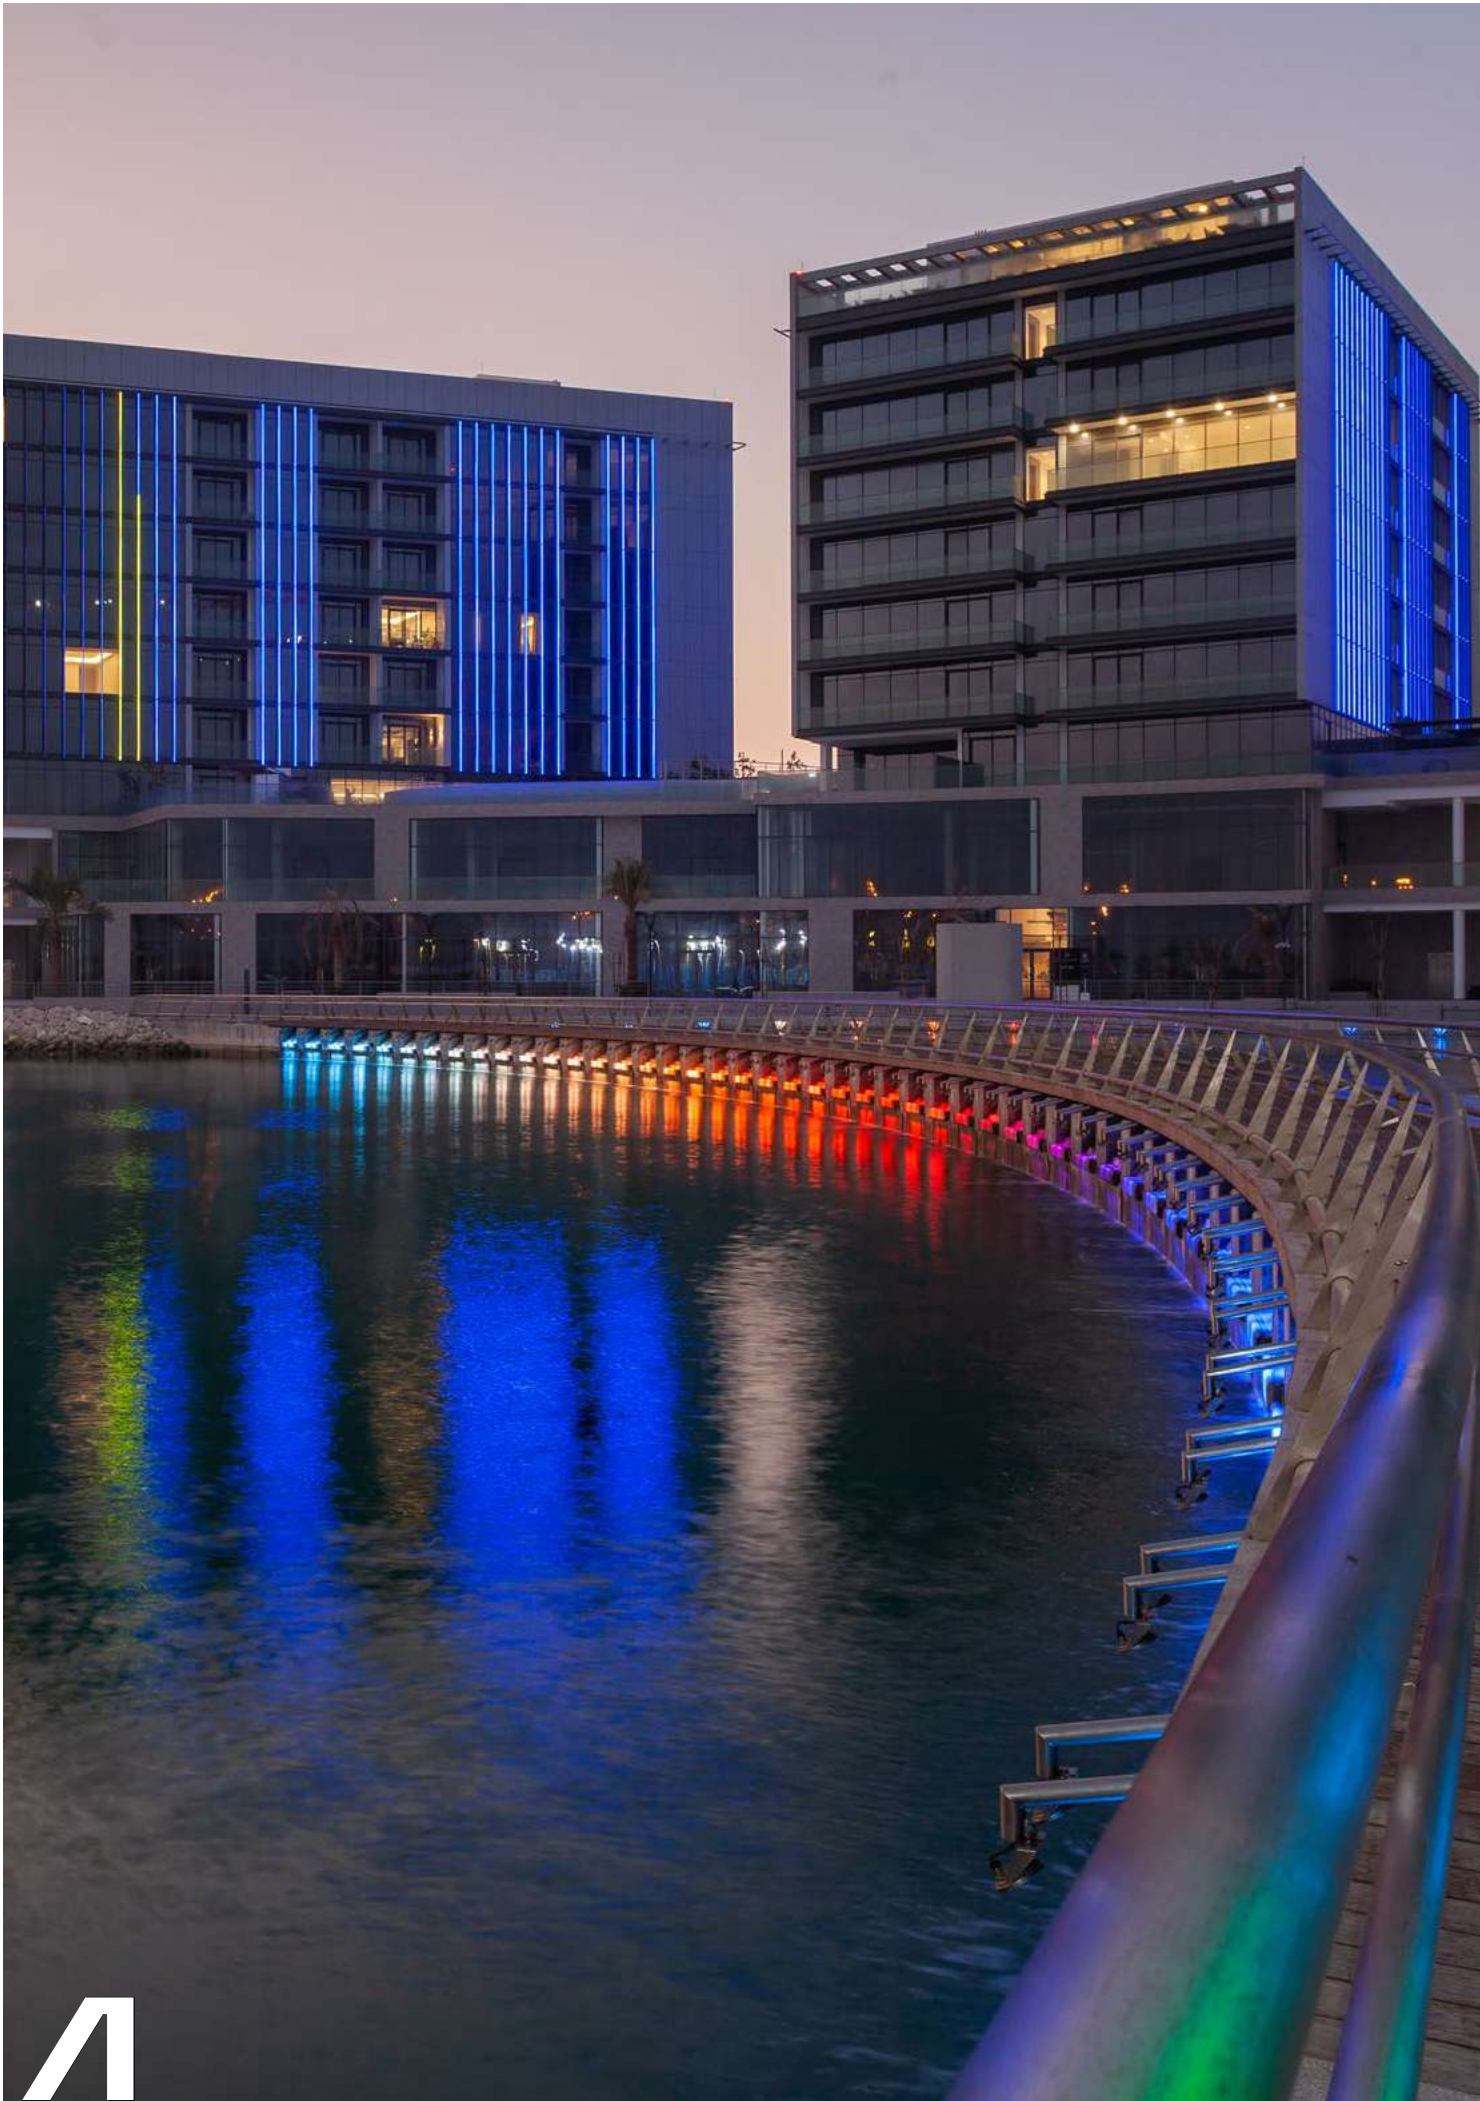

181



Scan for full info

DiGi Linear V-serie


Key Specs	RGB	RGBW	Tunable
Power Consumption (W/m)	12	15	15
Luminous Flux (lm)	203	425	299
Pixel pitch (mm)	16	16	16
Channels (p/900mm)	162	216	162
Lengths (mm)	300/600/900/1200/1500		




Color Range




Beam Angle




Specifications

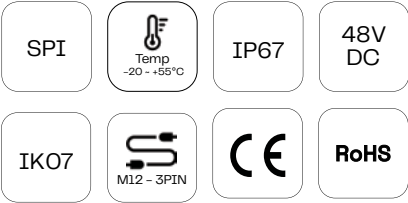

Housing Color



Dimensions (In mm)

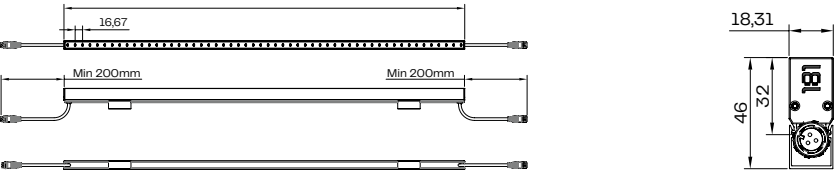

Related Items More available



M16 3-Pin Cables

- Input Cable
- Data Link Cable
- Extension Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 480 48
- Meanwell HLG 600 48



Mounting Bracket

- Mounting bracket V-serie

131

Direct View

96

Dots





Scan for full info

DiGi Module XT3


Key Specs	RGB	RGBW
Luminous Flux (lm)	19	24
LEDs per Pixel	3	4
Power Consumption (W)	0,75	1
Pixel pitch (mm)	Customizable from 100mm	




Color Range



Beam Angle





Specifications



Housing Color



Dimensions (in mm)

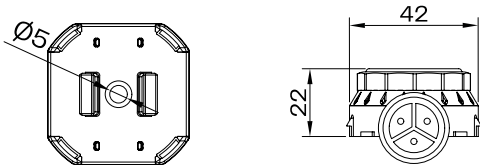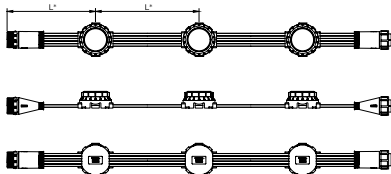

Related Items More available




M20E Cables

- Extension Cable
- Data Link Cable




DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



XT Add-on

- XT Flat
- XT Turbo Module
- XT Bulb



Mounting Clip

- Mounting clip XT Module



181



Scan for full info

DiGi Module XT6


Key Specs	RGB	RGBW
Luminous Flux (lm)	38	50
LEDs per Pixel	6	8
Power Consumption (W)	1,5	2
Pixel pitch (mm)	Customizable from 100mm	




Color Range




Beam Angle






Specifications



Housing Color



Dimensions (in mm)

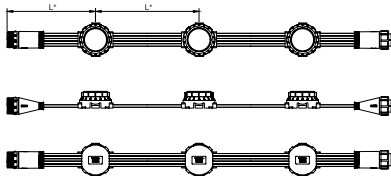

Related Items More available




M20E Cables

- Extension Cable
- Data Link Cable




DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



XT Add-on

- XT Flat
- XT Turbo Module
- XT Bulb



Mounting Clip

- Mounting clip XT Module



Scan for full info

DiGi Module E3S


Key Specs	RGB
Luminous Flux (lm)	19
LEDs per Pixel	3
Power Consumption (W)	0,75
Pixel pitch (mm)	Customizable from 100mm




Color Range



Beam Angle




Specifications

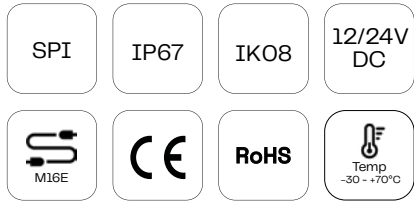

Housing Color



Dimensions (in mm)

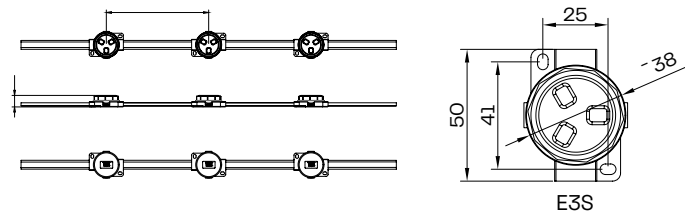

Related Items More available



M16E Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Servers

- i5 Server
- i7 Server
- i9 Server



Scan for full info

DiGi Module E6S


Key Specs		RGB
Luminous Flux (lm)	38	
LEDs per Pixel	6	
Power Consumption (W)	1,5	
Pixel pitch (mm)	Customizable from 100mm	




Color Range



Beam Angle




Specifications

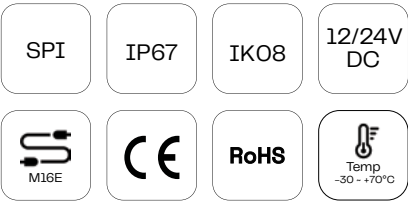

Housing Color



Dimensions (in mm)

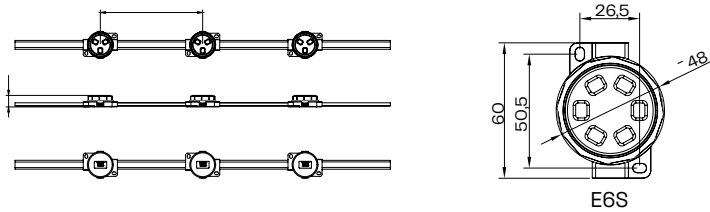

Related Items More available



M16E Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Servers

- i5 Server
- i7 Server
- i9 Server



Scan for full info

DiGi Module E12S


Key Specs		RGB
Luminous Flux (lm)	72	
LEDs per Pixel	12	
Power Consumption (W)	3	
Pixel pitch (mm)	Customizable from 100mm	




Color Range



Beam Angle




Specifications

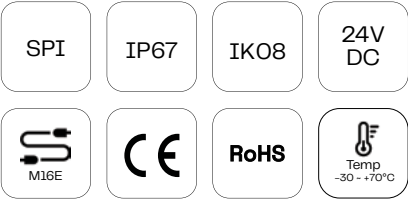

Housing Color



Dimensions (in mm)

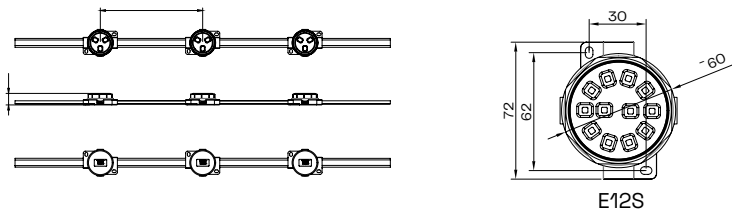

Related Items More available



M16E Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Servers

- i5 Server
- i7 Server
- i9 Server

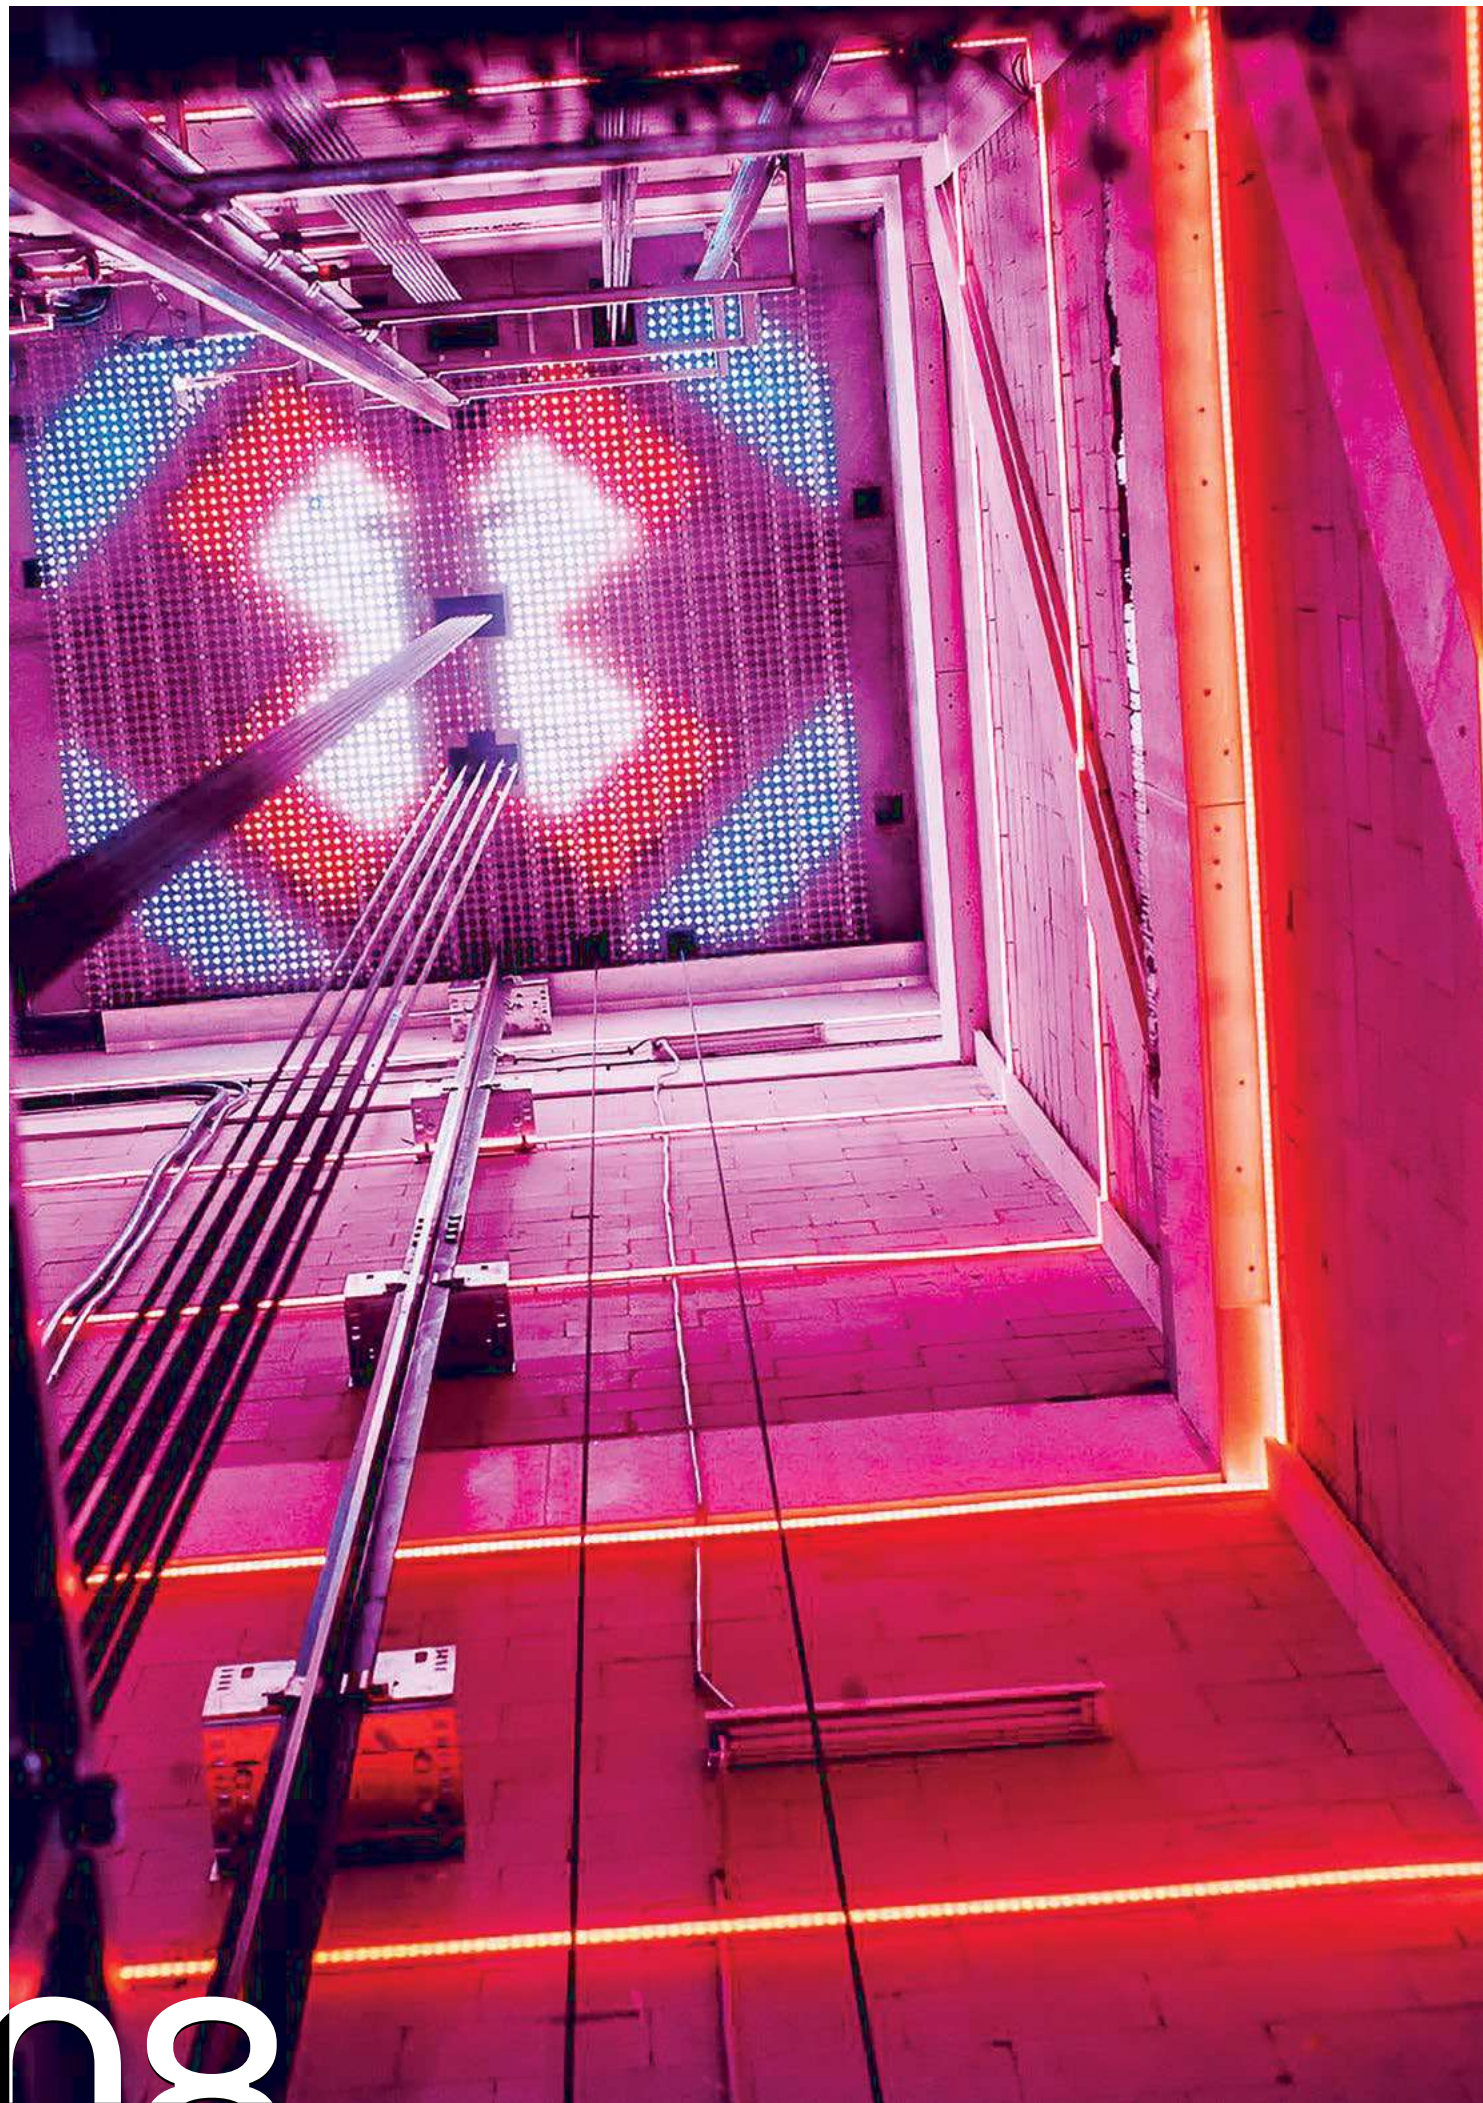


Scan for full info

DiGi Mesh

Key Specs


LEDs per Pixel	Customizable
Pixel pitch (mm)	Customizable from 40mm

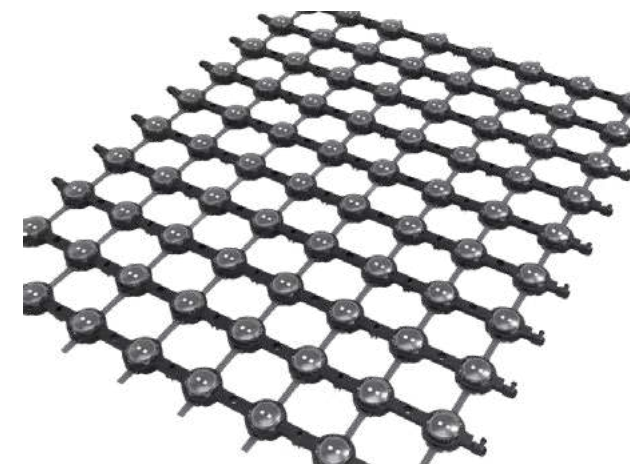

Color Range



Beam Angle






Specifications



Housing Color



Dimensions (in mm)



Related Items More available




MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Servers

- i5 Server
- i7 Server
- i9 Server

181

Direct View

110



181




Scan for full info

Neonflex Side Bend

Key Specs	White	Tunable	RGBW 3000K
Power Consumption (W/m)	10	12	17




Color Range




Specifications



Beam Angle

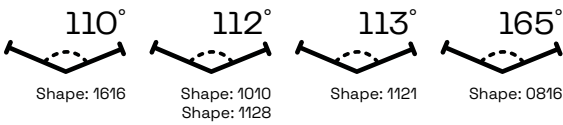

Dimensions (in mm)

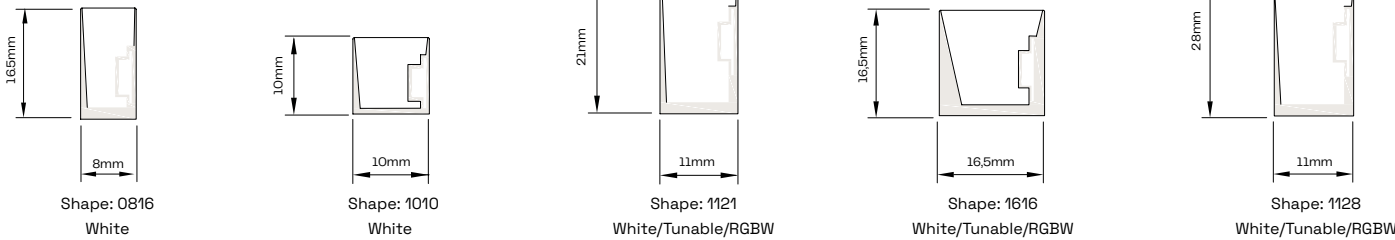

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



Drivers

- LM 100 24 G2M2
- LM 100 24 G2D2
- LM 100 24 G2A2



Mounting

- Profile Straight
- Neonflex Profile Flex
- Mounting clip



131



Scan for full info


Neonflex Top Bend

Key Specs


	White	Tunable	RGBW 3000K
Power Consumption (W/m)	12	10	17
LED quantity (per meter)	120	60	60




Color Range




Specifications

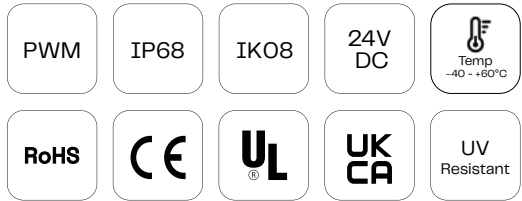


Beam Angle




Dimensions (in mm)

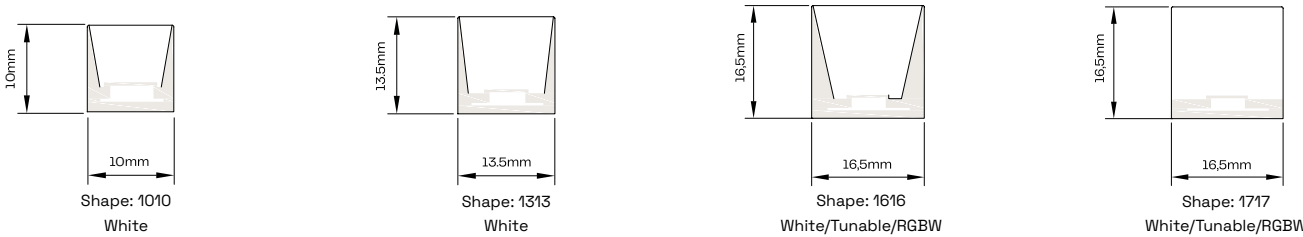

Related Items More available

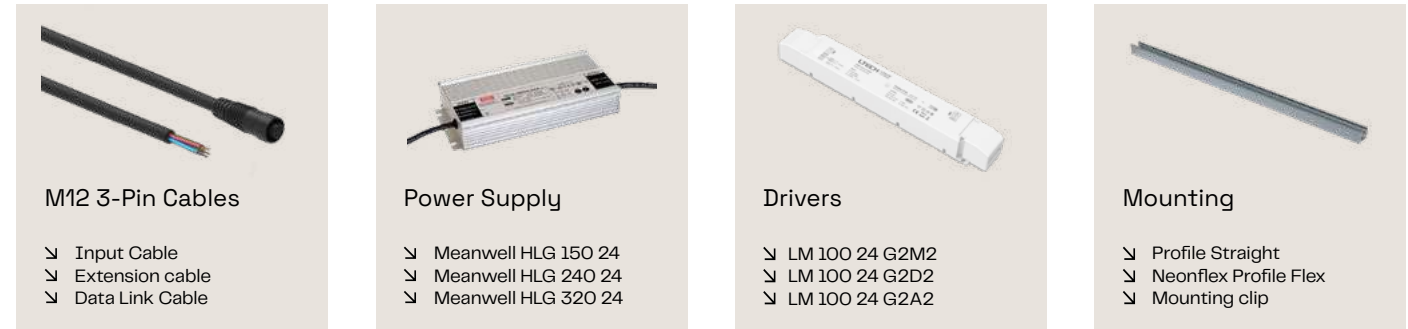

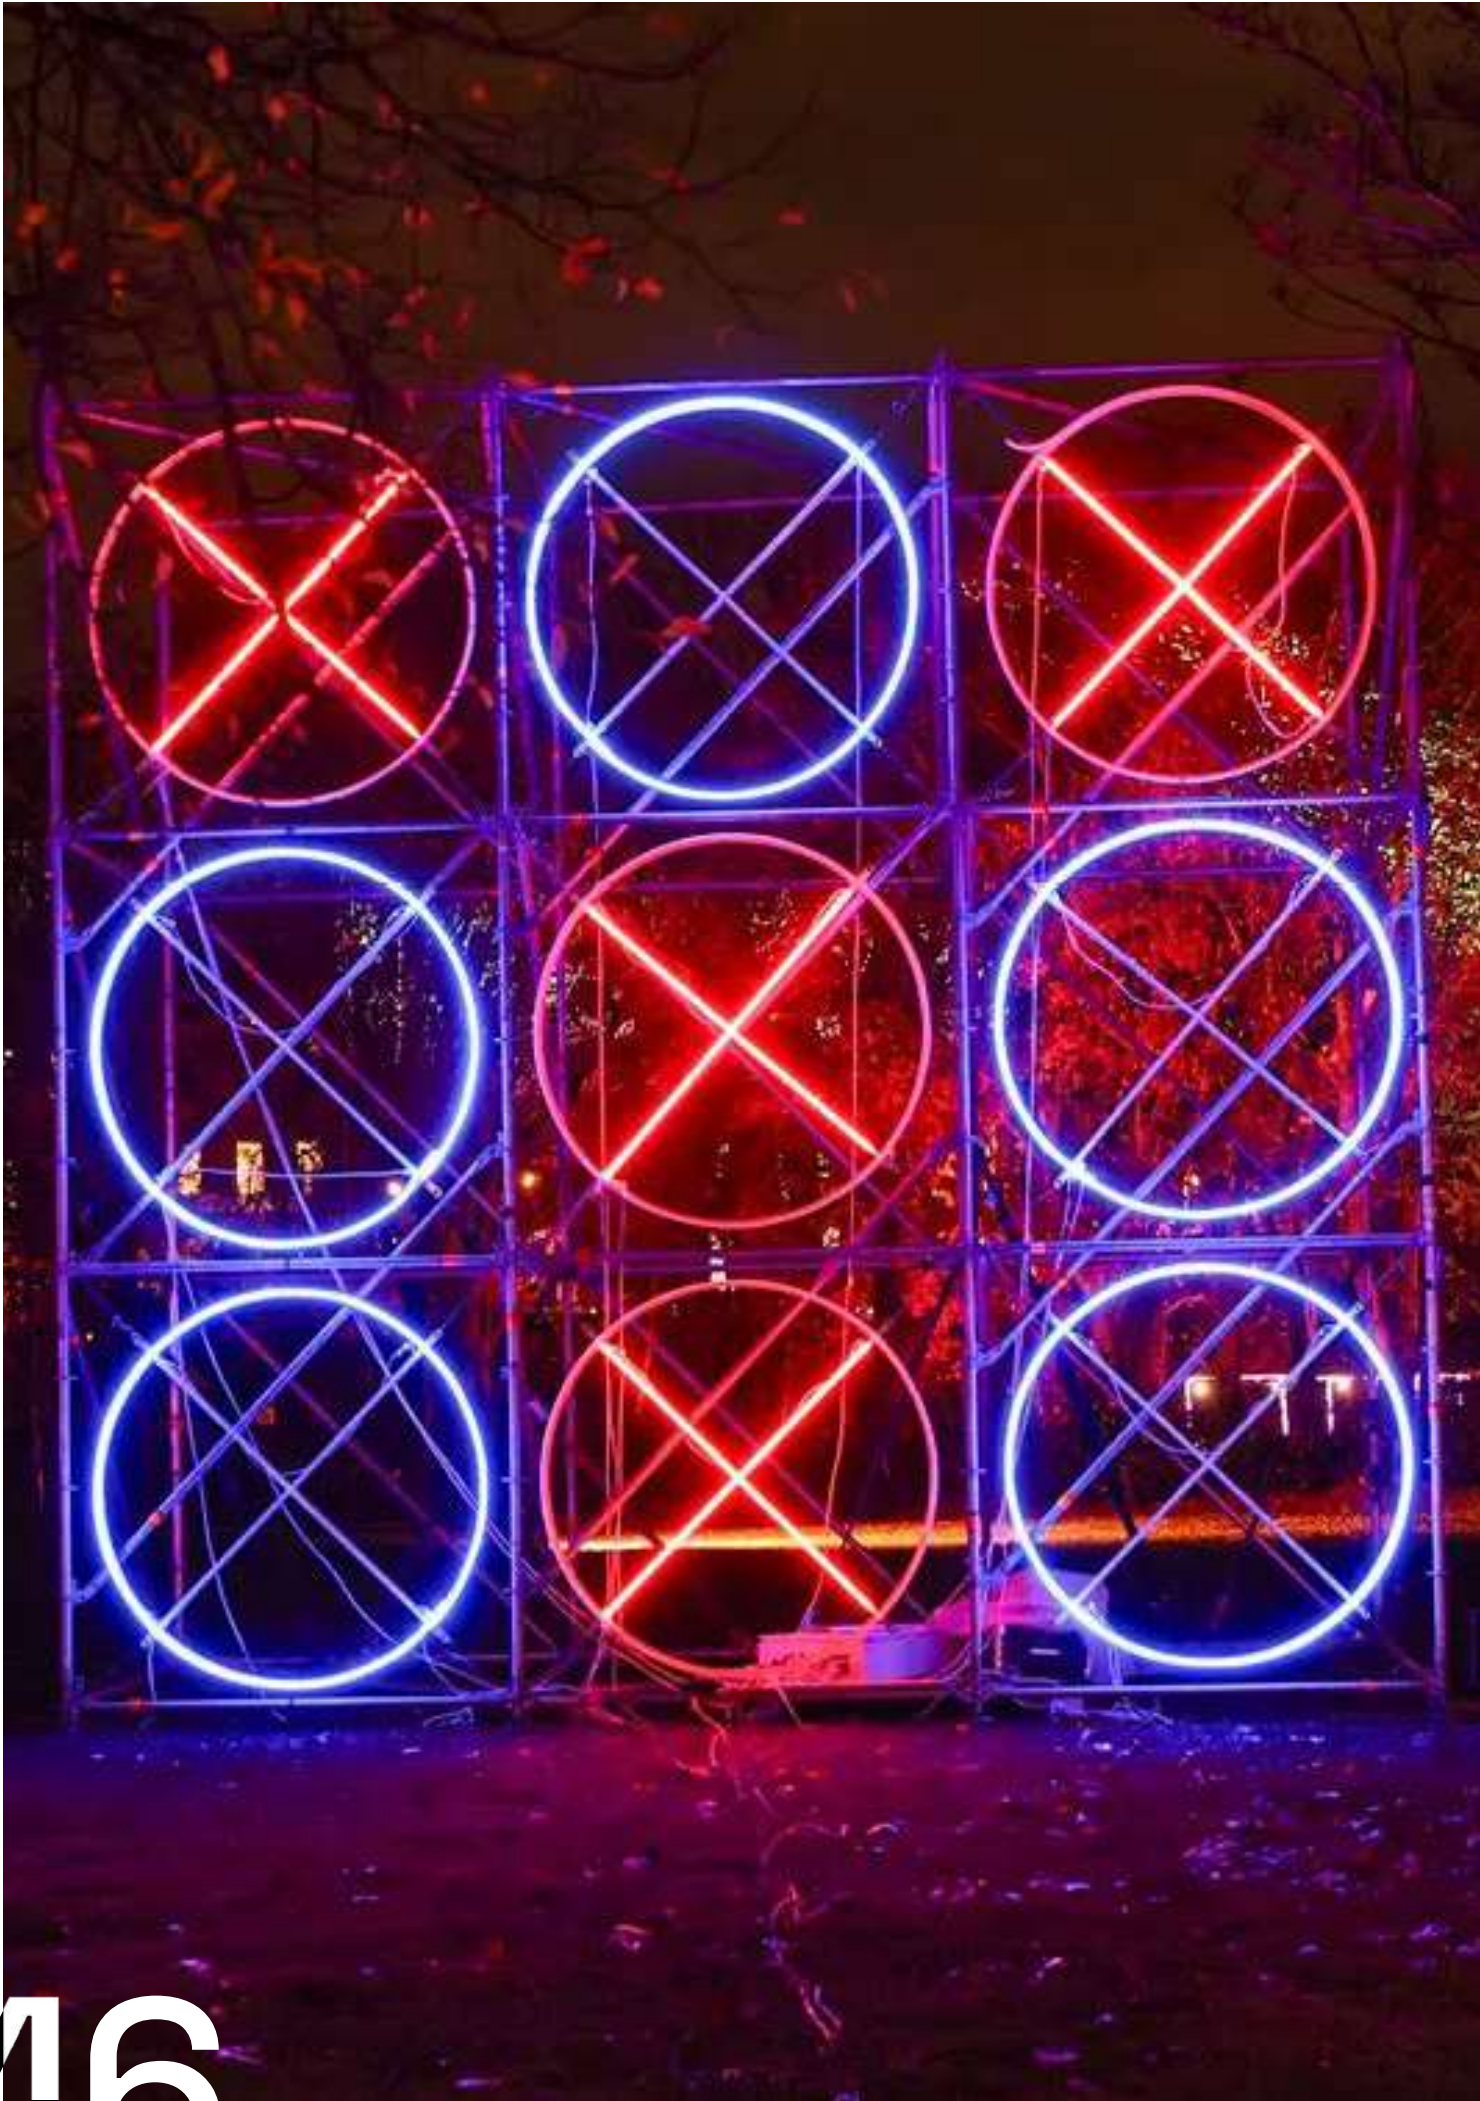


181



Scan for full info

DiGi Neonflex Side Bend

Key Specs	Tunable White	RGBW 3000K
Power Consumption (W/m)	10	18
LED quantity (per meter)	70	70
Pixels (per meter)	10	10

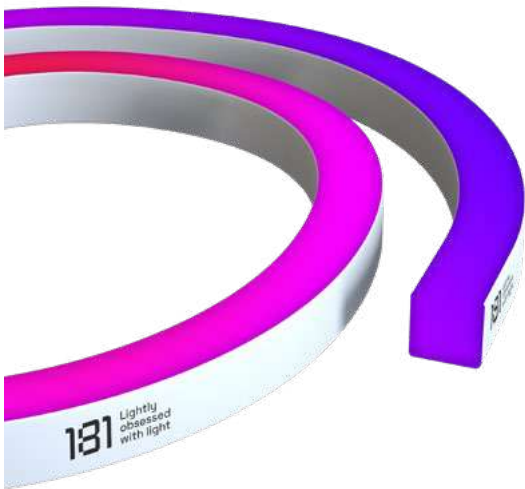


Color Range




Specifications



Beam Angle



Dimensions (in mm)

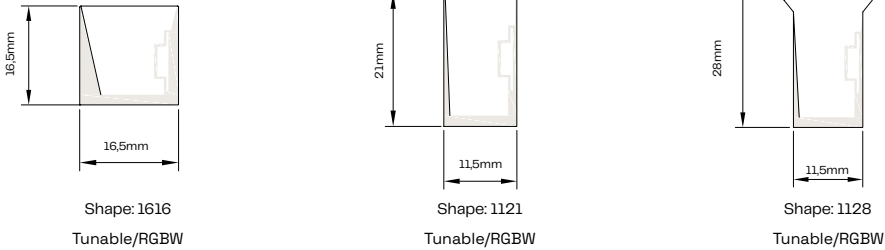

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Mounting

- Profile Straight
- Neonflex Profile Flex
- Mounting clip

116

117




181



Scan for full info

DiGi Neonflex Top Bend

Key Specs	Tunable	RGBW 3000K
Power Consumption (W/m)	10	18
LED quantity (per meter)	120	70
Pixels (per meter)	10	10

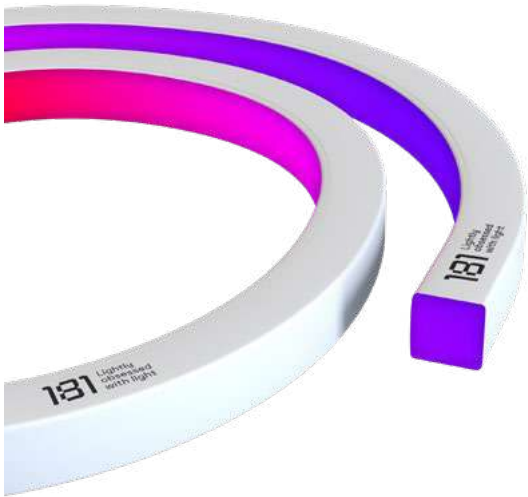


Color Range




Specifications



Beam Angle



Dimensions (in mm)

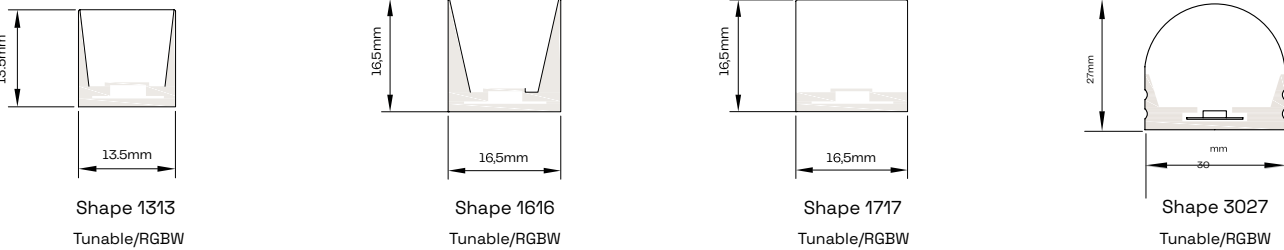

Related Items More available




131

Projectors & Linears

120

Washing & Grazing



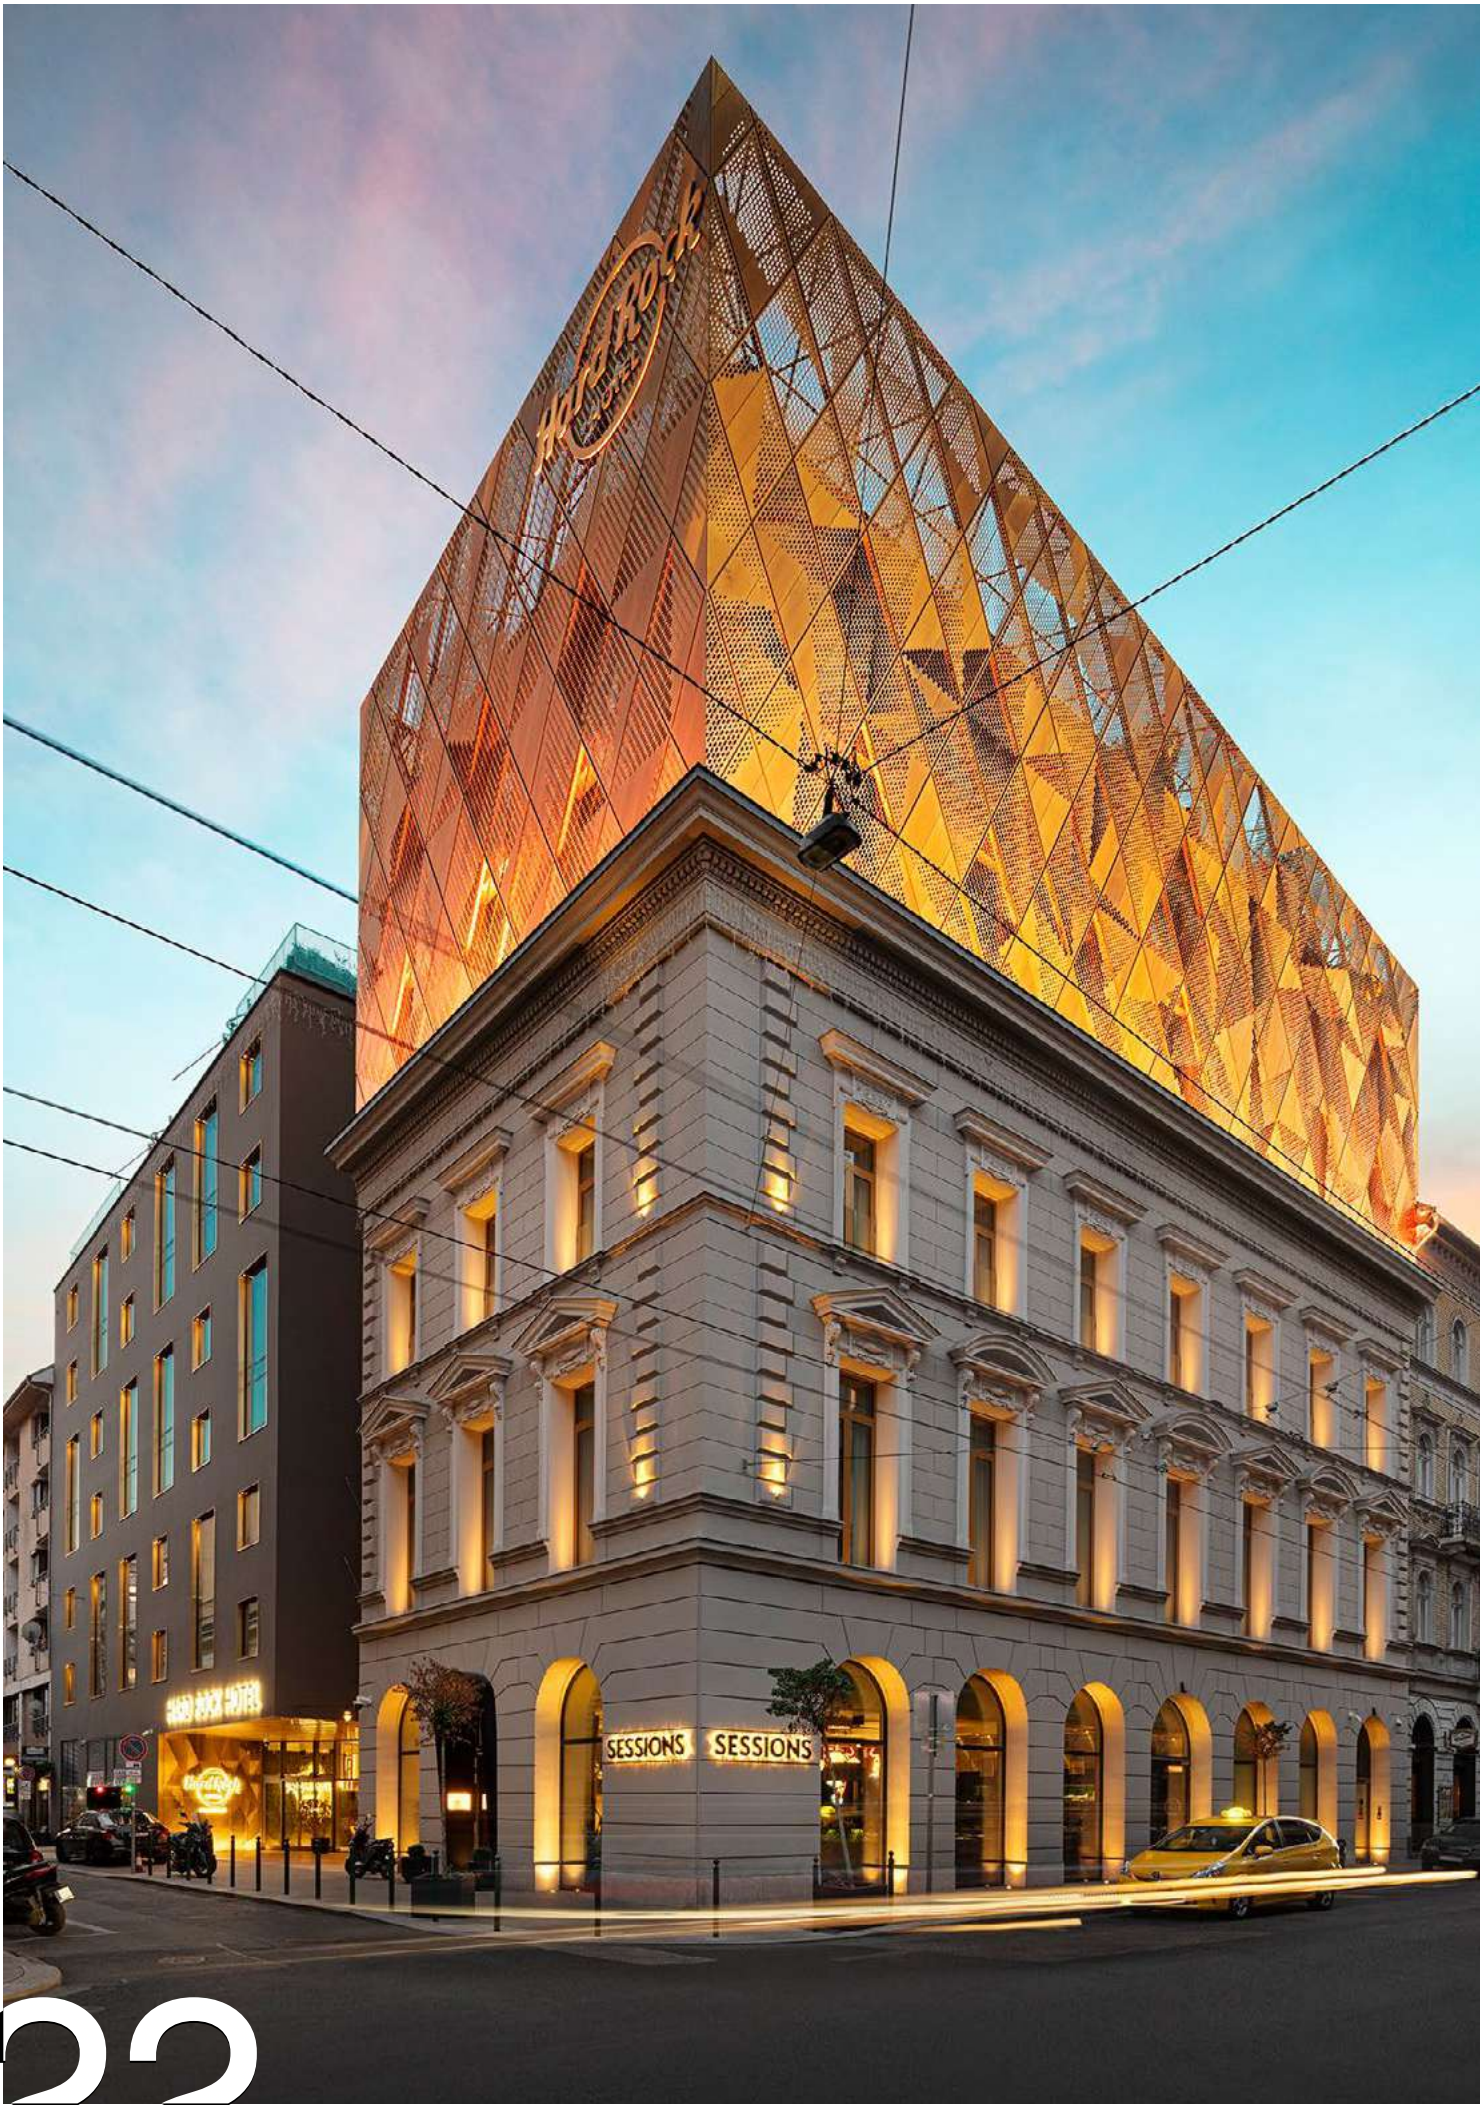

181



Scan for full info

Linear Window


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	12	12
Luminous Flux (lm)	341	309
LED quantity (per fixture)	10	10
CRI	≥80	≥80




Color Range



Beam Angle




Specifications

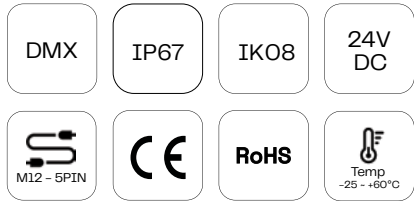


Housing Color



Dimensions (In mm)

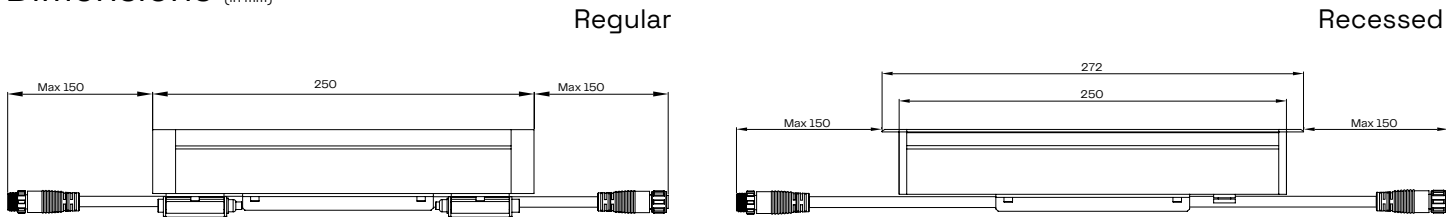

Related Items More available

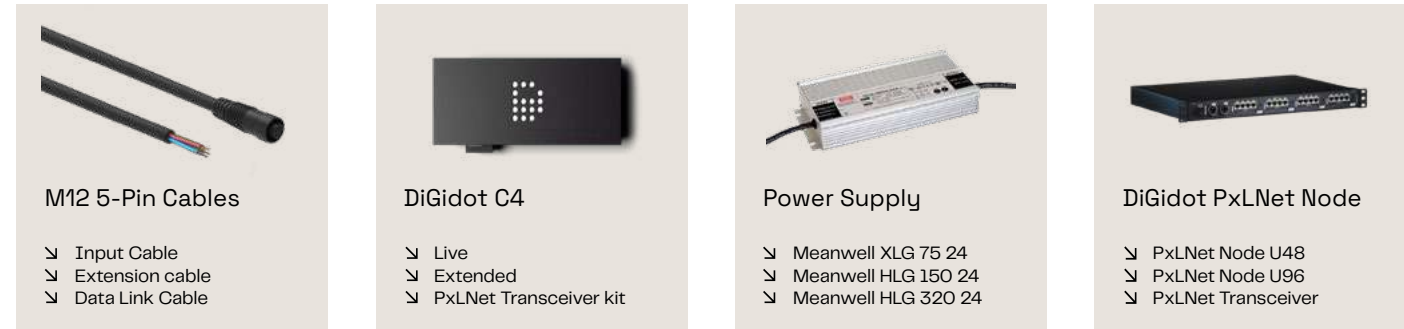



181



Scan for full info

Linear Flex


Key Specs	White	RGBW 3000K
Power Consumption (W/m)	32	32
LED quantity (per meter)	32	32
LEDs per pixel	4	4
Pixels (per meter)	8	8




Color Range



Beam Angle




Specifications

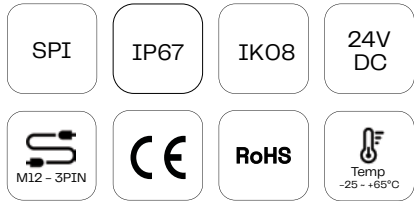

Housing Color



Dimensions (In mm)

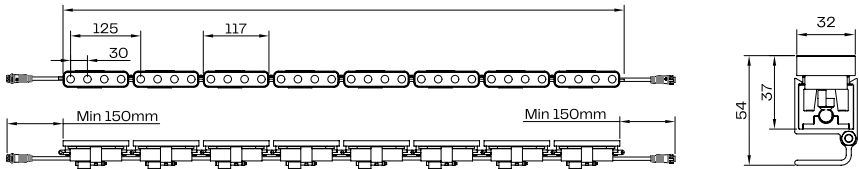

Related Items More available



M12 3-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 50 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



181



Scan for full info

Linear G18


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	18	18
Luminous Flux (lm)	1630	683
LED quantity (per fixture)	48	48



Color Range



Beam Angle

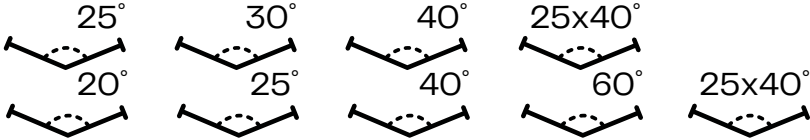

Specifications



Housing Color



Dimensions (In mm)



Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key




Scan for full info

Linear G24


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	24	24
Luminous Flux (lm)	2240	1025
LED quantity (per fixture)	24	18



Color Range



Beam Angle

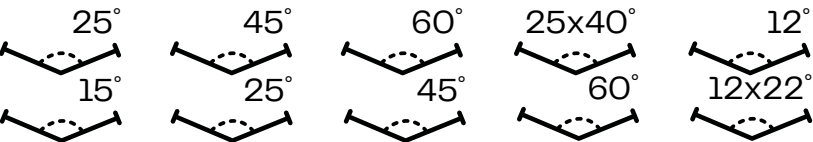


Specifications




Housing Color



Accessory



Dimensions (In mm)

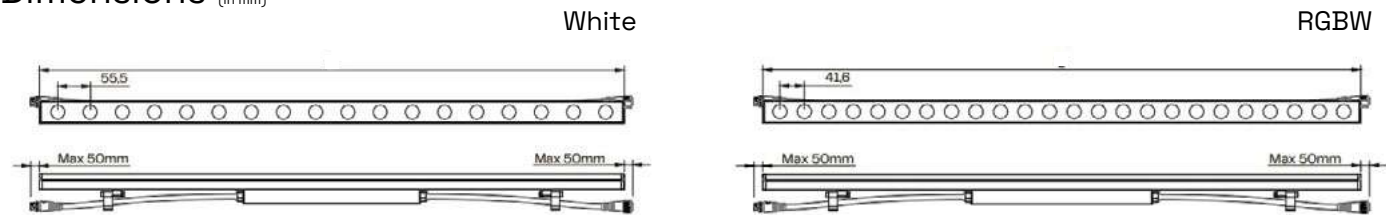

Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131



Scan for full info

Linear G36


Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	36	36	36
Luminous Flux (lm)	3011	3086	1470
LED quantity (per fixture)	36	36	18



Color Range



Beam Angle

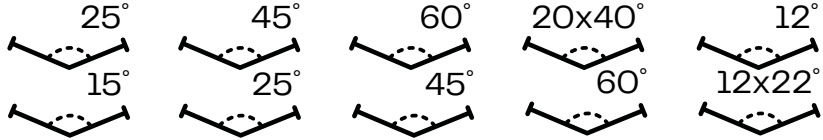



Specifications



Housing Color



Dimensions (in mm)

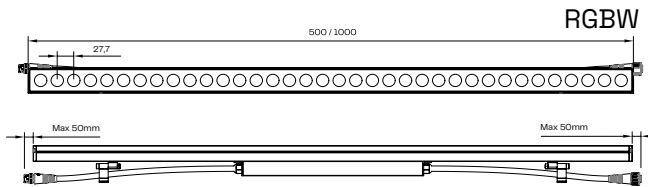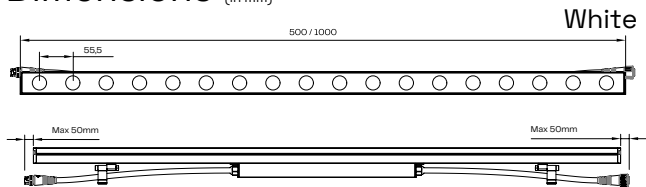

Related Items More available



M16 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

130

131



131



Scan for full info

Linear G54


Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	54	54	54
Luminous Flux (lm)	4517	4650	2217
LED quantity (per fixture)	36	36	36




Color Range



Beam Angle

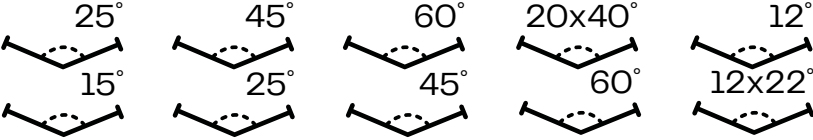


Specifications

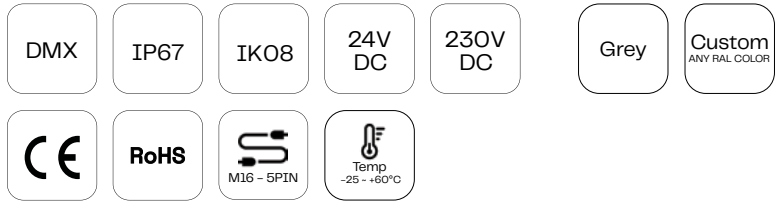

Housing Color

Dimensions (in mm)

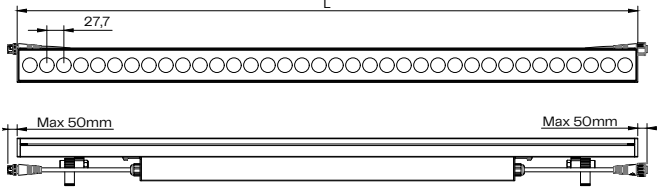

Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 320 24
- Meanwell HLG 480 24
- Meanwell HLG 600 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

132

133



Scan for full info

Linear G100


Key Specs	3000K	Tunable	RGBW 3000K
Power Consumption (W/m)	100	100	100
Luminous Flux (lm)	7227	6940	4428
LED quantity (per fixture)	24	24	24




Color Range



Beam Angle


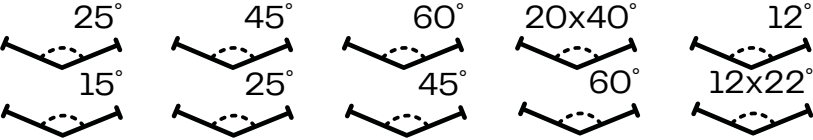


Specifications

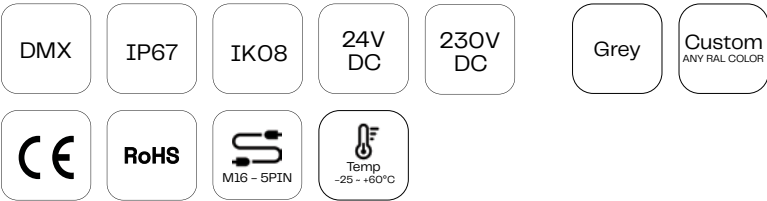

Housing Color

Dimensions (In mm)

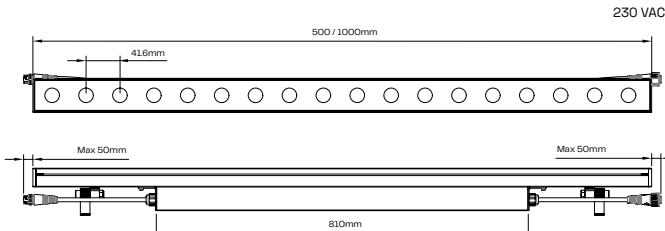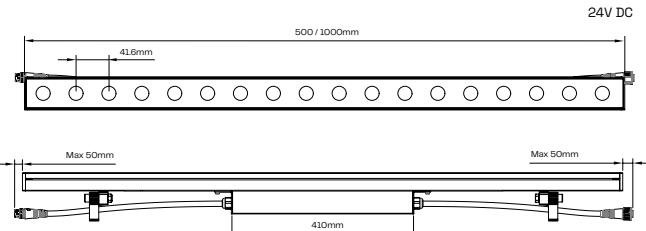

Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key



131



Scan for full info

Linear inground


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	54	54
Luminous Flux (lm)	3272	2217
LED quantity (per meter)	24	24



Color Range



Beam Angle



Specifications



Housing Color



Dimensions (in mm)



Related Items More available



M16 Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell XLG 75 24
- Meanwell XLG 100 24
- Meanwell HLG 150 24



MADRIX

- MADRIX Nebula
- MADRIX Software
- MADRIX Key

136

137



Scan for full info

Linear inground flex


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	54	54
Luminous Flux (lm)	3272	2217
LED quantity (per meter)	24	24




Color Range



Beam Angle




Specifications

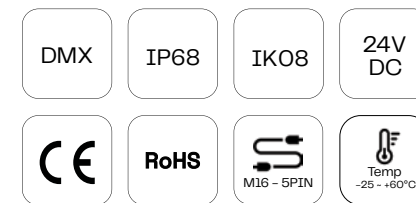



Housing Color




Dimensions (in mm)



Related Items More available



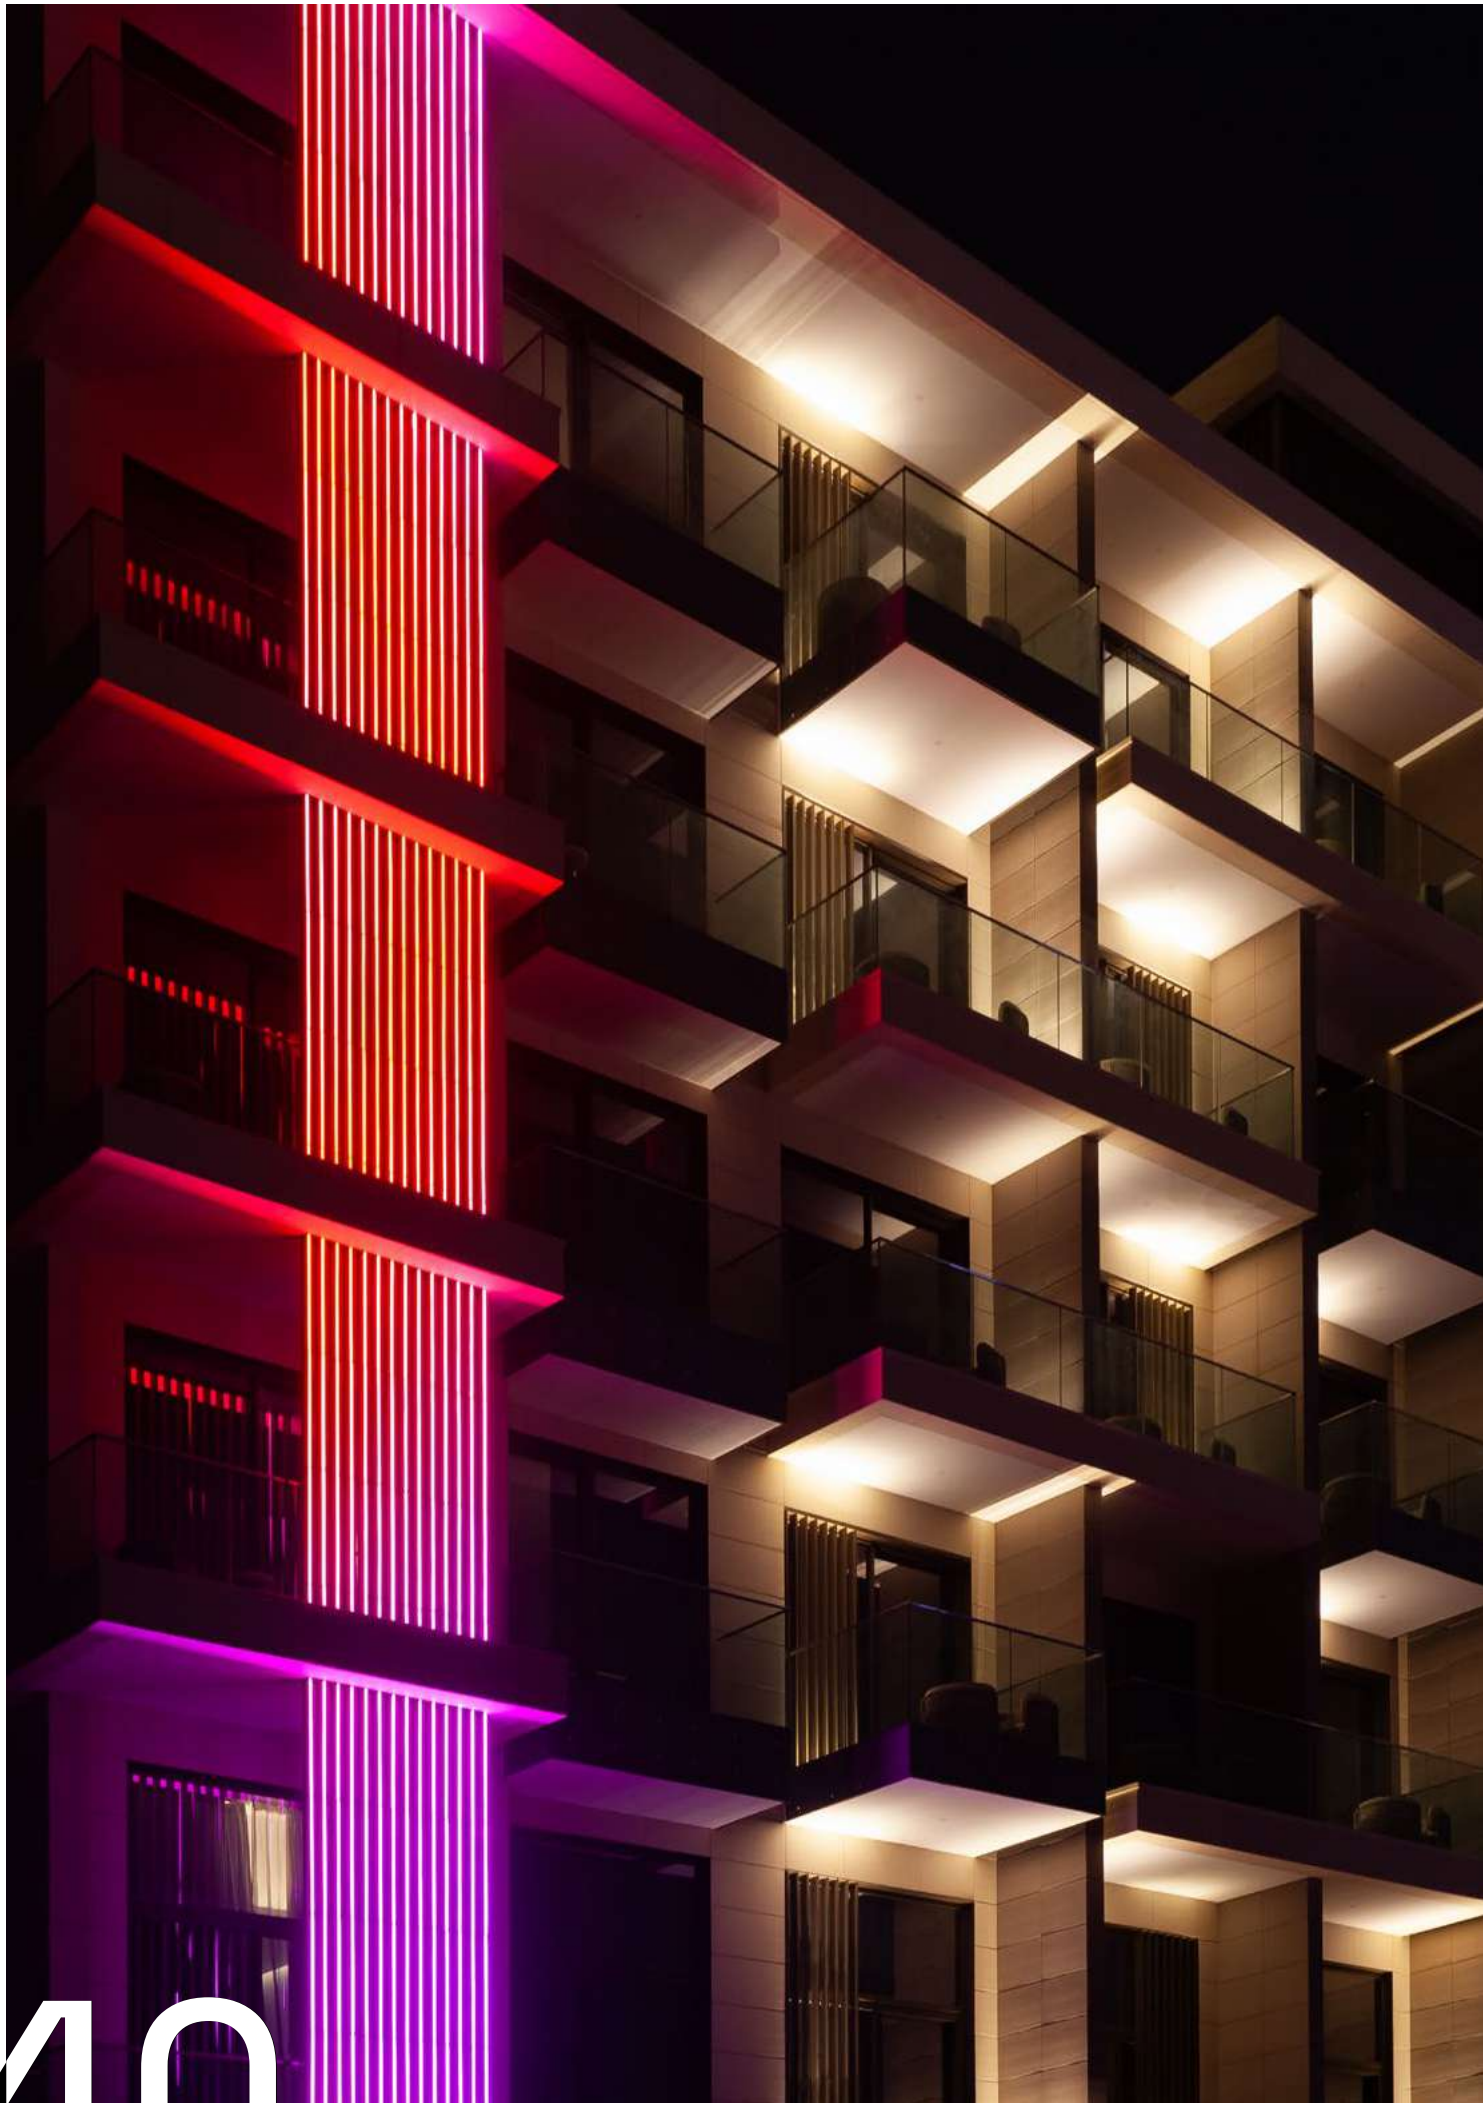

131



Scan for full info

Linear Soft Line


Key Specs	3000K	RGBW 3000K
Power Consumption (W/m)	24	24
Luminous Flux (lm)	1526	751
LED quantity (per meter)	80	80
CRI	≥80	≥80




Color Range



Beam Angle




Specifications

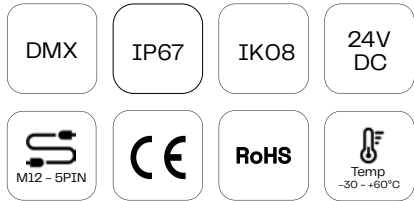

Housing Color



Dimensions (In mm)

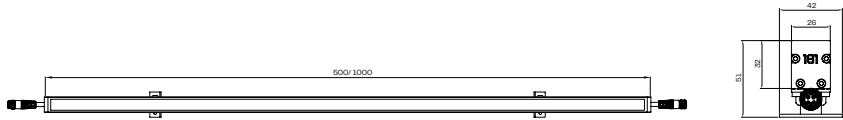

Related Items More available



M12 5-Pin Cables

- Input Cable
- Extension cable
- Data Link Cable



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 50 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



DiGidot PxLNet Node

- PxLNet Node U48
- PxLNet Node U96
- PxLNet Transceiver



181




Scan for full info

Linear Flex Silicon

Key Specs


Power Consumption (W/m)	18
LED quantity (per meter)	24
Luminous Flux (lm)	1044

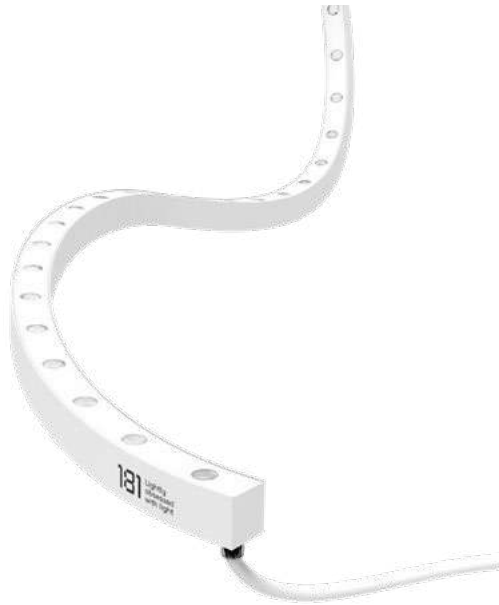


Color Range



Beam Angle






Specifications

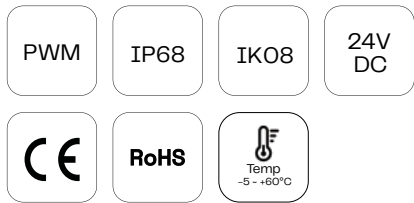



Housing Color



Dimensions (in mm)

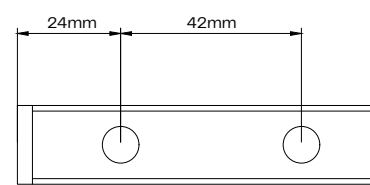

Related Items More available





131




Scan for full info

DiGi Linear Flex Silicon

Key Specs


Power Consumption (W/m)	23
LED quantity (per meter)	24
Pixels (per meter)	4
Luminous Flux (lm)	832

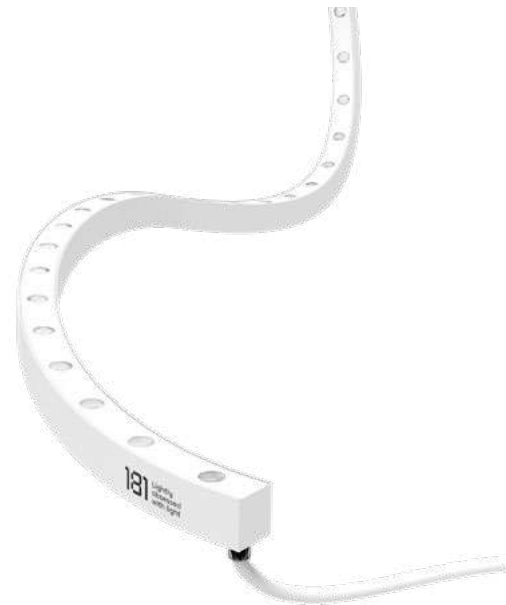


Color Range



Beam Angle






Specifications

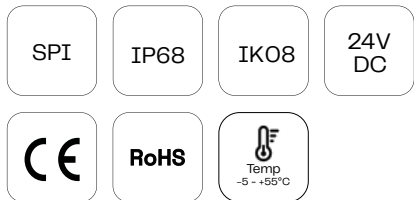


Housing Color



Dimensions (in mm)

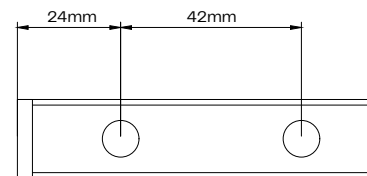


Related Items More available



131

Projectors & Linears

146

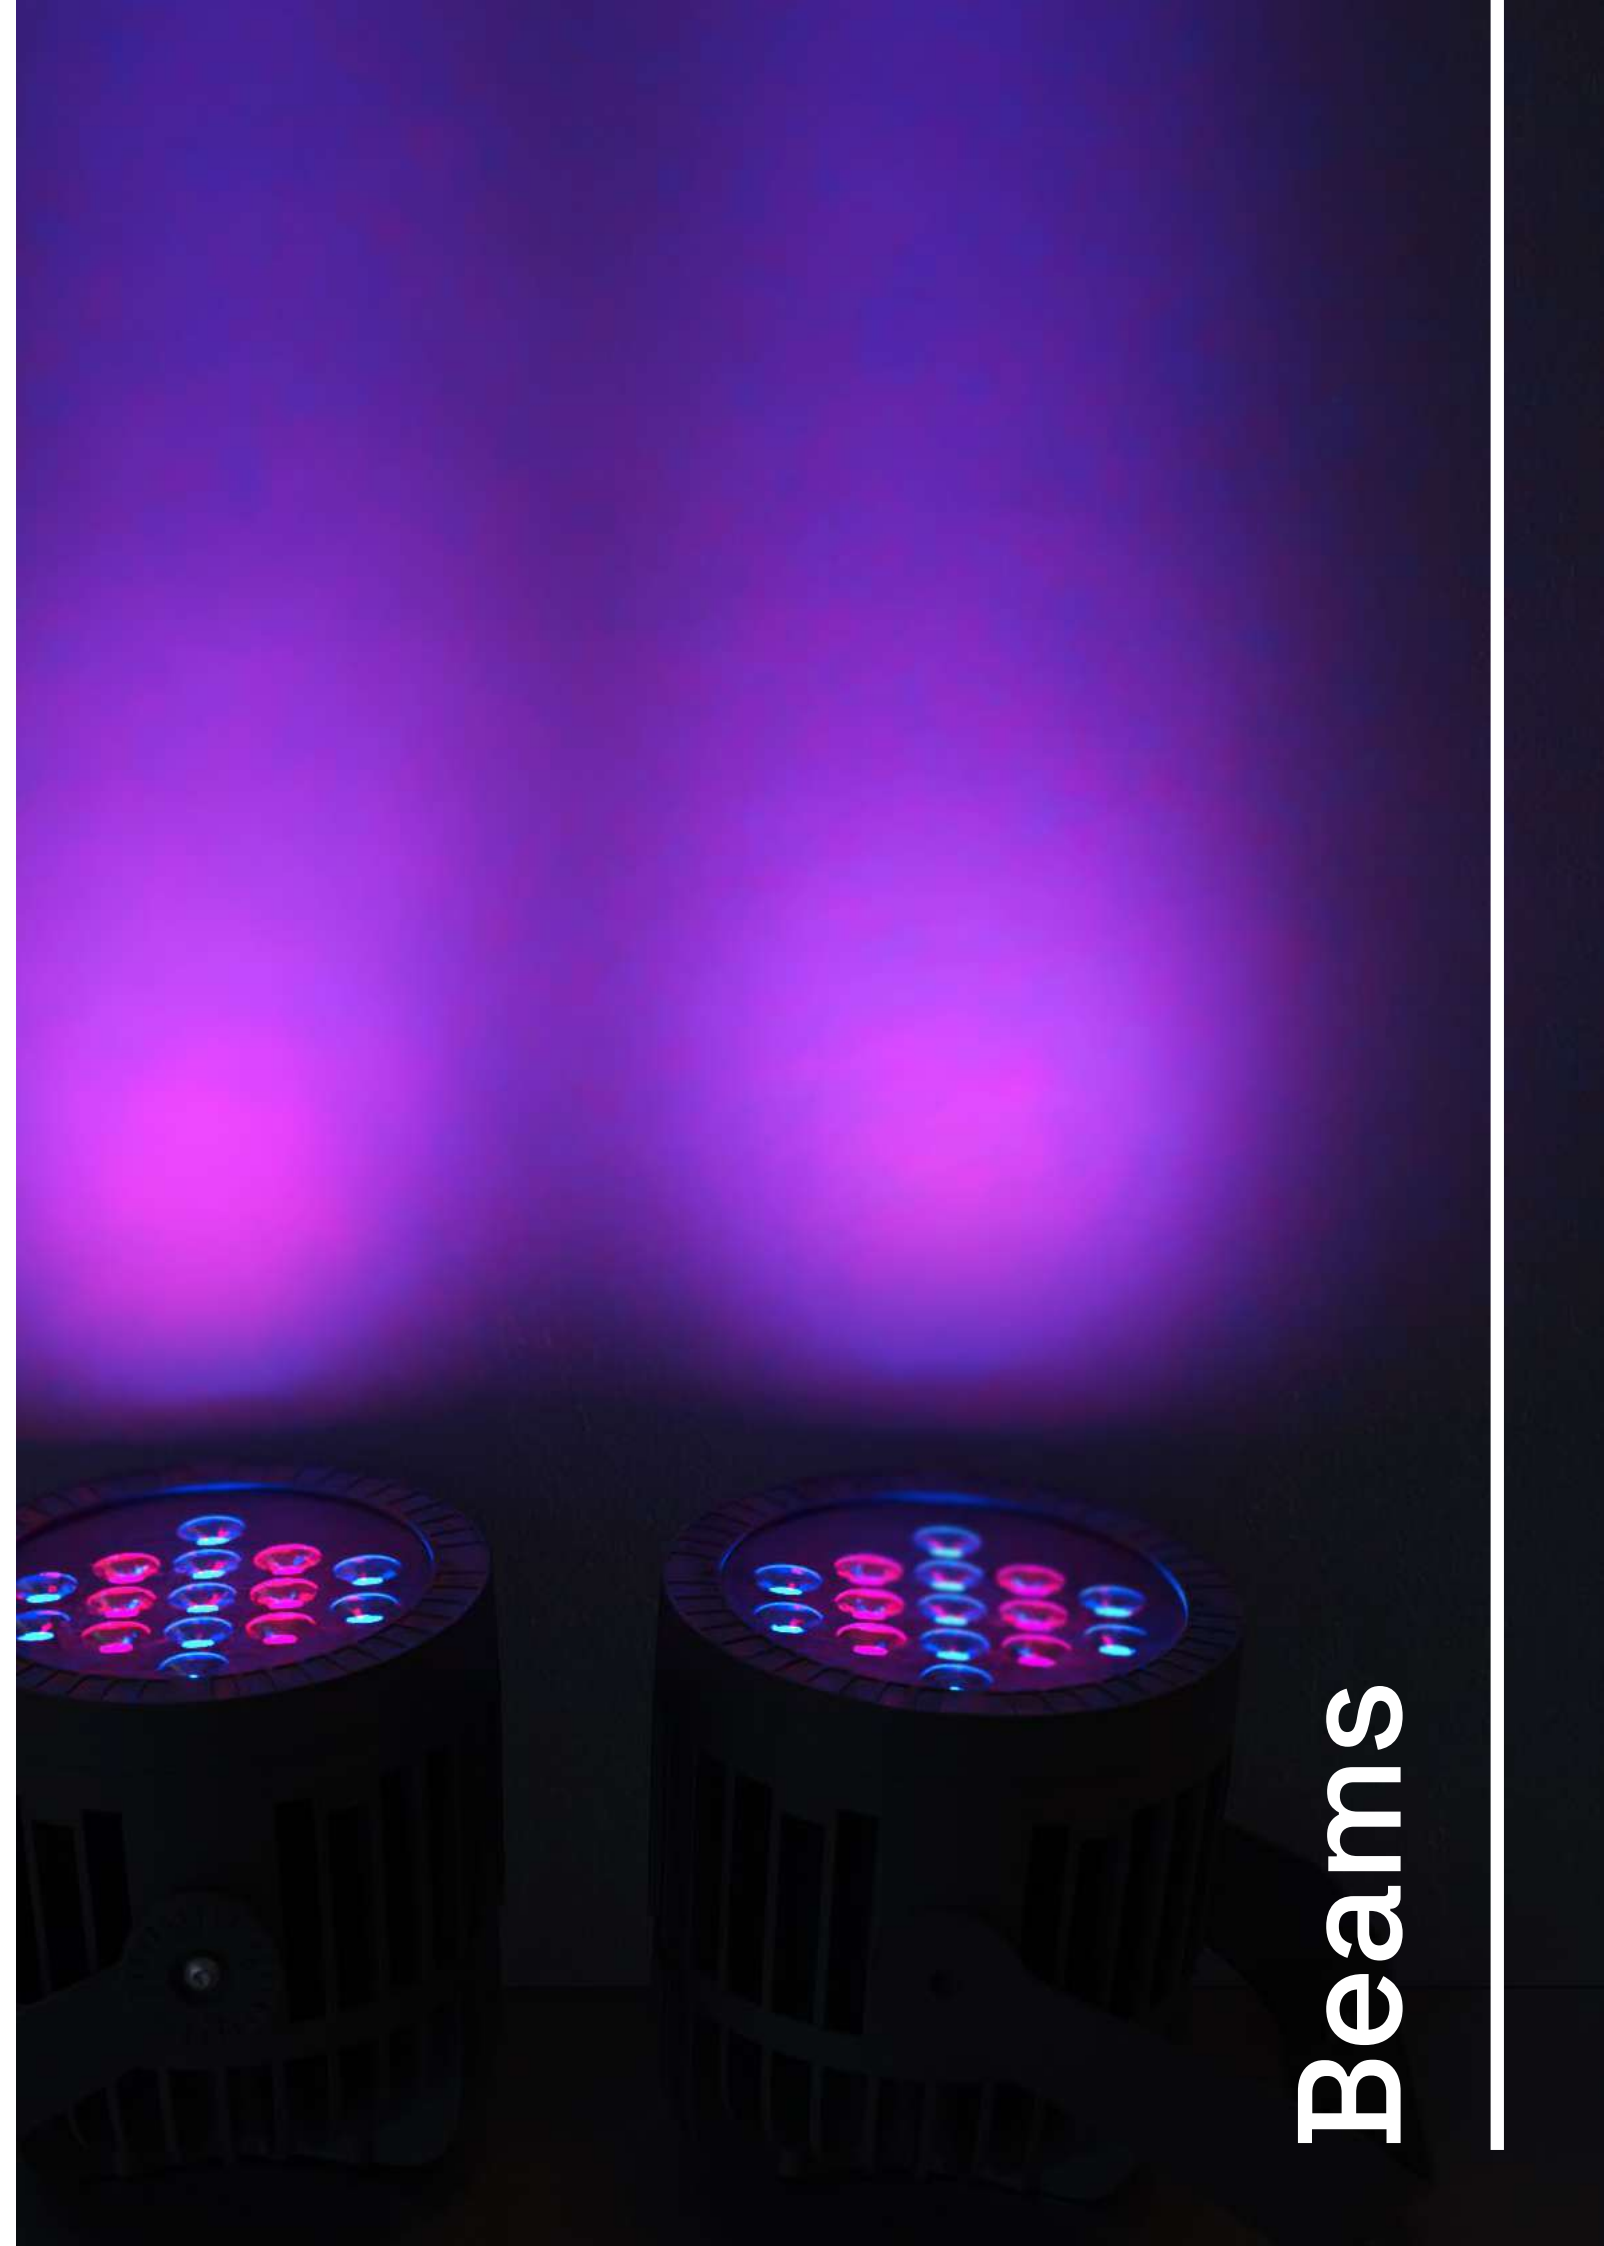

Beams



131



Scan for full info

Beam F12


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	12	12
Luminous Flux (lm)	1060	680
LEDs (per fixture)	6	6



Color Range




Beam Angle

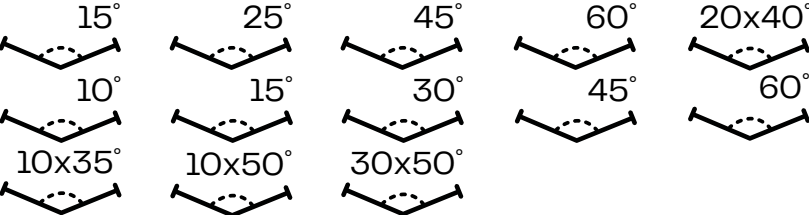

Specifications



Dimensions (in mm)



Beam 12W

Housing Color



Accessory



Related Items More available



Controller

- LED Touch Controller DMX/RF RGBW 4 Zones



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



M16 Cables

- Extension cable
- Input Cable
- Data Link Cable



131



Scan for full info

Beam F36


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	36	36
Luminous Flux (lm)	3182	2045
LEDs (per fixture)	24	24



Color Range




Beam Angle

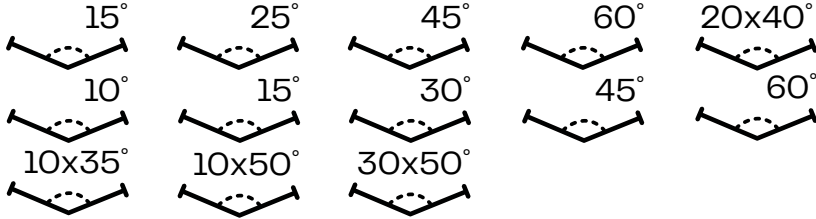

Specifications



Dimensions (in mm)



Beam 36W

Housing Color



Accessory



Related Items More available



Controller

- LED Touch Controller DMX/RF RGBW 4 Zones



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit




Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

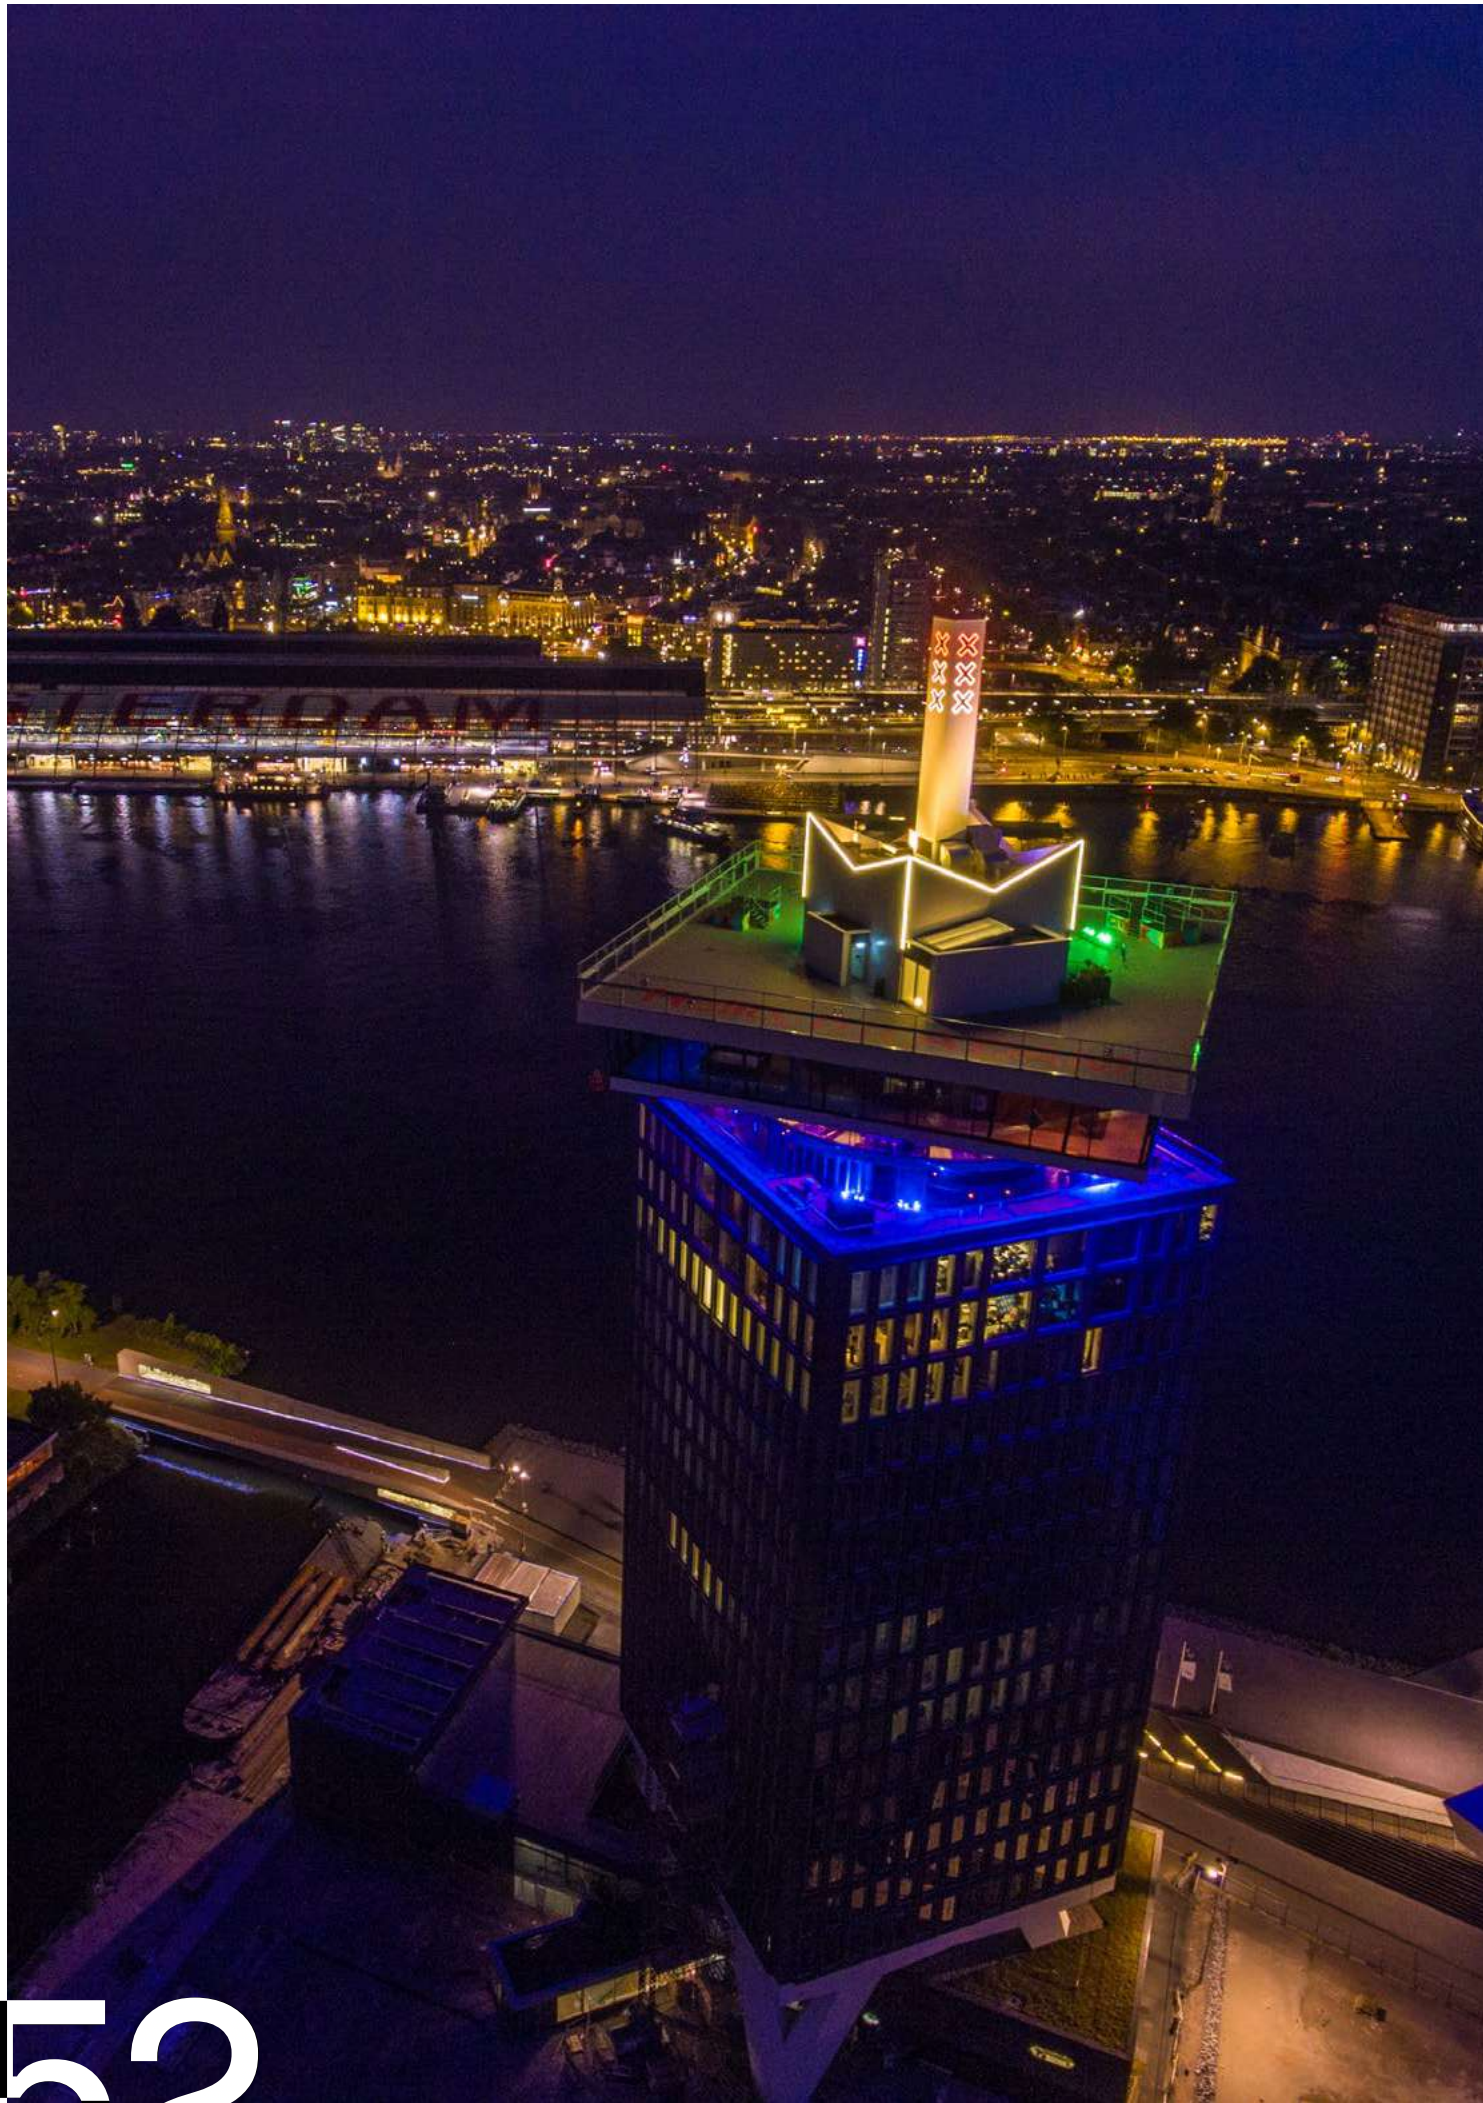

131



Scan for full info

Beam F54


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	54	54
Luminous Flux (lm)	4883	2961
LEDs (per fixture)	24	24




Color Range




Beam Angle

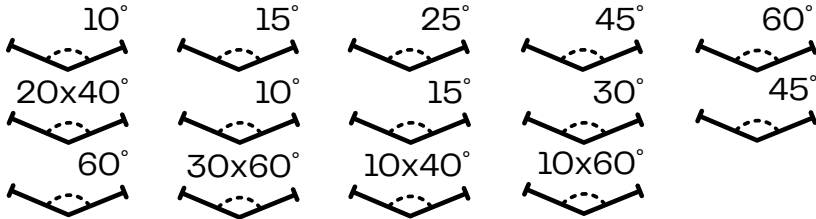

Specifications

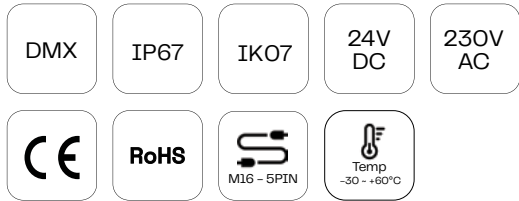

Dimensions (In mm)



Beam 54W

Housing Color



Accessory



Related Items More available

Controller

- LED Touch Controller DMX/RF RGBW 4 Zones

DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit

Power Supply

- Meanwell HLG 150 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable



131



Scan for full info

Beam F72


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	72	72
Luminous Flux (lm)	5740	3607
LEDs (per fixture)	36	36




Color Range




Beam Angle

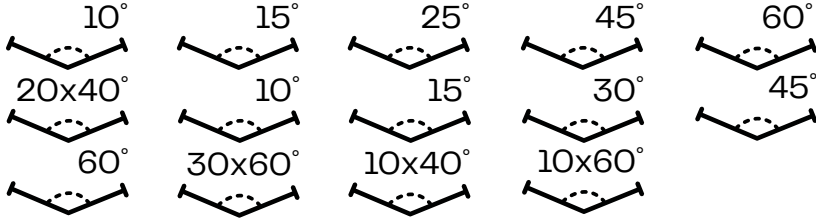

Specifications

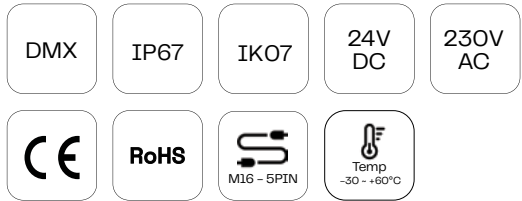

Dimensions (in mm)



Beam 54W

Housing Color



Accessory



Related Items More available

Controller

- LED Touch Controller DMX/RF RGBW 4 Zones

DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit

Power Supply

- Meanwell XLG 75 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24

M16 Cables

- Extension cable
- Input Cable
- Data Link Cable



131



Scan for full info

Beam F120


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	120	120
Luminous Flux (lm)	11436	7148
LEDs (per fixture)	48	48



Color Range




Beam Angle

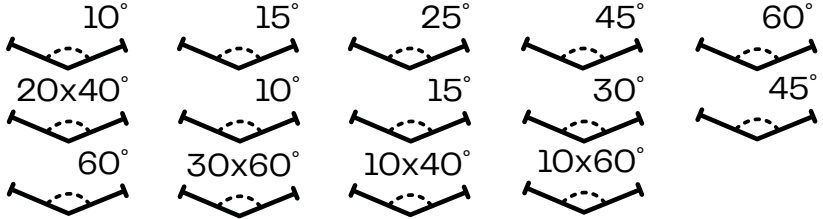

Specifications



Dimensions (in mm)



Housing Color



Accessory



Related Items More available



Controller

- LED Controller DMX/RF



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply

- Meanwell XLG 75 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



M16 Cables

- Extension cable
- Input Cable
- Data Link Cable



131



Scan for full info

Beam F250


Key Specs	3000K	RGBW 3000K
Power Consumption (W)	250	250
Luminous Flux (lm)	23828	14893
LEDs (per fixture)	120	120



Color Range




Beam Angle

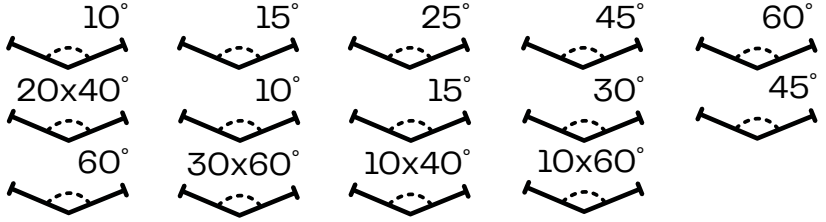

Specifications



Dimensions (in mm)



Housing Color



Accessory



Related Items More available



Controller

- LED Controller DMX/RF



DiGidot C4

- Live
- Extended
- PxLNet Transceiver kit



Power Supply


- Meanwell XLG 75 24
- Meanwell HLG 240 24
- Meanwell HLG 320 24



M16 Cables

- Extension cable
- Input Cable
- Data Link Cable

MADRIX LIGHTING CONTROL

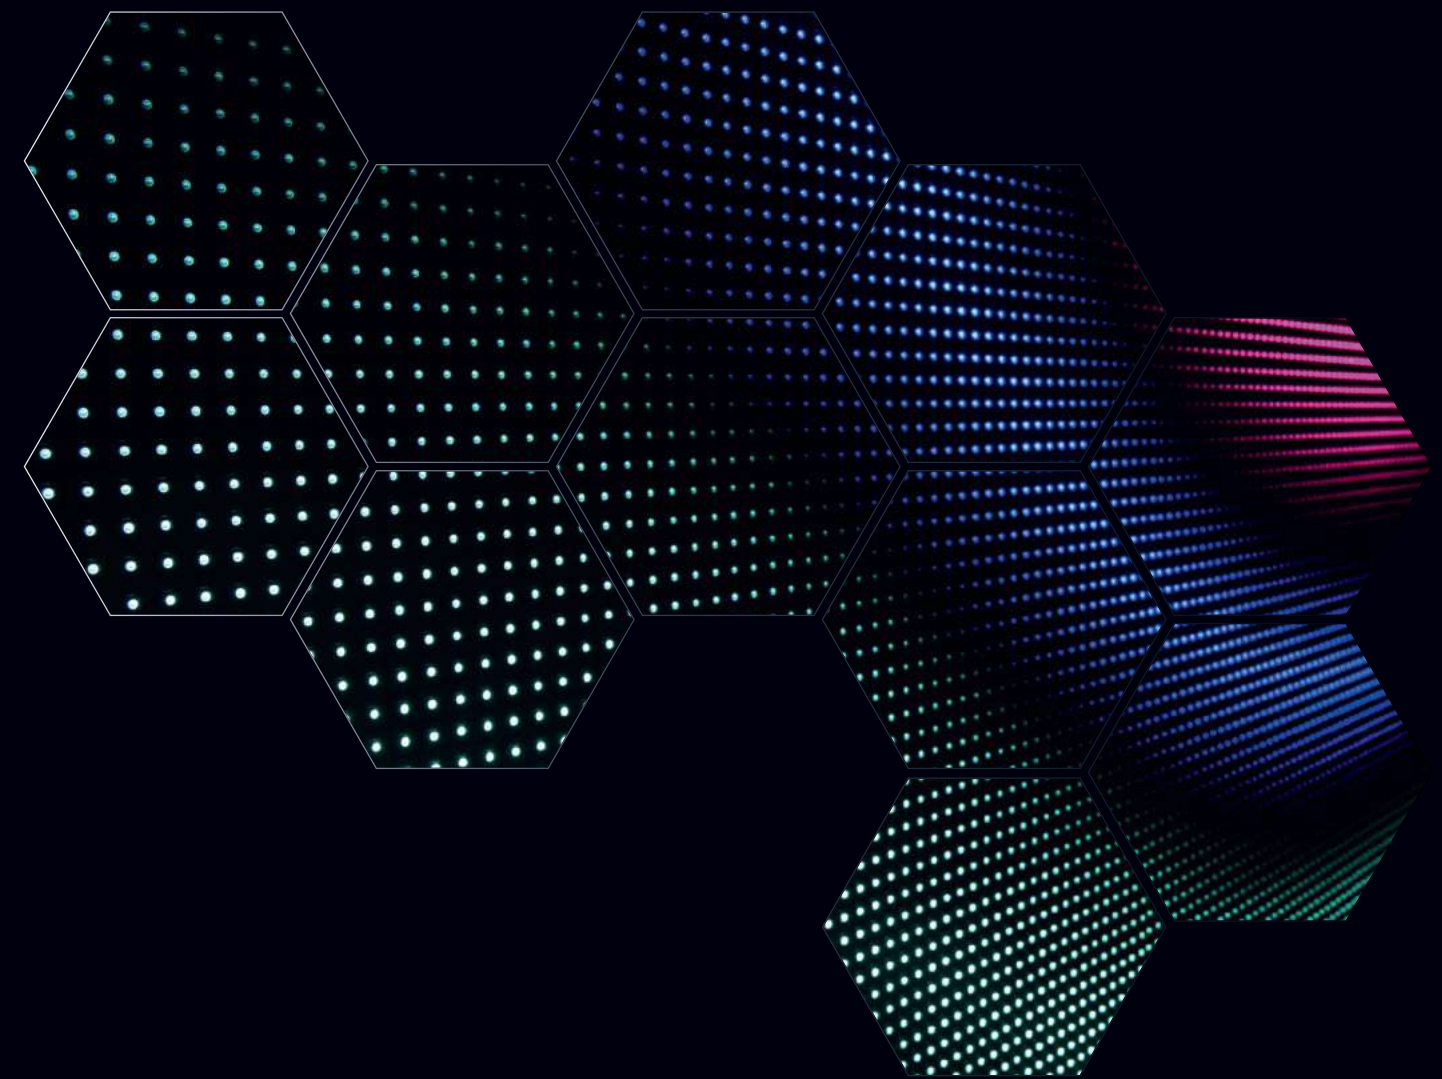

Discover extraordinary lighting and reliable control.

Dynamic visuals, colorful effects, or static elegance —
A creative vision and stunning lighting design ultimately require the right solutions.

The MADRIX® range of software and hardware solutions includes state-of-the-art tools for easy configuration, automatic health monitoring, and creative lighting control.

All around the world amazing LED projects are brought to life in entertainment, live productions, and architainment thanks to high-quality, professional products made in Germany.

CREATIVE • DYNAMIC • RELIABLE

5

MADRIX® 5 is the ultimate control tool for your LED lighting. Use pixel mapping at its best in 2D or 3D.

An award-winning software, and so much more. It is a tool for generative visuals and effects, and leading LED-lighting controller since 2005.

It makes your stunning LED-lighting designs possible.




 Made in Germany

www.madrix.nl

DiGidot

PUSHING CONTROL BOUNDARIES

The DiGidot ecosystem simplifies lighting control by replacing multiple devices and cables with a single black box. Additional features can be added to customize the solution for any situation.

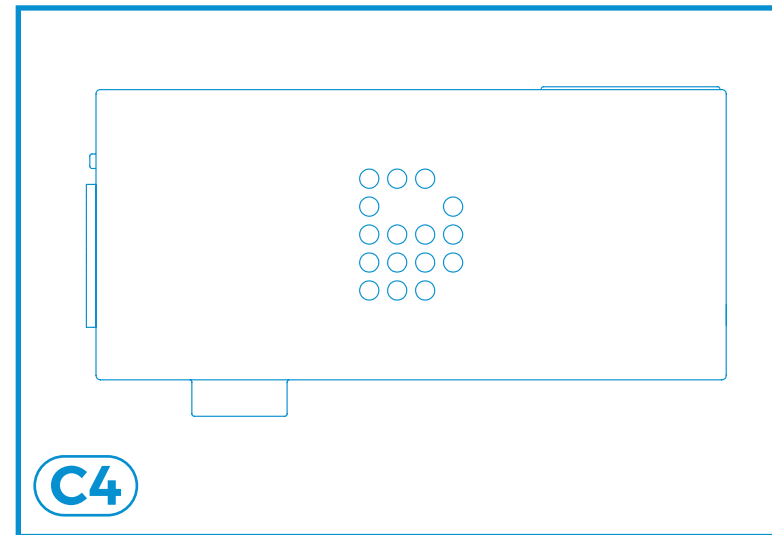

Innovative

Pixelating surfaces, beyond just color and brightness control.

Reliable

Hardware for 24/7 use, upgradable components for enhanced maintenance

Versatile

Easy scalability, from small-scale events to large-scale installations.

Industry standards

Compatible with a range of industry standards, including Large range of industry standards such as DMX, Art-Net and sACN. Easy to integrate.

Easy to use

Intuitive interface, plug-and-play setup and remote management. Easy to set up, control, and manage.

Dedicated team

Extensive technical support from embedded developers in the Netherlands

Always up-to-date

Free online or offline firmware updates.

Full solution for pixel controlled projects

DiGidot Hardware

C4 Live with NFC Coming soon
C4 Extended with NFC
PxLNet Node
PxLNet Extenders
PxLNet Smart Receiver Coming soon
PxLNet Smart Receiver Din-rail
PowerNode

DiGidot Software

Web interface
App
Upgrades
Updates

DiGidot Cloud

Coming soon
Connect (IoT Bridge)



Amsterdam Office

+31 (0) 20 82 00 170
sales@oneeightyone.com

Bromostraat 18
1067 TG Amsterdam
The Netherlands

Dubai Office

+97 1 5 05 87 00 99
dubai@oneeightyone.com

Donna Tower, Office 1608
Dubai Silicon Oasis
Dubai, United Arab Emirates