




PRIVATE RESIDENCE GREECE

   **reddot winner 2023**



OPTIONAL

cover plate adapter for concrete housing			
CODE			
	W900194B0		




1.0

LED PCB 5W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

CODE			
	WL174184WW_		
	WL174184BM_		
	WL174184BB_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5




2.0

LED PCB 8W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

CODE			
	WL174284WW_		
	WL174284BM_		
	WL174284BB_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	675 >90	3
3000K	730 >90	5



3.0

LED PCB 10W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

CODE			
	WL174384WW_		
	WL174384BM_		
	WL174384BB_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	900 >90	3
3000K	975 >90	5

FINLIN

Ceiling surface



205



343 | 349



373



FINLIN

Ceiling suspended






135



343 | 349



373



1.0

LED PCB 5W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

2.0

LED PCB 8W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

3.0

LED PCB 10W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

OPTIONAL

cover plate adapter for concrete housing

CODE
W900194B0

CODE
WL270184BM
WL270184BB

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5

CODE
WL270284BM
WL270284BB

LIGHT COLOUR	LUMEN CRI	CODE
2700K	675 >90	3
3000K	730 >90	5

CODE
WL270384BM
WL270384BB

LIGHT COLOUR	LUMEN CRI	CODE
2700K	900 >90	3
3000K	975 >90	5



back



OFFICE COPTHALL BRIDGE HOUSE | EKHO STUDIO HARROGATE | UNITED KINGDOM




DESIGN
AWARD
2024



reddot winner 2023

FINLIN

Wall surface

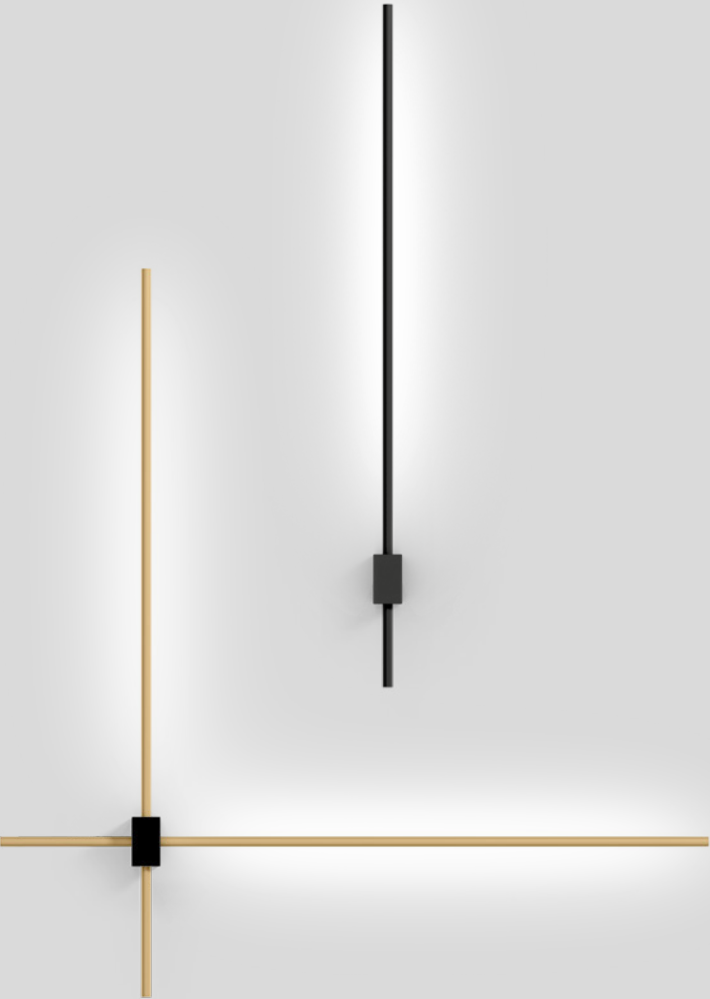

OPTIONAL

spacer 10mm for overlapping

	CODE
	W900195B0

specs on page 467




1.0

LED PCB 6W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CODE
	WL370584BM_
	WL370584BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5



4.0

LED PCB 11W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CODE
	WL370884BM_
	WL370884BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5



PASTRY SHOP DONATIEN MAÎTRE ECLAIR | STUDIO CARRÉ - PAUL LEVAILLANT PARIS | FRANCE

if DESIGN AWARD 2024
reddot winner 2023



OPTIONAL

spacer 10mm for overlapping

	CODE
	W900195B0

specs on page 467

2.0

LED PCB 11W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CODE
	WL370684BM_
	WL370684BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5

3.0

LED PCB 11W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CODE
	WL370784BM_
	WL370784BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5

FINLIN

Wall surface



135



205




373



FINLIN

Wall surface



1.0 ROUND

LED PCB 14W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K



OPTIONAL

spacer 10mm for overlapping

 **W900196B0**

specs on page 467

CODE	
	WL371184BM_
	WL371184BB_

CODE	LIGHT COLOUR	LUMEN CRI	CODE
	2700K	1180 >90	3
	3000K	1280 >90	5

 back



FINLIN

Floor



135



205



343 | 349



1.0


LED PCB 16W | dimmable
100-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable with dimmer switch

IP20 0°-10°|360° L80|50K

2700K | CRI >90 | 1360lm

CODE
470184W3
470184B3

PLUG TYPE	CODE
EU/C	W ...
INT incl. A	WL ...



back