



LECA

Ceiling recessed



111



169



291



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L80|50K

wire springs 40-41 4-26

2700K | CRI >90 | 585lm

CODE

	W188161W3
	W188161Q3
	W188161B3

ALWAYS USE

driver | 350mA | 110-240VAC

CODE

6.3W	W90213303
8W phase cut TE	W90223303

more options and specs on page 460



OPTIONAL





honeycomb louver

CODE

	W915230B0
--	-----------



reddot winner 2024



OPTIONAL

honeycomb louver

CODE
W915230B0

1.0

LED COB 8W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-31° L80|50K

2700K | CRI >90 | 585lm

CODE
WL188264W3
WL188264Q3
WL188264B3

2.0

LED COB 13W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-31° L80|50K

2700K | CRI >90 | 2x500lm

CODE
WL188364W3
WL188364Q3
WL188364B3

4.0

LED COB 25W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium


⊕ IP20 0°-90°|350° ⚡ M-31° L80|50K

2700K | CRI >90 | 4x500lm

CODE
WL188464W3
WL188464B3

LECA


Ceiling surface



83



169



291

back



PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS

LECA on STREX

48V system

1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|350° M-3P 180|50K

non dim

	CODE
	W188662W_
	W188662BQ_
	W188662B_

DALI-2

	CODE
	W188665W_
	W188665BQ_
	W188665B_

OPTIONAL


honeycomb louver

	CODE
	W915230B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	585 >90	3
3000K	620 >90	5

back

WEVER & DUCRÉ 168 – 169

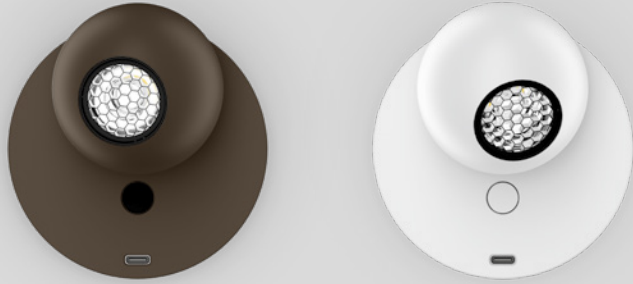

LECA snooze

Wall recessed



83



111



169



1.0 SEMI RECESSED

LED COB 5W | 100-277VAC
50-60Hz incl. driver
aluminium
incl. switch on / off / dim button
USB-C port | incl. honeycomb


⊕ IP20 0°-90°|350° ⚡ N-17° L80|50K

⌚ 68-71 ⚡ 5-40

2700K | CRI >90 | 240lm

CODE

	WL188544W3
	WL188544Q3
	WL188544B3



USB-C