

1.0

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate

IP20 M-39° L80|50K

wire springs 36x39 4-28

	CODE
	W109461WW_
	W109461BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	140	>90	3
3000K	145	>90	5

ALWAYS USE

driver | 350mA | 110-240VAC

	CODE
3.3W	W90213203
4.2W phase cut TE	W90223302

more options and specs on page 460

2.0

LED PCB 4.2W | 350mA | 12V
aluminium | polycarbonate

IP20 M-39° L80|50K

wire springs 36x67 4-28

	CODE
	W109561WW_
	W109561BB_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x140	>90	3
3000K	2x145	>90	5

ALWAYS USE

driver | 350mA | 110-240VAC

	CODE
6.3W	W90213303
4.2W phase cut TE	W90223302

more options and specs on page 460





LINOO





Ceiling surface



51



52

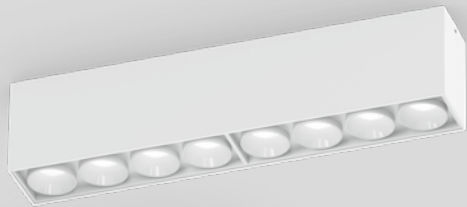

4.0

LED PCB 10W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | polycarbonate

⊕ IP20 $\angle$ M-39° L80|50K

		CODE	
		WL109664WW_	
		WL109664WB_	
		WL109664QB_	
		WL109664BB_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x140 >95	3
3000K	4x145 >95	5

4.1

LED PCB 10W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | polycarbonate

⊕ IP20 $\angle$ M-39° L80|50K

		CODE	
		WL109764WW_	
		WL109764WB_	
		WL109764QB_	
		WL109764BB_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x140 >95	3
3000K	4x145 >95	5

8.0

LED PCB 19W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium | polycarbonate

⊕ IP20 $\angle$ M-39° L80|50K

		CODE	
		WL109864WW_	
		WL109864WB_	
		WL109864QB_	
		WL109864BB_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	8x140 >95	3
3000K	8x145 >95	5

UGR ≤ 16
65° ≤ 3000cd

back