



RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN TIELT | BELGIUM

 **DESIGN AWARD 2023**  **reddot winner 2023**



1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 $\angle$ M-32° L80|50K

wire springs $\varnothing$ 40-41 $\varnothing$ 4-25

CODE			
	W191361W_		
	W191361B_		


LIGHT COLOUR	LUMEN CRI	CODE
2700K	315 >90	3
3000K	335 >90	5

ALWAYS USE

driver | 250mA | 110-240VAC

CODE	
6W	W90216201
10W phase cut TE	W90226404

more options and specs on page 460



MATCH point

Ceiling recessed



115 | 119



171 | 179



191 | 243



293



307 | 351



371 | 375

1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 $\uparrow$ M-32° L80|50K

wire springs $\varnothing$ 40-41 $\varnothing$ 4-25

CODE			
	W191261W_		
	W191261B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	295 >90	3
3000K	325 >90	5

ALWAYS USE

driver | 250mA | 110-240VAC

CODE	
6W	W90216201
10W phase cut TE	W90226404

more options and specs on page 460



MATCH point trimless

Ceiling recessed



1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80/S0K

45-47 4-26


CODE		
		W191861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	315 >90	3
3000K	335 >90	5

ALWAYS USE

driver | 250mA | 110-240VAC


CODE	
6W	W90216201
10W phase cut TE	W90226404
more options and specs on page 460	





PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

iF DESIGN AWARD 2023
GOOD DESIGN
reddot winner 2023



1.0

LED COB 9W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 0°-90°|350° ✱ M-30° L80|50K

CODE		
	WL177154WW_	
	WL177154BB_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5

MATCH

Ceiling surface



37 | 85 | 91



171 | 179



191 | 243




293



307 | 351



371 | 375



2.0

LED COB 18W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 0°-90°|350° ✱ M-30° L80|50K

CODE		
	WL177254WW_	
	WL177254BB_	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x545 >90	3
3000K	2x550 >90	5



DESIGN
AWARD
2023



reddot winner 2023

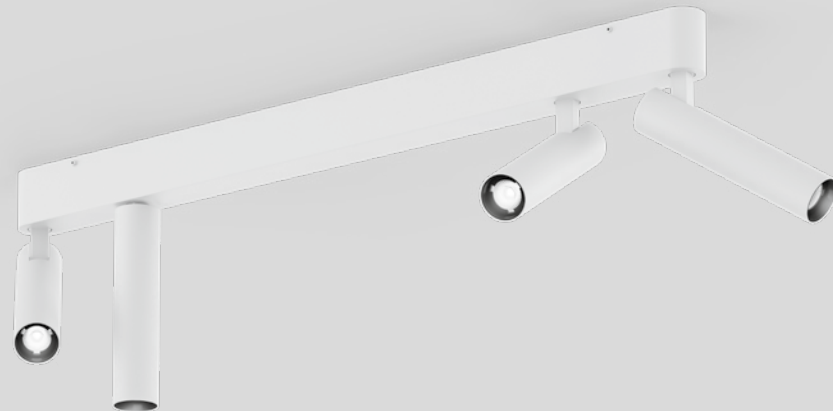

MATCH

Ceiling surface

37 | 85 | 91



171 | 179



191 | 243




293



307 | 351



371 | 375



4.0


LED COB 25W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-30° L80|50K

CODE

WL177454WW
WL177454BB

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x420 >90	3
3000K	4x430 >90	5





RESTAURANT GARDENS | ANDREAS HUHN ARCHITEKTEN TÜBINGEN | GERMANY



MATCH on STREX

48V system



37 | 85 | 91



115 | 119



191 | 243




293



307 | 351



371 | 375



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-30° L80|50K

non dim

	CODE
	W179152W_
	W179152BL_
	W179152CH_
	W179152BQ_
	W179152B_

DALI-2

	CODE
	W179155W_
	W179155BL_
	W179155CH_
	W179155BQ_
	W179155B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530 >90	3
3000K	560 >90	5

accessories on page 470



back



PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

MATCH on STREX

48V system

37 | 85 | 91

115 | 119

191 | 243

293

307 | 351

371 | 375

3.0

LED COB 7W | 48V
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

non dim

	CODE
	W179772W_
	W179772L_
	W179772M_
	W179772Q_
	W179772B_

DALI-2

	CODE
	W179775W_
	W179775L_
	W179775M_
	W179775Q_
	W179775B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

5.0

LED COB 7W | 48V
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

non dim

	CODE
	W179872W_
	W179872L_
	W179872M_
	W179872Q_
	W179872B_

DALI-2

	CODE
	W179875W_
	W179875L_
	W179875M_
	W179875Q_
	W179875B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

back






WEVER & DUCRÉ

178 – 179



MATCH LUSTA

Ceiling suspended

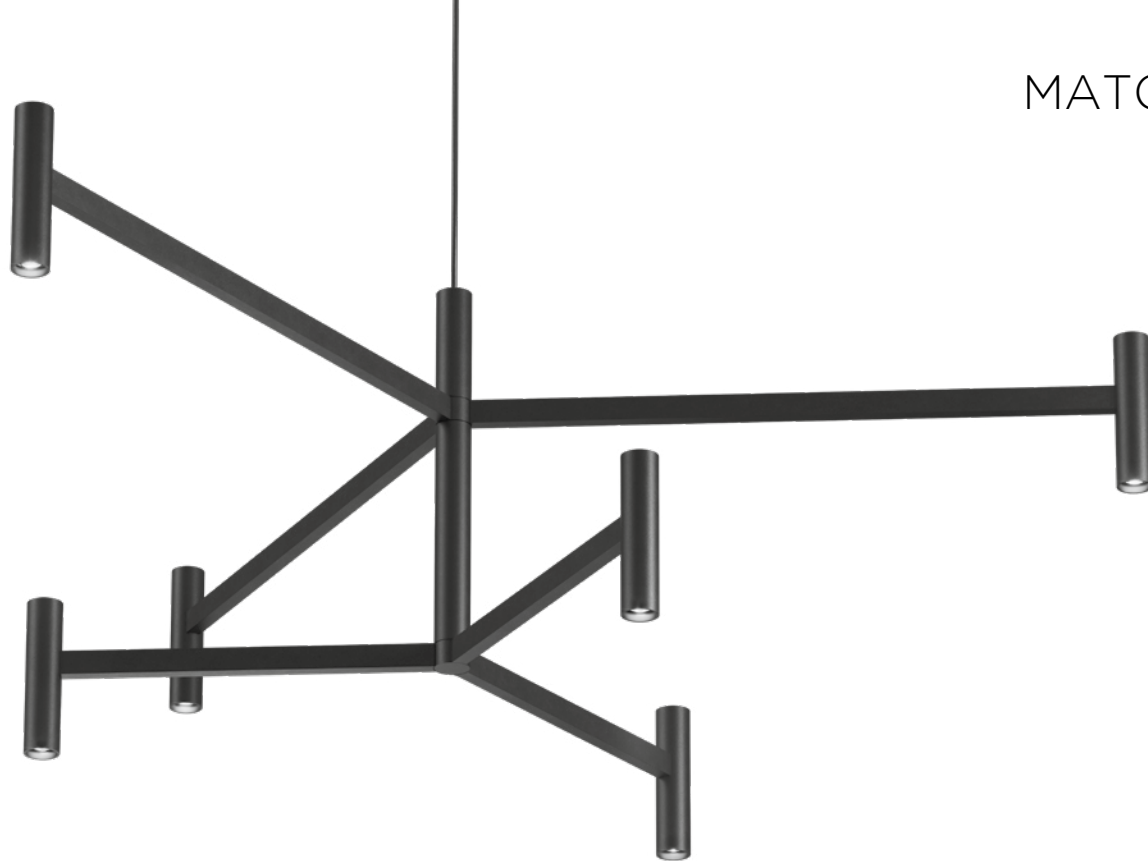

1.0

LED COB 10W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

2700K | CRI >90 | 3x264lm

	CODE
	WL280154M3
	WL280154Q3
	WL280154B3

2.1

LED COB 16W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

2700K | CRI >90 | 6x210lm

	CODE
	WL280254M3
	WL280254Q3
	WL280254B3

3.2

LED COB 16W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30°L80|50K

2700K | CRI >90 | 6x210lm

	CODE
	WL280354M3
	WL280354Q3
	WL280354B3

3.2.1

LED COB 24W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

2700K | CRI >90 | 9x220lm

	CODE
	WL280454M3
	WL280454Q3
	WL280454B3



37 | 85 | 91



115 | 119



171 | 179



293



307 | 351



371 | 375



back



CHOOSE YOUR BASE

AL | Single ceiling base round
6W | 350mA | 110-277VAC
phase cut trailing edge dim

	CODE
	WL914112W0
	WL914112B0

BL | Semi recessed single base

EL | Multi base linear 600mm
3 luminaires | 110-277VAC | 175mA per luminaire | phase cut trailing edge dim

	CODE
	WL914133W0
	WL914133B0

FL | Multi chandelier
more infos on page 239



3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

 IP20  W-54° L80|50K

	CODE
	W279271W_
	W279271L_
	W279271M_
	W279271Q_
	W279271B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

 IP20  W-54° L80|50K

	CODE
	W279371W_
	W279371L_
	W279371M_
	W279371Q_
	W279371B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

MATCH

Low voltage
Ceiling suspended





PRIVATE RESIDENCE | STUDIO BINNEN NETHERLANDS



1.0 SEMI RECESSED


LED COB 4W | 100-277VAC
50-60Hz | incl. driver
aluminium
incl. switch on / off / dim button
USB-C port | installation box

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

U 41x190 ⚡ 12.5-32.5

2700K | CRI >90 | 240lm

CODE	
	WL177554W3
	WL177554L3
	WL177554M3
	WL177554Q3
	WL177554B3



MATCH snooze

Wall recessed

37 | 85 | 91



115 | 119



171 | 179



191 | 243



307 | 351



371 | 375

1.1 SEMI RECESSED



LED COB 4W | 100-277VAC
50-60Hz | incl. driver
aluminium
incl. switch on / off / dim button
installation box

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

U 41x190 ⚡ 12.5-32.5

2700K | CRI >90 | 240lm

CODE	
	WL177654W3
	WL177654B3

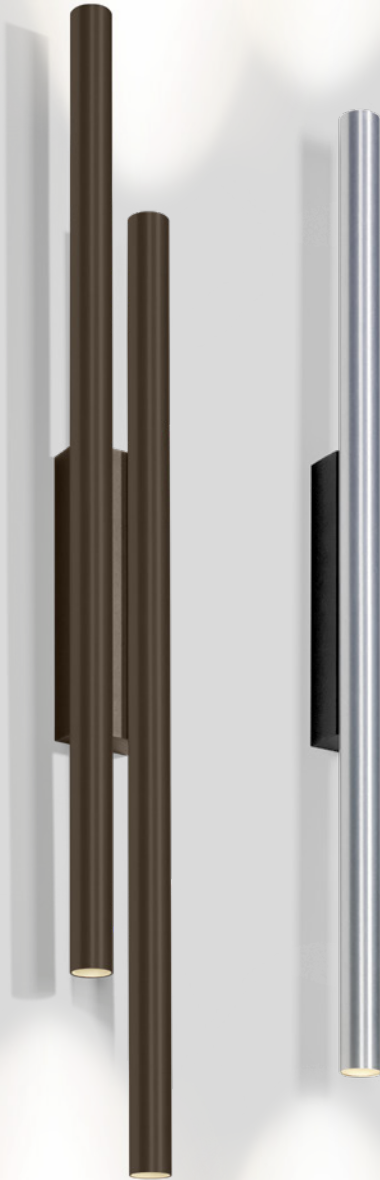

2.0

LED COB 8W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium


⊕ IP20 ⌵ ⚡ M-23° L80|50K

	CODE
	WL377264WW_
	WL377264BL_
	WL377264QQ_
	WL377264BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x290 >90	3
3000K	2x300 >90	5

MATCH

Wall surface



4.0

LED COB 23W | 110-277VAC | 50-60Hz
phase cut trailing edge dim | incl. driver
aluminium

⊕ IP20 ⌵ ⚡ M-23° L80|50K

	CODE
	WL377464WW_
	WL377464QQ_
	WL377464BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x415 >90	3
3000K	4x440 >90	5



PRIVATE RESIDENCE AUSTRIA



MATCH snooze

Wall surface 37 | 85 | 91



115 | 119



171 | 179




191 | 243



293



371 | 375




1.0

LED COB 6W | 110-277VAC | 50-60Hz
incl. driver | incl. switch on/off
aluminium

⊕ IP20 0°-90°|350° A-M-30° L80|50K

		CODE
	WL177353W_	
	WL177353Q_	
	WL177353B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	330 >90	3
3000K	340 >90	5





□ IP20 45°|0°-145° A M-30° L80|50K

CODE

.....
_477254B3
.....

EU/C	W ...
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

WEVER & DUCRÉ 370–371

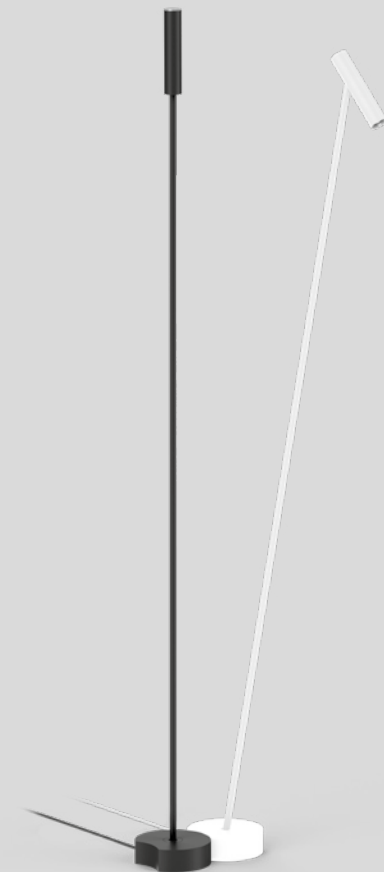

MATCH


Floor 37 | 85 | 91




115 | 119



171 | 179




191 | 243



293



307 | 351



1.0

LED COB 8W | dimmable
100-240VAC | 50-60Hz | incl. driver
aluminium
integrated dimmer button

□ IP20 0°-10°|360°|0°-145° ⚡ M-30° L80|50K

2700K | CRI >90 | 505lm

	CODE
□	_477354W3
■	_477354B3

PLUG TYPE	CODE
EU/C	W ...
INT incl. A	WL ...