






PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	W914110W0
	W914110B0


BH | Semi recessed single base
ceiling base round | ø84

	CODE
	W914150W0
	W914150B0

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
IH | Wall base
more infos on page 253

1.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal hand blown glass
white cable on request



1800-2850K | CRI >90 | 375lm

	CODE
	_236188P9


1800-2850K | >90 CRI | 525lm

	CODE
	_236188B9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

2.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal hand blown glass
white cable on request



1800-2850K | CRI >90 | 385lm

	CODE
	_236288P9


1800-2850K | >90 CRI | 510lm

	CODE
	_236288B9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

3.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal hand blown glass
white cable on request



1800-2850K | CRI >90 | 445lm

	CODE
	_236388P9

1800-2850K | >90 CRI | 530lm

	CODE
	_236388B9




VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...





WETRO

High voltage
Ceiling suspended



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	W914110W0
	W914110B0

BH | Semi recessed single base
ceiling base round | ø84

	CODE
	W914150W0
	W914150B0

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
IH | Wall base

more infos on page 253

1.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

□ IP20 L80/50K

1800-2850K | CRI >90 | 615lm

	CODE
	_236188TS9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

2.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

□ IP20 L80/50K

1800-2850K | CRI >90 | 510lm

	CODE
	_236288TS9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

3.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

□ IP20 L80/50K

1800-2850K | CRI >90 | 530lm





	CODE
	_236388TS9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...



WETRO

High voltage
Ceiling suspended

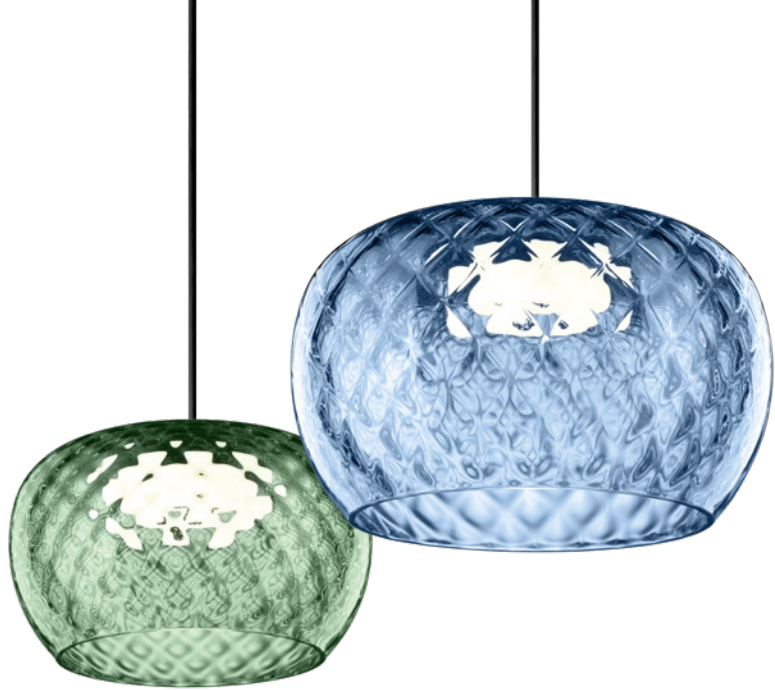

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CODE
	W914110W0
	W914110B0

BH | Semi recessed single base
ceiling base round | ø84

	CODE
	W914150W0
	W914150B0

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
IH | Wall base
more infos on page 253

1.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

IP20 L80/50K

1800-2850K | CRI >90 | 520lm

	CODE
	_236188TD9
	_236188YD9
	_236188GD9
	_236188BD9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

2.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

IP20 L80/50K

1800-2850K | CRI >90 | 480lm

	CODE
	_236288TD9
	_236288YD9
	_236288GD9
	_236288BD9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...

3.0


LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request

IP20 L80/50K

1800-2850K | CRI >90 | 495lm

	CODE
	_236388TD9
	_236388YD9
	_236388GD9
	_236388BD9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...





WETRO

High voltage
Ceiling suspended



CHOOSE YOUR BASE


AH | Single base
ceiling base round | ø83

	CODE
	W914110W0
	W914110B0

BH | Semi recessed single base
ceiling base round | ø84


	CODE
	W914150W0
	W914150B0

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
IH | Wall base
more infos on page 253



1.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request




1800-2850K | CRI >90 | 495lm

	CODE
	_236188TW9

1800-2850K | CRI >90 | 455lm


	CODE
	_236188DW9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...



2.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request




1800-2850K | CRI >90 | 435lm

	CODE
	_236288TW9

1800-2850K | CRI >90 | 420lm


	CODE
	_236288DW9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...



3.0

LED PCB 12W | 50-60Hz
phase cut trailing edge dim
artisanal Italian hand blown glass
white cable on request



1800-2850K | CRI >90 | 455lm

	CODE
	_236388TW9

1800-2850K | CRI >90 | 440lm

	CODE
	_236388DW9

VOLTAGE	CODE
220-240VAC	W ...
110-130VAC	WL ...