

FLOS

F3744000 Glass


Luce Orizzontale S2

Designed by Ronan & Erwan Bouroullec, 2022

145W - 6682lm - 2700K - CRI> 95

Suspension lamp emitting direct and indirect light. Composed of interconnected cylindrical poured glass modules with an internal structure in polished extruded aluminium housing two linear LED modules. Power supply unit and DALI dimmer integrated into the ceiling rose. Touch control button positioned at one end of the product with control options: TOUCH, PUSH & TOUCH, DALI & TOUCH. Dimming range 10–100%. LED modules are removable and replaceable for maintenance.

Designed by Ronan and Erwan Bouroullec, Luce Orizzontale perfectly blends craftsmanship and technology. Developed from an ambitious Flos Bespoke project for the Bourse de Commerce in Paris, the design explores the expressive potential of cast glass and its interaction with light. The glass modules are produced through an artisanal rotating-mould process, making each element unique. Modular and adaptable, it offers versatility without losing its quiet, poetic presence. A contemporary expression of artisanal skill, Luce Orizzontale reflects the Bouroullecs' ability to simplify complexity through design.

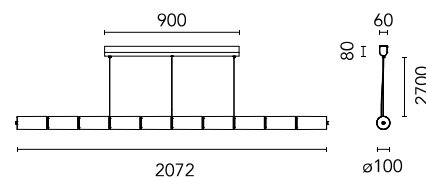

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions

↓ PDF

Photometric Files

ULD

↓ ULD

Technical Drawings

2D

↓ DWG

3D

↓ ZIP

Main specifications


EAN	8059607081273
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	145
Lumen Output (lm)	6682

Physical


Colour	Glass
Length (mm)	2072
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	White
Canopy length/diameter (mm)	900
Canopy width (mm)	61
Canopy height (mm)	78
Net weight (kg)	34.3
Package volume (m3)	0.22
IP internal	20

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional




Photometric

Lighting type	Direct, Indirect
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED current (mA)	600
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmer on board
Dimming interface	Dimmer Integrated

Spare Parts

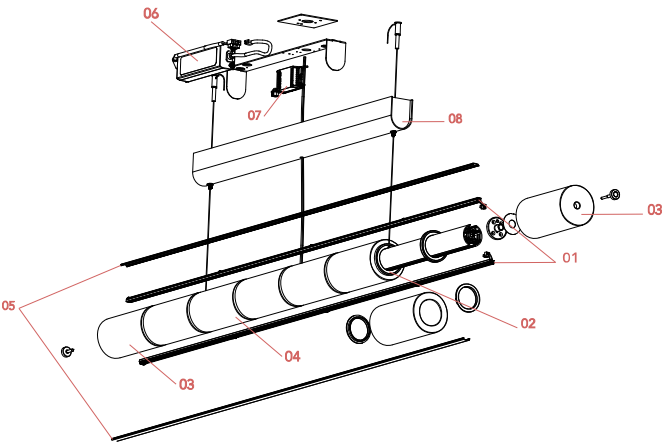

00.	Luce Orizzontale Suspension 2 Accessories kit	RF34045
00.	Luce Orizzontale/Sferica/Cilindrica 4-piece spacer ring kit	RF39006
01.	Luce Orizzontale Suspension 2 Led board	RF3747300
02.	Luce Orizzontale/Sferica/Cilindrica Ring and 4 meters steel wire cable	RF3746200
03.	Luce Orizzontale Closed glass difusser	RF3746300
04.	Luce Orizzontale Open glass difusser	RF3746400
05.	Luce Orizzontale Suspension 2 Linear diffuser	RF3747200
06.	Luce Orizzontale Driver assembly	RF3750400
07.	Luce Orizzontale/Sferica/Cilindrica Ceiling rose dimmer	RF36893
08.	Luce Orizzontale Suspension ½ Ceiling rose cover	RF3746600



RF34045

Luce Orizzontale Suspension 2
Accessories kit



RF39006

Luce
Orizzontale/Sferica/Cilindrica 4-
piece spacer ring kit



RF3747300

Luce Orizzontale Suspension 2
Led board



RF3746200

Luce
Orizzontale/Sferica/Cilindrica Ring
and 4 meters steel wire cable



RF3746300

Luce Orizzontale Closed glass
diffuser



RF3746400

Luce Orizzontale Open glass
diffuser



RF3747200

Luce Orizzontale Suspension 2
Linear diffuser



RF3750400

Luce Orizzontale Driver assembly



RF36893

Luce
Orizzontale/Sferica/Cilindrica
Ceiling rose dimmer



RF3746600

Luce Orizzontale Suspension ½
Ceiling rose cover